

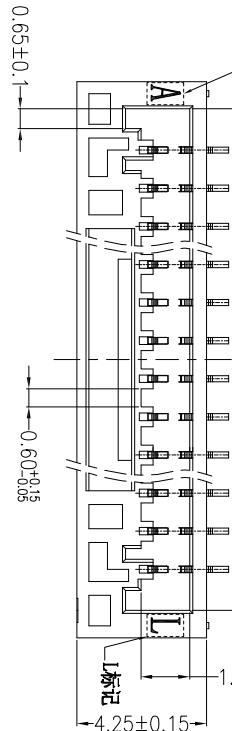


A


DIM C^{+0.2}_{-0.1}




CAP (Apply to Reel)

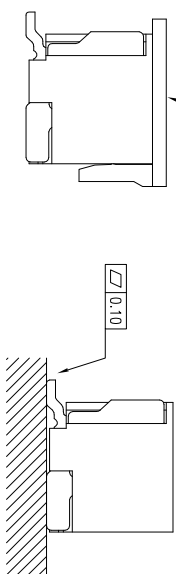

SECTION B-B




SECTION A-A

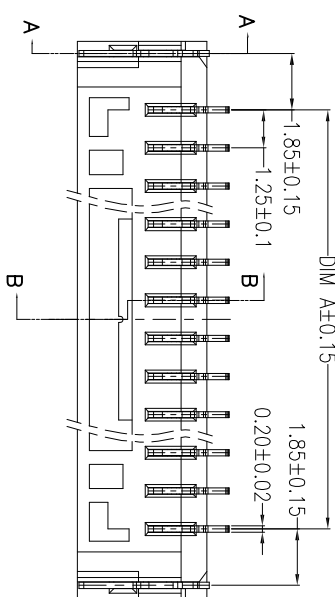

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
额定电压 (Rated voltage): 50V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	LCP (UL94V-0)	Beige
B	Contacts	2~15	PhosphorBronze	Tin-plated
C	Solder Tab	2	PhosphorBronze	Tin-plated

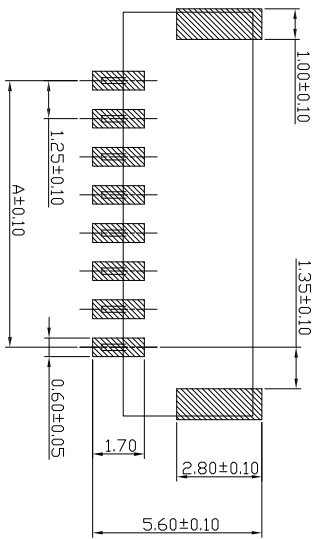

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

孔位	尺寸			孔位	尺寸		
	DIM A	DIM B	DIM C		DIM A	DIM B	DIM C
2P	1.25	5.75	3.95	9P	10.00	14.50	12.70
3P	2.50	7.00	5.20	10P	11.25	15.75	13.95
4P	3.75	8.25	6.45	11P	12.50	17.00	15.20
5P	5.00	9.50	7.70	12P	13.75	18.25	16.45
6P	6.25	10.75	8.95	13P	15.00	19.50	17.70
7P	7.50	12.00	10.20	14P	16.25	20.75	18.95
8P	8.75	13.25	11.45	15P	17.50	22.00	20.20

QWYCONN 深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

UNITS		PART NO. (INTENDED USE)		TITLE:	
MATL	mm	GH1.25-nAB		GH1.25 立贴插座	
FINISH		APPD:		DWG NO.:	
X ± 0.3		X ± 5°		GH1.25-nAB	
X ± 0.25		X ± 2°		SCALE	
XX ± 0.20		XX ± 1°		1/1	
XXX ± 0.10		XXX ± 0.5°		SHEET	
QTY		CHKD:		REV.	
PCS		DR: HU 2016.09.28		1/1	