

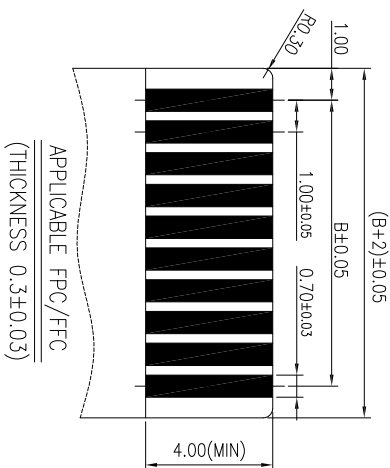
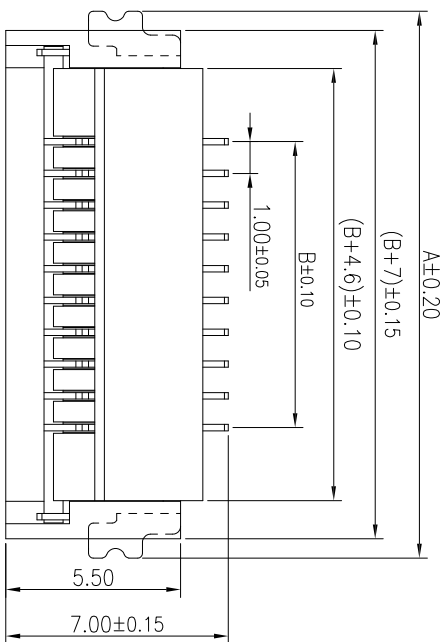







APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)


- NOTES:
- 1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
 - 2.ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
 - 3.TERMIAL:PHOSPHOR BRONZE
 - PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
 - 4.FITTING NAL:BRASS
 - PLATING:MATTE-TIN OR TIN (LEAD FREE)

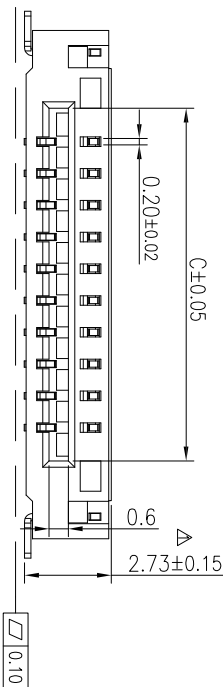

No. of contacts	Dimensions			No. of contacts	Dimensions		
	A	B	C		A	B	C
4	11.21	3.0	5.05	21	28.21	20.0	22.05
5	12.21	4.0	6.05	22	29.21	21.0	23.05
6	13.21	5.0	7.05	23	30.21	22.0	24.05
7	14.21	6.0	8.05	24	31.21	23.0	25.05
8	15.21	7.0	9.05	25	32.21	24.0	26.05
9	16.21	8.0	10.05	26	33.21	25.0	27.05
10	17.21	9.0	11.05	27	34.21	26.0	28.05
11	18.21	10.0	12.05	28	35.21	27.0	29.05
12	19.21	11.0	13.05	29	36.21	28.0	30.05
13	20.21	12.0	14.05	30	37.21	29.0	31.05
14	21.21	13.0	15.05	31	38.21	30.0	32.05
15	22.21	14.0	16.05	32	39.21	31.0	33.05
16	23.21	15.0	17.05	33	40.21	32.0	34.05
17	24.21	16.0	18.05	34	41.21	33.0	35.05
18	25.21	17.0	19.05	35	42.21	34.0	36.05
19	26.21	18.0	20.05	36	43.21	35.0	37.05
20	27.21	19.0	21.05	37	44.21	36.0	38.05

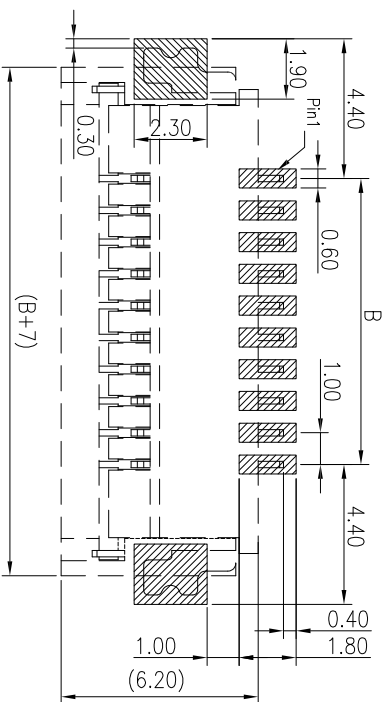

CABLE INSERT DIM.



QWYCONN 深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE)
10273-GX-nPWB

TITLE:
1. 0前插后掀盖大锁扣 H2.73

FINISH
X± 0.3 X± 5°
X± 0.25 X± 2°

QTY
PCS

CHKD:
DR: HU 2016.09.28

SCALE
1/1

SHEET
1/1



RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05