

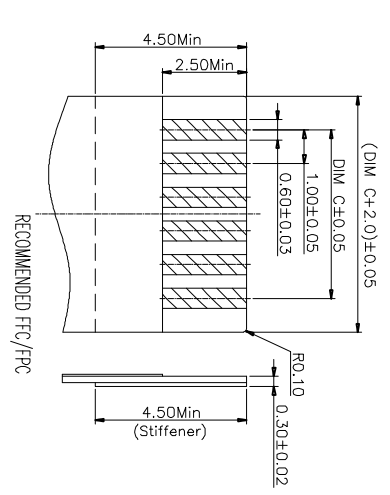
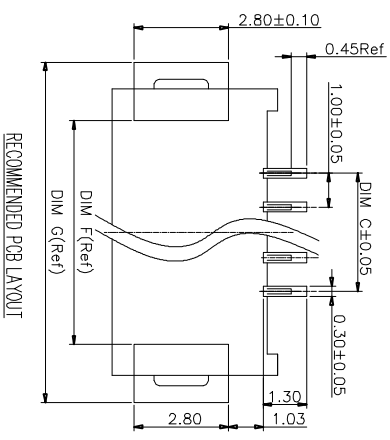
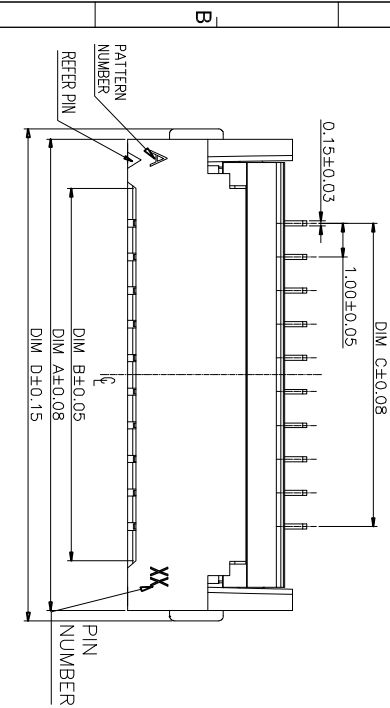
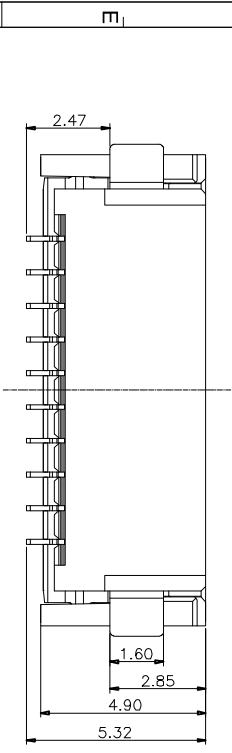


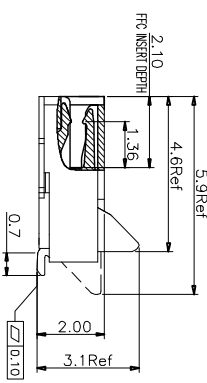


Pin No.	P/N	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G
4	8.04A0.004200	8.00	5.05	3.00	8.60	6.60	6.40	9.60
5	8.04A0.005200	9.00	6.05	4.00	9.60	7.60	7.40	10.60
6	8.04A0.006200	10.00	7.05	5.00	10.60	8.60	8.40	11.60
7	8.04A0.007200	11.00	8.05	6.00	11.60	9.60	9.40	12.60
8	8.04A0.008200	12.00	9.05	7.00	12.60	10.60	10.40	13.60
9	8.04A0.009200	13.00	10.05	8.00	13.60	11.60	11.40	14.60
10	8.04A0.010200	14.00	11.05	9.00	14.60	12.60	12.40	15.60
11	8.04A0.012000	15.00	12.05	10.00	15.60	13.60	13.40	16.60
12	8.04A0.012200	16.00	13.05	11.00	16.60	14.60	14.40	17.60
13	8.04A0.013200	17.00	14.05	12.00	17.60	15.60	15.40	18.60
14	8.04A0.014200	18.00	15.05	13.00	18.60	16.60	16.40	19.60
15	8.04A0.015200	19.00	16.05	14.00	19.60	17.60	17.40	20.60
16	8.04A0.016200	20.00	17.05	15.00	20.60	18.60	18.40	21.60
17	8.04A0.017200	21.00	18.05	16.00	21.60	19.60	19.40	22.60
18	8.04A0.018200	22.00	19.05	17.00	22.60	20.60	20.40	23.60
19	8.04A0.019200	23.00	20.05	18.00	23.60	21.60	21.40	24.60
20	8.04A0.020200	24.00	21.05	19.00	24.60	22.60	22.40	25.60
21	8.04A0.021200	25.00	22.05	20.00	25.60	23.60	23.40	26.60
22	8.04A0.022200	26.00	23.05	21.00	26.60	24.60	24.40	27.60
23	8.04A0.023200	27.00	24.05	22.00	27.60	25.60	25.40	28.60
24	8.04A0.024200	28.00	25.05	23.00	28.60	26.60	26.40	29.60
25	8.04A0.025200	29.00	26.05	24.00	29.60	27.60	27.40	30.60
26	8.04A0.026200	30.00	27.05	25.00	30.60	28.60	28.40	31.60
27	8.04A0.027200	31.00	28.05	26.00	31.60	29.60	29.40	32.60
28	8.04A0.028200	32.00	29.05	27.00	32.60	30.60	30.40	33.60
29	8.04A0.029200	33.00	30.05	28.00	33.60	31.60	31.40	34.60
30	8.04A0.030200	34.00	31.05	29.00	34.60	32.60	32.40	35.60
36	8.04A0.036200	40.00	37.05	35.00	40.60	38.60	38.40	41.60
40	8.04A0.040200	44.00	41.05	39.00	44.60	42.60	42.40	45.60

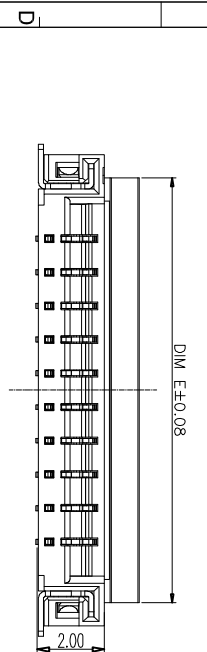

- FPC NOT MATING CONDITION BANNED CLOSURE
- PART NO. LEGEND:
8.04A0.***200
①②③④⑤
- SERIES NAME:8.04A0=1.0MM FFC/FFC DUAL CONTACT SIDE CONNECTOR (H=2.0mm)
- CONTACT PIN NUMBER:***=CONTACT PIN NUMBER
- CONTACT PLATING SPEC: PART GOLD PLATING:2=1~30°3=50°4=100°5=150°
- UNSPECIFIED=0=NONSENSE
- PERFORMANCE:
3.1: CURRENT RATING: 0.5A/PIN
3.2: VOLTAGE RATING: 50V AC/DC.
3.3: CONTACT RESISTANCE: INITIAL VALUE 30mΩHM Max,
3.4: INSULATION RESISTANCE: 500MΩHM Min.
3.5: DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1MINUTE;
3.6: DURABILITY: 20 TIMES Min.
3.7: OPERATING TEMPERATURE:
OPERATING HUMIDITY RANGE: 20% TO 85%

4	STATOR	BRASS		2
3	TERMINAL	PHOSPHOR BRONZE		
2	COVER	THERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

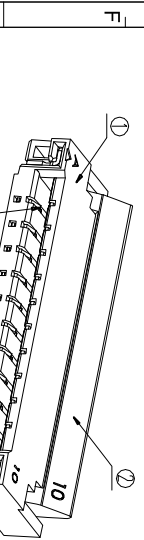

UNITS	mm
MATL	
FINISH	
QTY	
DR: HU 2016.09.25	

PART NO.(INTENDED USE)	8.04A0.***200
APPD:	
CHKD:	
DWG NO.:	1020-CX-nPMB
TITLE:	1.0mm FFC/FFC DUAL CONTACT SIDE CONNECTOR(H=2.0mm)

深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

SCALE	1/1
SHEET	1/1
REV.	A