
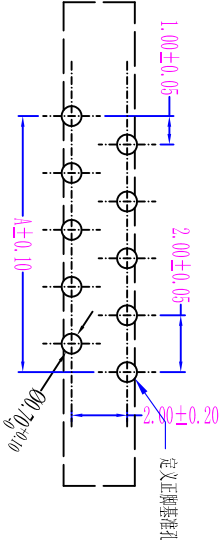
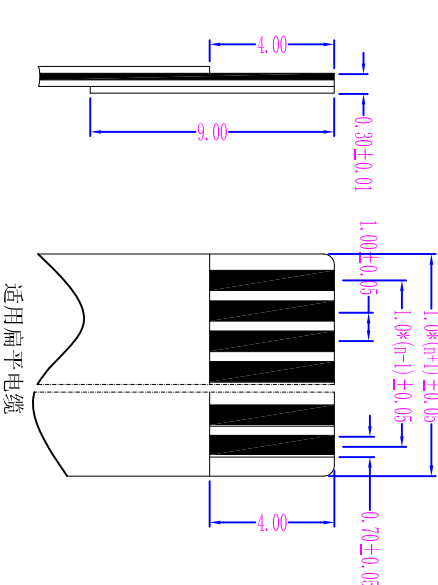
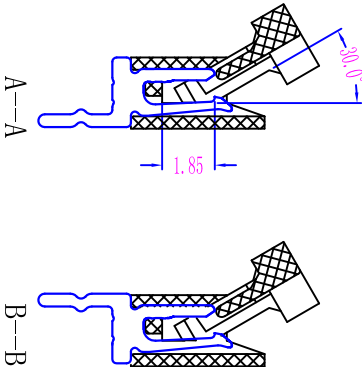

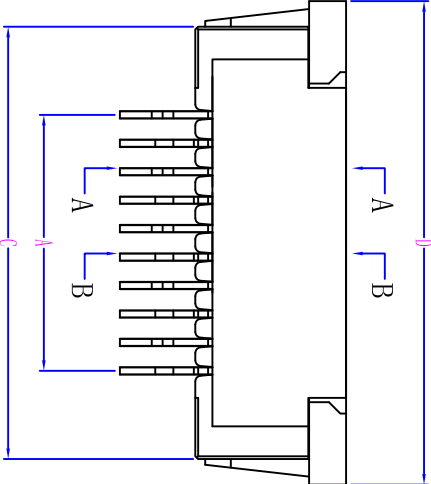


1.0mm PITCH FPC CONNECTORS

性能：
额定电流：0.5A
额定电压：50V
耐电压：500V
接触电阻： $\leq 20m\Omega$
绝缘电阻：800M Ω
工作温度：-20℃~+85℃

零件（材质）：LCP, UL94V-0
铆扣（材质）：LCP, UL94V-0
插簧（材质）：磷青铜, 镀锡/镀金



孔位	A	B	C	D
2	1	3.15	7.2	9.1
3	2	4.15	8.2	10.1
4	3	5.15	9.2	11.1
5	4	6.15	10.2	12.1
6	5	7.15	11.2	13.1
7	6	8.15	12.2	14.1
8	7	9.15	13.2	15.1
9	8	10.15	14.2	16.1
10	9	11.15	15.2	17.1
11	10	12.15	16.2	18.1
12	11	13.15	17.2	19.1
13	12	14.15	18.2	20.1
14	13	15.15	19.2	21.1
15	14	16.15	20.2	22.1
16	15	17.15	21.2	23.1
17	16	18.15	22.2	24.1
18	17	19.15	23.2	25.1
19	18	20.15	24.2	26.1
20	19	21.15	25.2	27.1
21	20	22.15	26.2	28.1
22	21	23.15	27.2	29.1
23	22	24.15	28.2	30.1
24	23	25.15	29.2	31.1
25	24	26.15	30.2	32.1
26	25	27.15	31.2	33.1
27	26	28.15	32.2	34.1
28	27	29.15	33.2	35.1
29	28	30.15	34.2	36.1
30	29	31.15	35.2	37.1
31	30	32.15	36.2	38.1
32	31	33.15	37.2	39.1
33	32	34.15	38.2	40.1
34	33	35.15	39.2	41.1
35	34	36.15	40.2	42.1

UNITS		TITILE:	
MAT'L	mm	1.0mm FPC (H型) 直插式(正脚)	
FINISH		1.0K-11-nP	
Q'TY		SC	
X.± 0.3		X.± 5'	
.X± 0.25		.X± 2'	
.XX± 0.20		.XX± 1'	
.XXX± 0.10		.XXX± 0.5'	
DWG NO.:		100K18-HU00000000	
CHKD:		100K18-HU00000000	
DR:		HU 2016.09.25	

PCB Layout										UNITS mm	
PART NO.(INTENDED USE) 1. 0K-II-nP										TITLE: 1. 0mm PFC (H型) 直插式 (正脚)	
APPD: CHKD:										DWG NO.: 100K18-IIH00000000	
.X ± 0.3										.X ± 5°	
.X ± 0.25										.X ± 2°	
.XX ± 0.20										.XX ± 1°	
.XXX ± 0.10										.XXX ± 0.5°	
FINISH										QTY	
SC										REV.	
DR: HU 2016. 09. 25										SCALE 1/1	
1										2	
3										4	
5										6	
7										8	
9										10	