

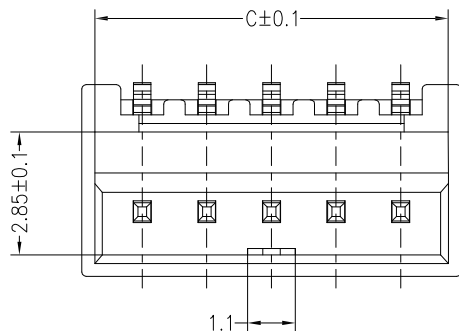
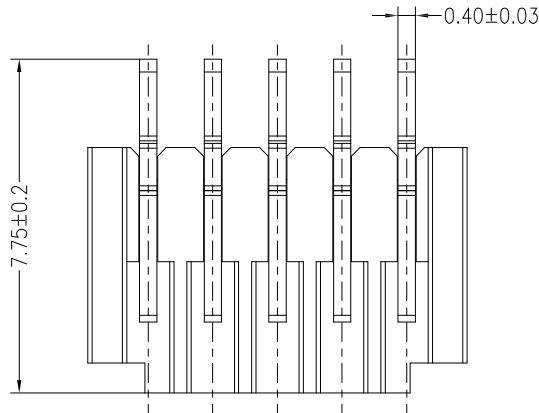
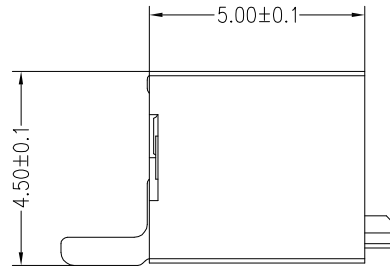
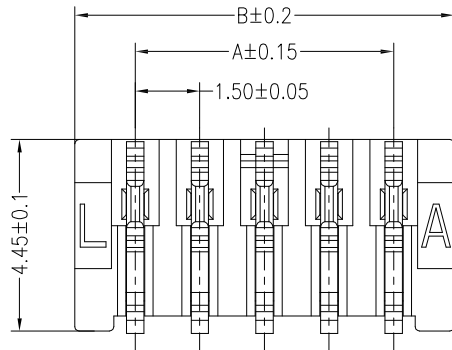


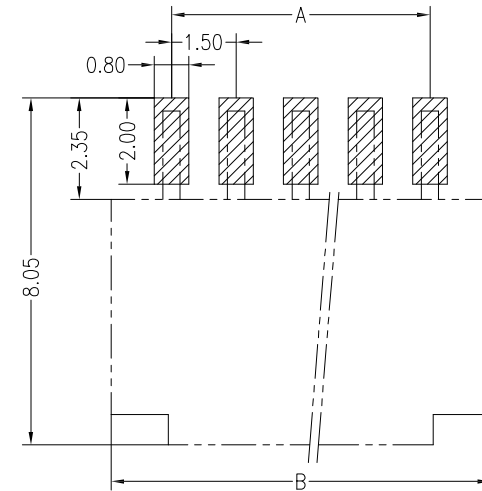

PIN	DIM A	DIM B	DIM C
2pin	1.50	4.30	3.70
3pin	3.00	5.80	5.20
4pin	4.50	7.30	6.70
5pin	6.00	8.80	8.20
6pin	7.50	10.30	9.70
7pin	9.00	11.80	11.20
8pin	10.50	13.30	12.70
9pin	12.00	14.80	14.20
10pin	13.50	16.30	15.70
11pin	15.00	17.80	17.20
12pin	16.50	19.30	18.70
13pin	18.00	20.80	20.20
14pin	19.50	22.30	21.70
15pin	21.00	23.80	23.20



PCB LAYOUT

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 350V AC DC

额定电流 (Rated current): 3.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

B	CONTACT	2~15 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

UNITS		mm		
MAT'L		QWYCONN® 深圳市启崴源电子有限公司		
FINISH		SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.		
Q'TY		PART NO.(INTENDED USE)		
PCS		A1504AWR-**		
DR:		TITLE:		
HU 2016.09.28		1.5mm PITCH 90° WAFER SMT TYPE		
CHKD:		DWG NO.:		
A1504AWR-**		A1504AWR-**		
SCALE		SHEET		
1/1		1/1		
REV.		A		

X.± 0.3	X°.± 5°
.X± 0.25	.X°.± 2°
.XX± 0.20	.XX°.± 1°
.XXX± 0.10	.XXX°.± 0.5°