

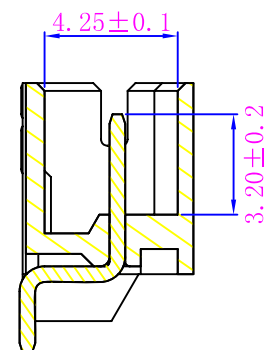
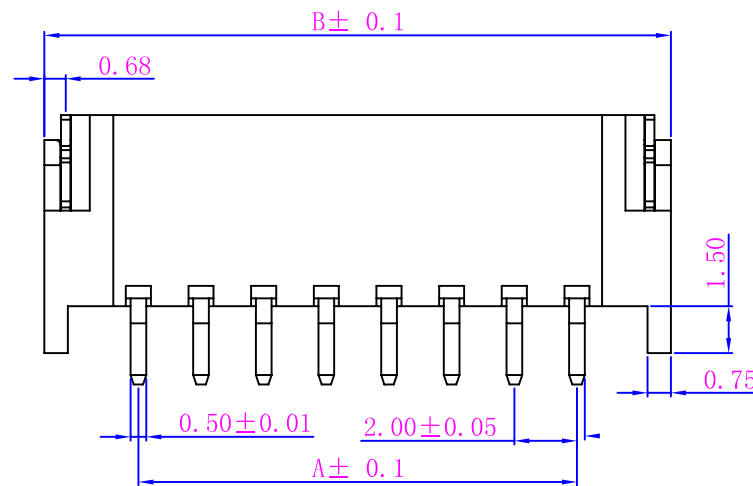
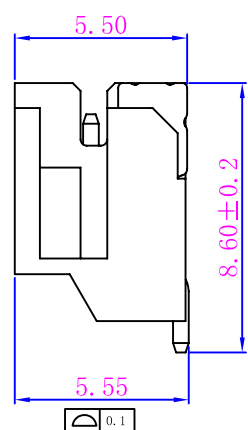


性能:
额定电流: 1A
额定电压: 100V
耐电压: 500V
接触电阻: ≤20mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃

塑件(材质): LCP, UL94V-0
插簧(材质): 黄铜, 镀锡
焊片(材质): 磷青铜, 镀锡

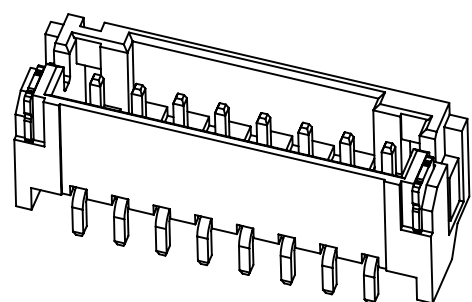

孔位	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80

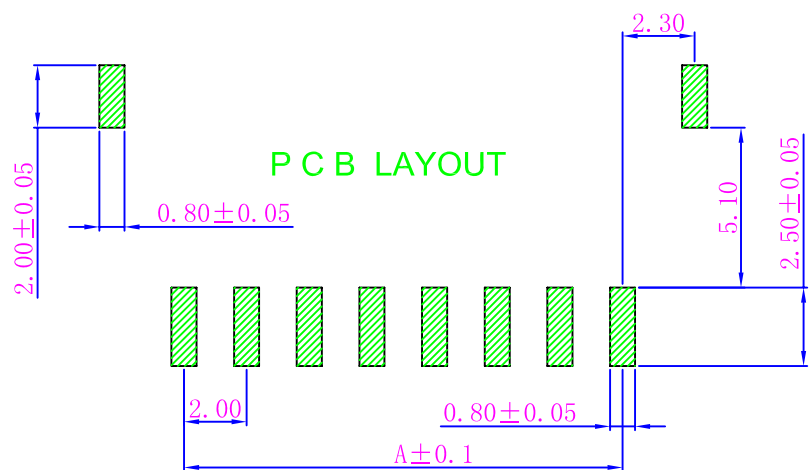

UNITS mm		QWYCONN 深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO.,LTD.				
MAT'L						
PART NO.(INTENDED USE) 2.0-A-nPWB		TITLE: 2.0 卧贴/wafer				
APPD:		DWG NO.:				
FINISH		CHKD:				
Q'TY		DR: HU 2016. 09. 25				
X.± 0.3	X°± 5°			SCALE	SHEET	REV.
.X± 0.25	.X°± 2°			1/1	1/1	A
.XX± 0.20	.XX°± 1°					
.XXX± 0.10	.XXX°± 0.5°					