

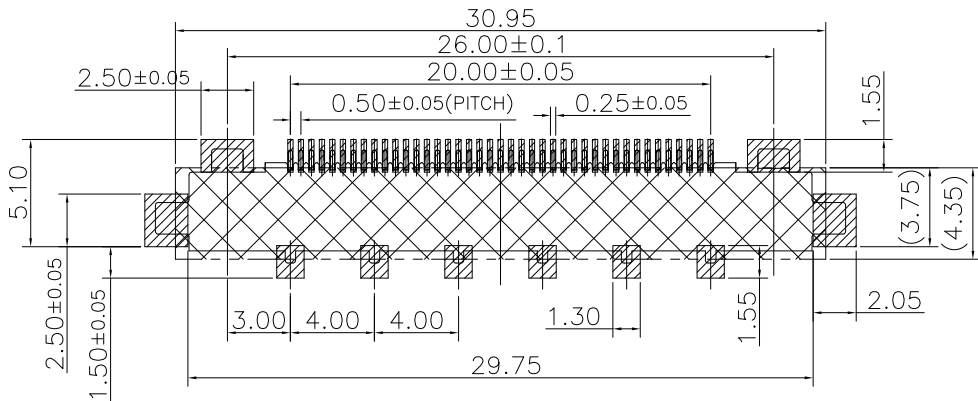
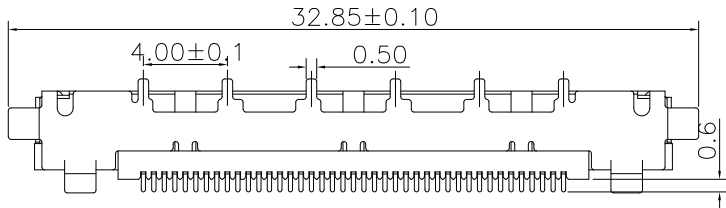
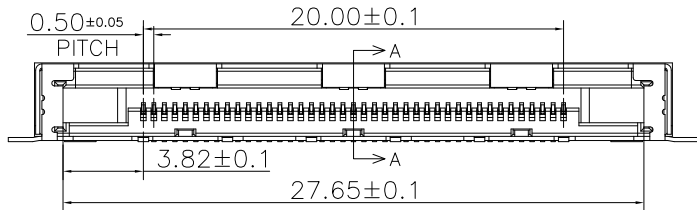
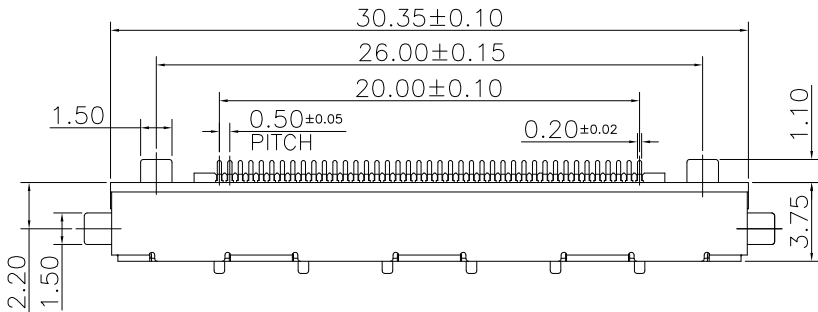



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		




RECOMMEND P.C.B LAYOUT
TOLERANCE : ±0.1



SECTION A-A
SCALE 2:1

NOTES:

- HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- TERMINAL:PHOSPHOR BRONZE
PLATING:50u" MIN NICKEL ALL OVER 100u"MIN Tin ON SOLDER AREA
1u"GOLD FLASH ON CONTACT AREA
- SHELL:STAINLESS STEEL
PLATING:100~150u" TIN(LEAD FREE)
OVERALL 50~100u" NICKEL UNDER PLATED.
- SPECIFICATION:
CURRENT RATING: 0.5A 50V AC/DC
CONTACT RESISTANCE: 40mΩ MAX
INSULATION RESISTANCE: 100MΩ AT 500V DC
OPERATING TEMPERATURE RANGE: -55°C~+85°C
WITHSTANDING VOLTANG: 250V AC/minute

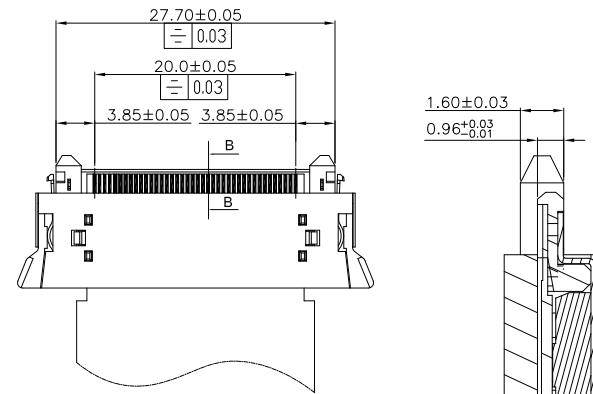

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu			TITLE:			
DIM	TOL	DIM	TOL	0.5mmLVDS连接器H3.75 41P 51P				
X.	±0.25			PART NO.				
X. X	±0.20	X°	±3.0°	05375-NR-GF				
X. XX	±0.15	X. X°		REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1	
X. XXX		X. XX°						
		X. XXX°						