
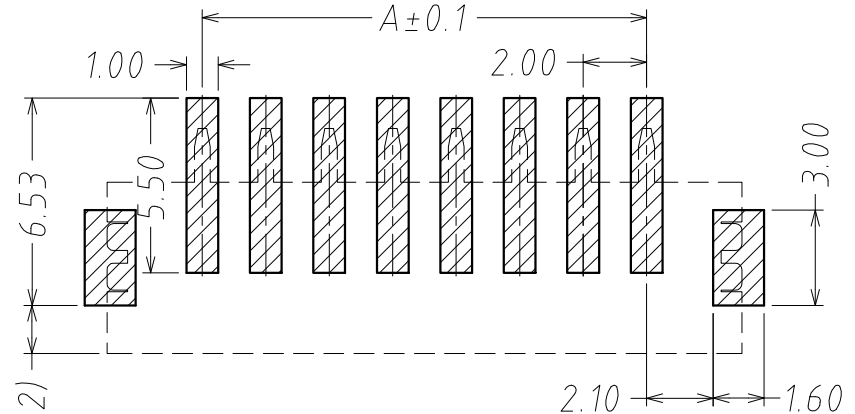


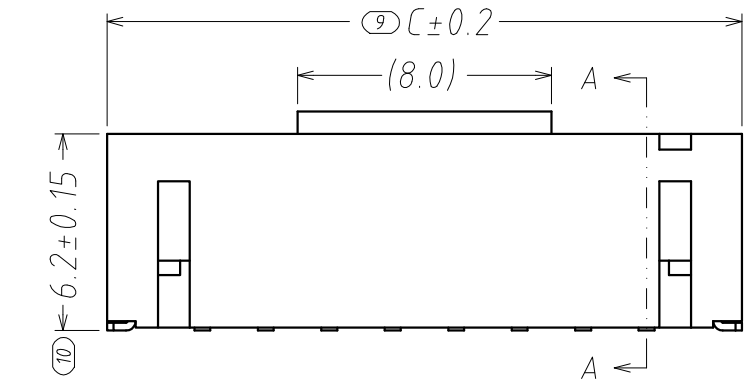
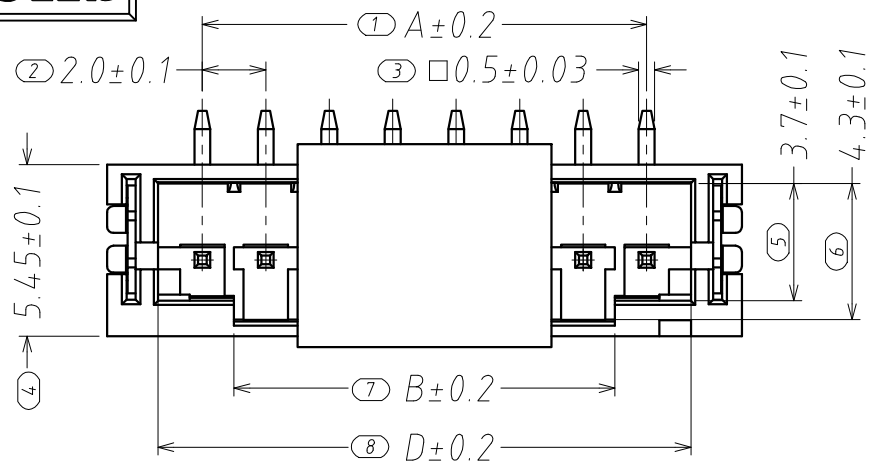


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:
1、所有材料符合ROHS2.0/REACH/HF要求。
2、额定电流: 2A, AC, DC;
3、额定电压: 100V, AC, DC;
4、温度范围: -25℃~+85℃;
5、接触电阻: ≤0.02Ω;
6、绝缘电阻: ≥1000MΩ;
7、耐压: 800V, AC/minute.
8、产品料号:
A10001 - n AB - 03 T1
孔位 ———— T1: 镀亮锡
产品类型 ———— 胶芯材质
AB: 立贴针座 ———— 03: LCP 本色

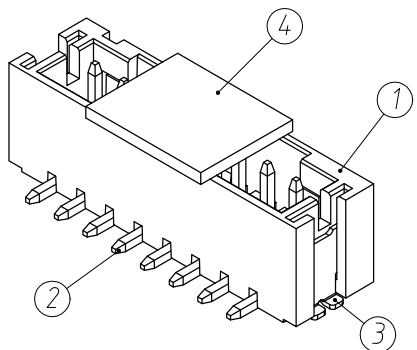

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.00	1.00	8.00	4.80
03	4.00	2.00	10.00	6.80
04	6.00	4.00	12.00	8.80
05	8.00	6.00	14.00	10.80
06	10.00	8.00	16.00	12.80
07	12.00	10.00	18.00	14.80
08	14.00	12.00	20.00	16.80
09	16.00	14.00	22.00	18.80
10	18.00	16.00	24.00	20.80
11	20.00	18.00	26.00	22.80
12	22.00	20.00	28.00	24.80
13	24.00	22.00	30.00	26.80
...	...	...	...	...
20	38.00	36.00	44.00	40.80

4	吸盖 Cap	LCP (UL94V-0)	1	本色
3	焊片 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u" MIN.
2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u" MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名 称	材 料	数 量	附 注

DESIGN: Xiping Huang
CHECK: Ke Tian
APPROVED: Youquan Xu

DIM	TOL	DIM	TOL
X.	±0.25	X°	±3.0°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX		X.XXX°	

广东国连电子有限公司
GUANGDONG GUOLIAN ELECTRONICS CO., LTD

TITLE: PH2.0立贴

PART NO. A20001-nAB-03T1

REV. A SCALE: N/A UNIT: mm SHEET: 1/1