

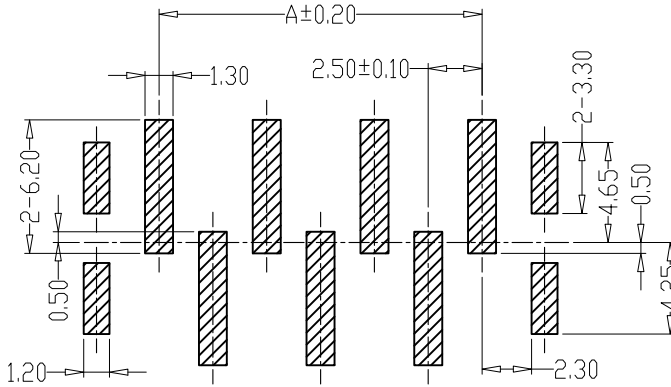



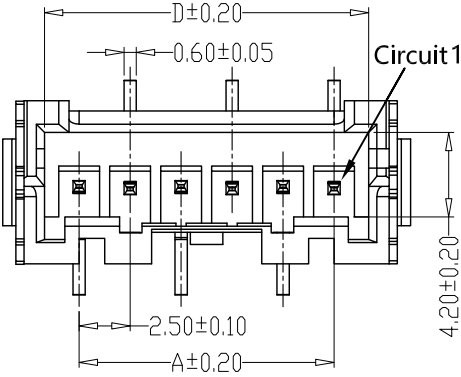
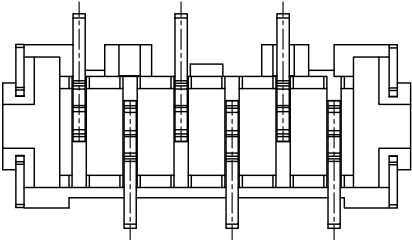
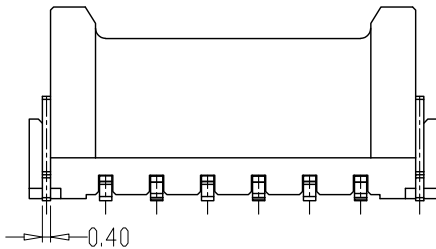


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		


- SPECIFICATIONS
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 1000V AC/minute
 - 7、Material:Wafer PA6T,UL94V-0
PIN Brass Tin-plated
Fixed piece: Brass Tin-plated

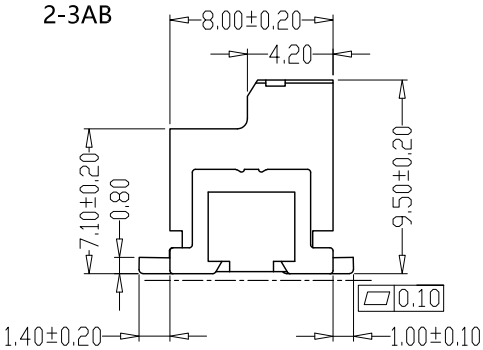


PCB LAYOUT

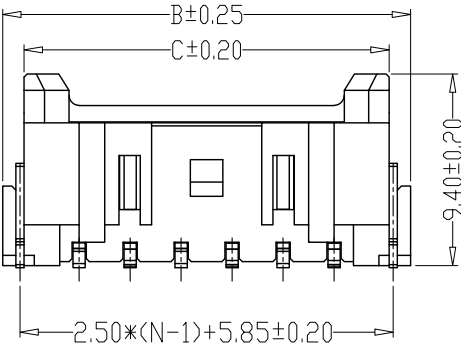

双数P位PIN针类型

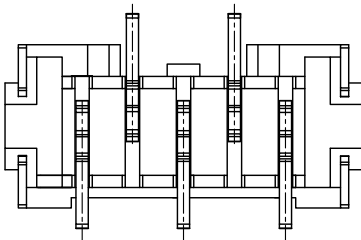

单数P位PIN针类型

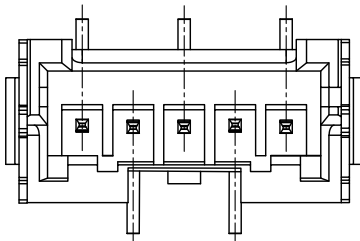

5AB

PIN	尺寸 (mm)			
	A	B	C	D
02	2.50	10.00	7.90	6.00
03	5.00	12.50	10.40	8.50
04	7.50	15.00	12.90	11.00
05	10.00	17.50	15.40	13.50
06	12.50	20.00	17.90	16.00
07	15.00	22.50	20.40	18.50
08	17.50	25.00	22.90	21.00
09	20.00	27.50	25.40	23.50
10	22.50	30.00	27.90	26.00
11	25.00	32.50	30.40	28.50
12	27.50	35.00	32.90	31.00
13	30.00	37.50	35.40	33.50
14	32.50	40.00	37.90	36.00
15	35.00	42.50	40.40	38.50

DESIGN:		Xiping Huang			广东国连电子有限公司				
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD				
APPROVED:		Youquan Xu		TITLE: XA2.54立贴					
DIM	TOL	DIM	TOL	PART NO. XA2.54-NAB					
X.	±0.25	X°	±3.0°	REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1		
X. X	±0.20	X. X°							
X. XX	±0.15	X. XX°							
X. XXX		X. XXX°							