

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:





- 1、所有材料符合ROHS2.0/REACH要求。
- 2、额定电流: 1A, AC, DC;
- 3、额定电压: 50V, AC, DC;
- 4、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 500\Omega$;
- 7、耐压: 500V, AC/minute.
- 8、适用线规: AWG#32 to #26
- 9、产品料号:

A15001 - n AW - 02 T1
孔位
产品类型
AW: 弯针针座
电镀
T1: 镀亮锡
胶芯材质
02: PA66 米色

Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	4.50
03	3.00	5.10	6.00
04	4.50	6.60	7.50
05	6.00	8.10	9.00
06	7.50	9.60	10.50
07	9.00	11.10	12.00
08	10.50	12.60	13.50
09	12.00	14.10	15.00
10	13.50	15.60	16.50
11	15.00	17.10	18.00
12	16.50	18.60	19.50
13	18.00	20.10	21.00
14	19.50	21.60	22.50
15	21.00	23.10	24.00
16	22.50	24.60	25.50

2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底镍30u"MIN,再镀锡80u"MIN.
1	基座 Wafer	PA66(UL94V-0)	1	米色
序号	名称	材料	数量	附注

DESIGN:	Xiping Huang				广东国连电子有限公司			
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:	Youquan Xu			TITLE:				
DIM	TOL	DIM	TOL	ZH1.5弯针针座				
X.	±0.25	X°	±3.0°	PART NO.				
X.X	±0.20	X.X°		A15001-nAW-02T1				
X.XX	±0.15	X.XX°		REV. A SCALE: N/A UNIT: mm SHEET: 1/1 				
X.XXX		X.XXX°						

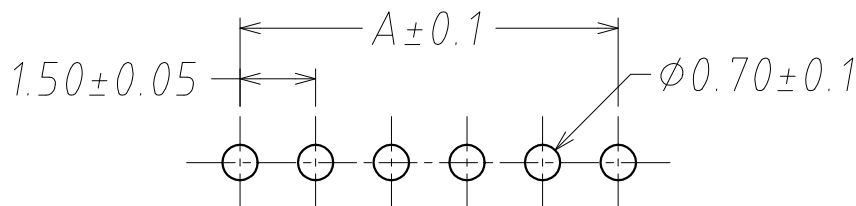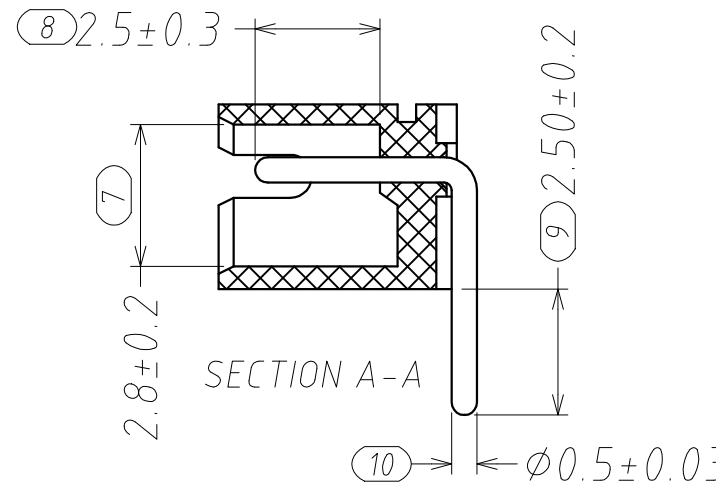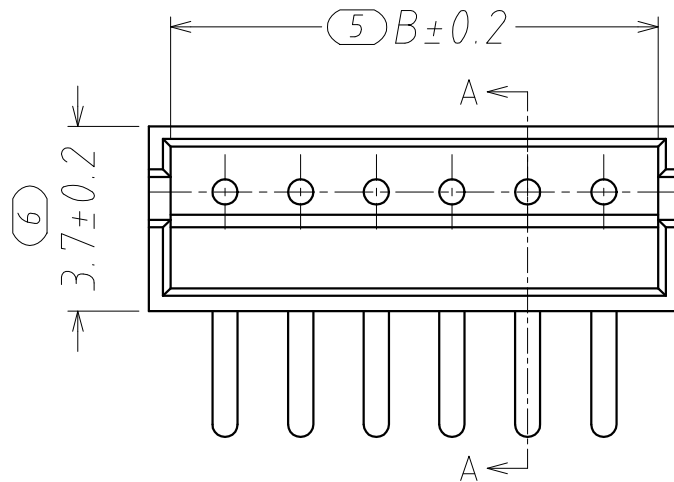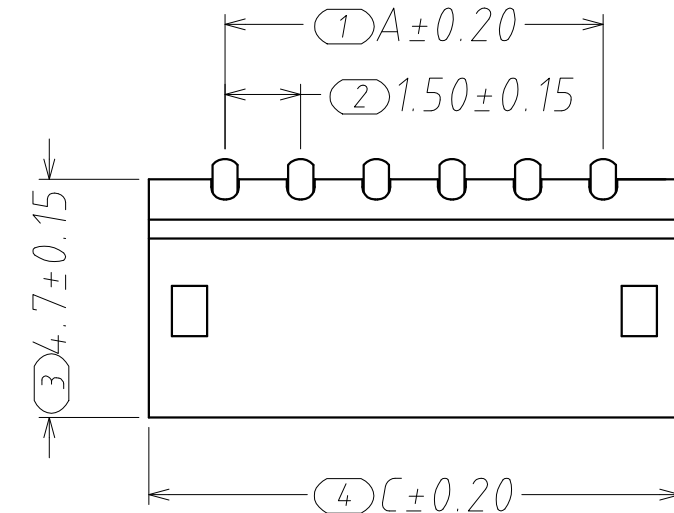

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)