

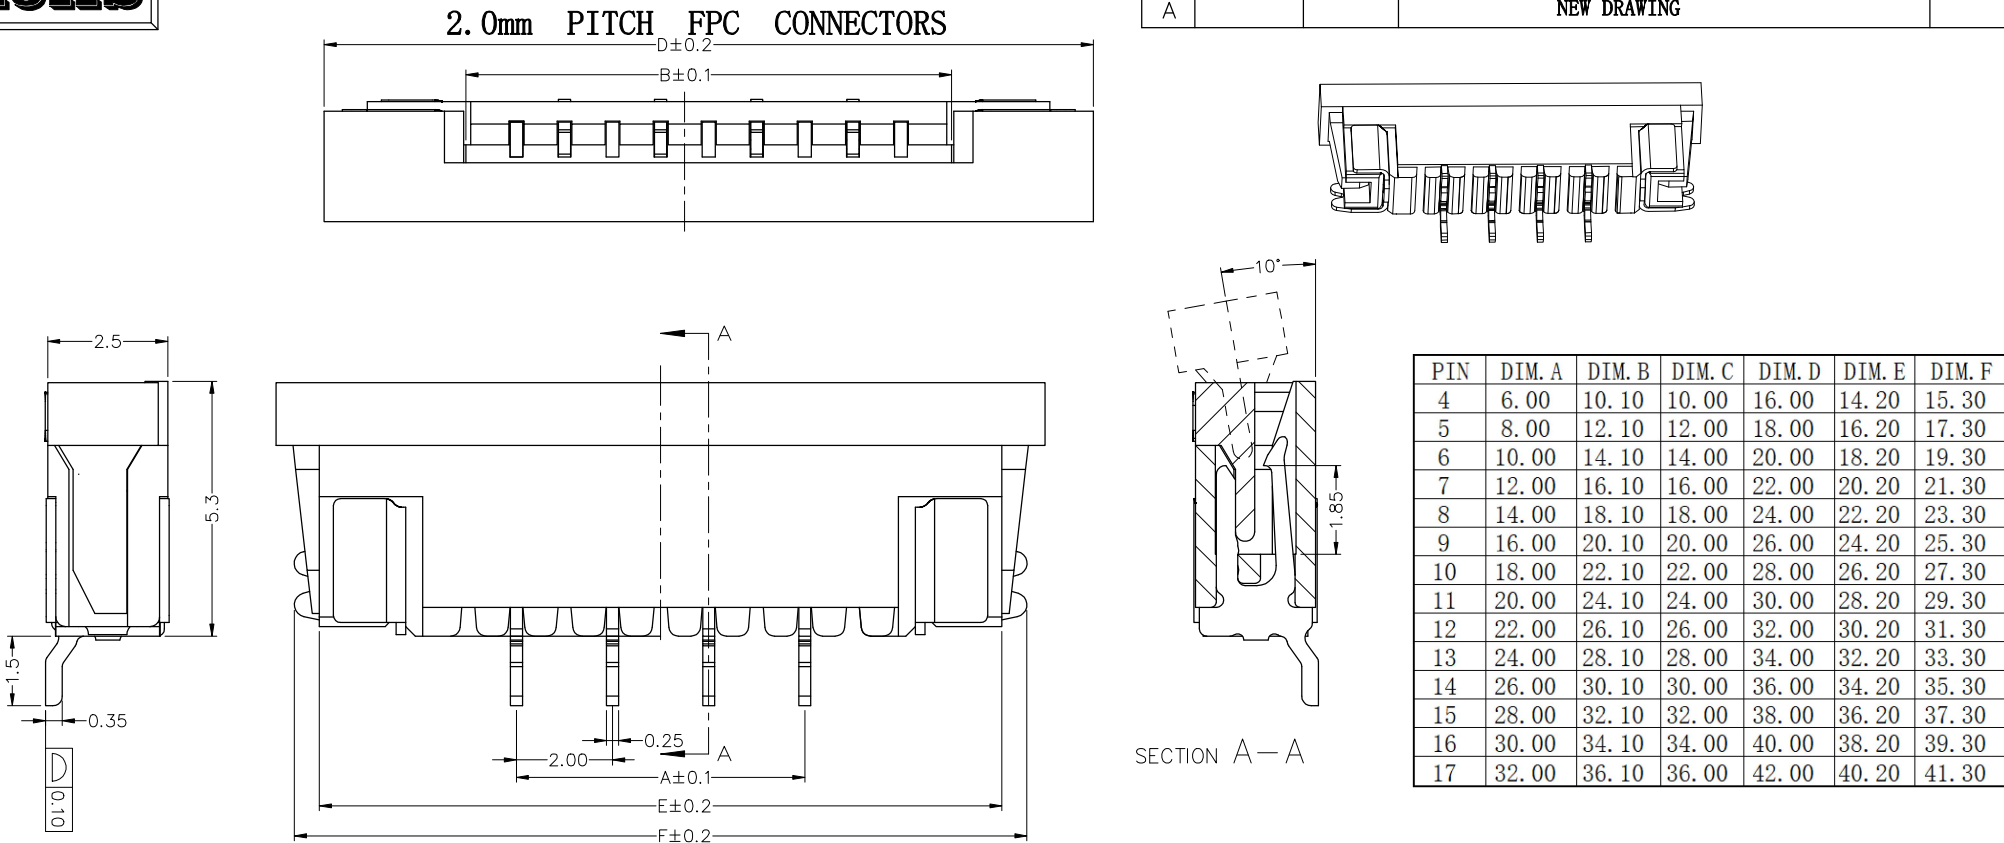


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

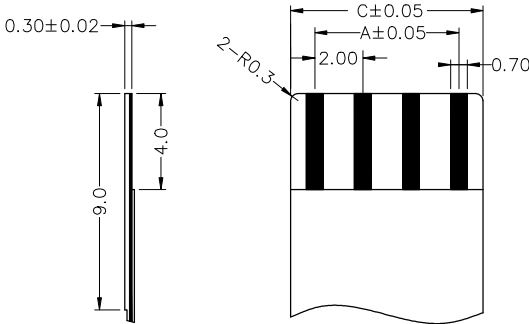

技术要求 (Technical Index):

1. 材质与表面处理 (Material And Finish):
基座 (Housing): LCP UL94V-0 Nature;
盖子 (Cover): LCP UL94V-0 Black;
端子 (Terminal): Phosphor Copper Sn Plated;
焊片 (Solder): Copper Alloy Sn Plated;
2. 工作温度 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC.
4. 额定电流: 0.5A, AC/DC.
5. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
6. 绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$.
7. 耐电压 (Withstanding Voltage): 200V AC/minute.

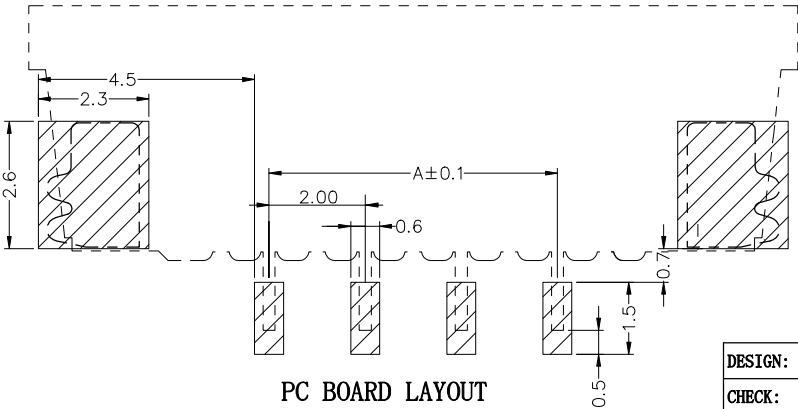

DESIGN:	Xiping Huang				广东国连电子有限公司							
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO.,LTD							
APPROVED:	Youquan Xu			TITLE:								
DIM	TOL	DIM	TOL	2.0mm FPC 半包下接H=2.5mm								
X.	±0.25			PART NO.				2.0K-FX-nPWB-***				
X.X	±0.20										X°	±3.0°
X.XX	±0.15										X.X°	
											X.XX°	
X.XXX											X.XXX°	
				REV.	A	SCALE:	N/A	UNIT:	SHEET:			
								mm	1/1			