


REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

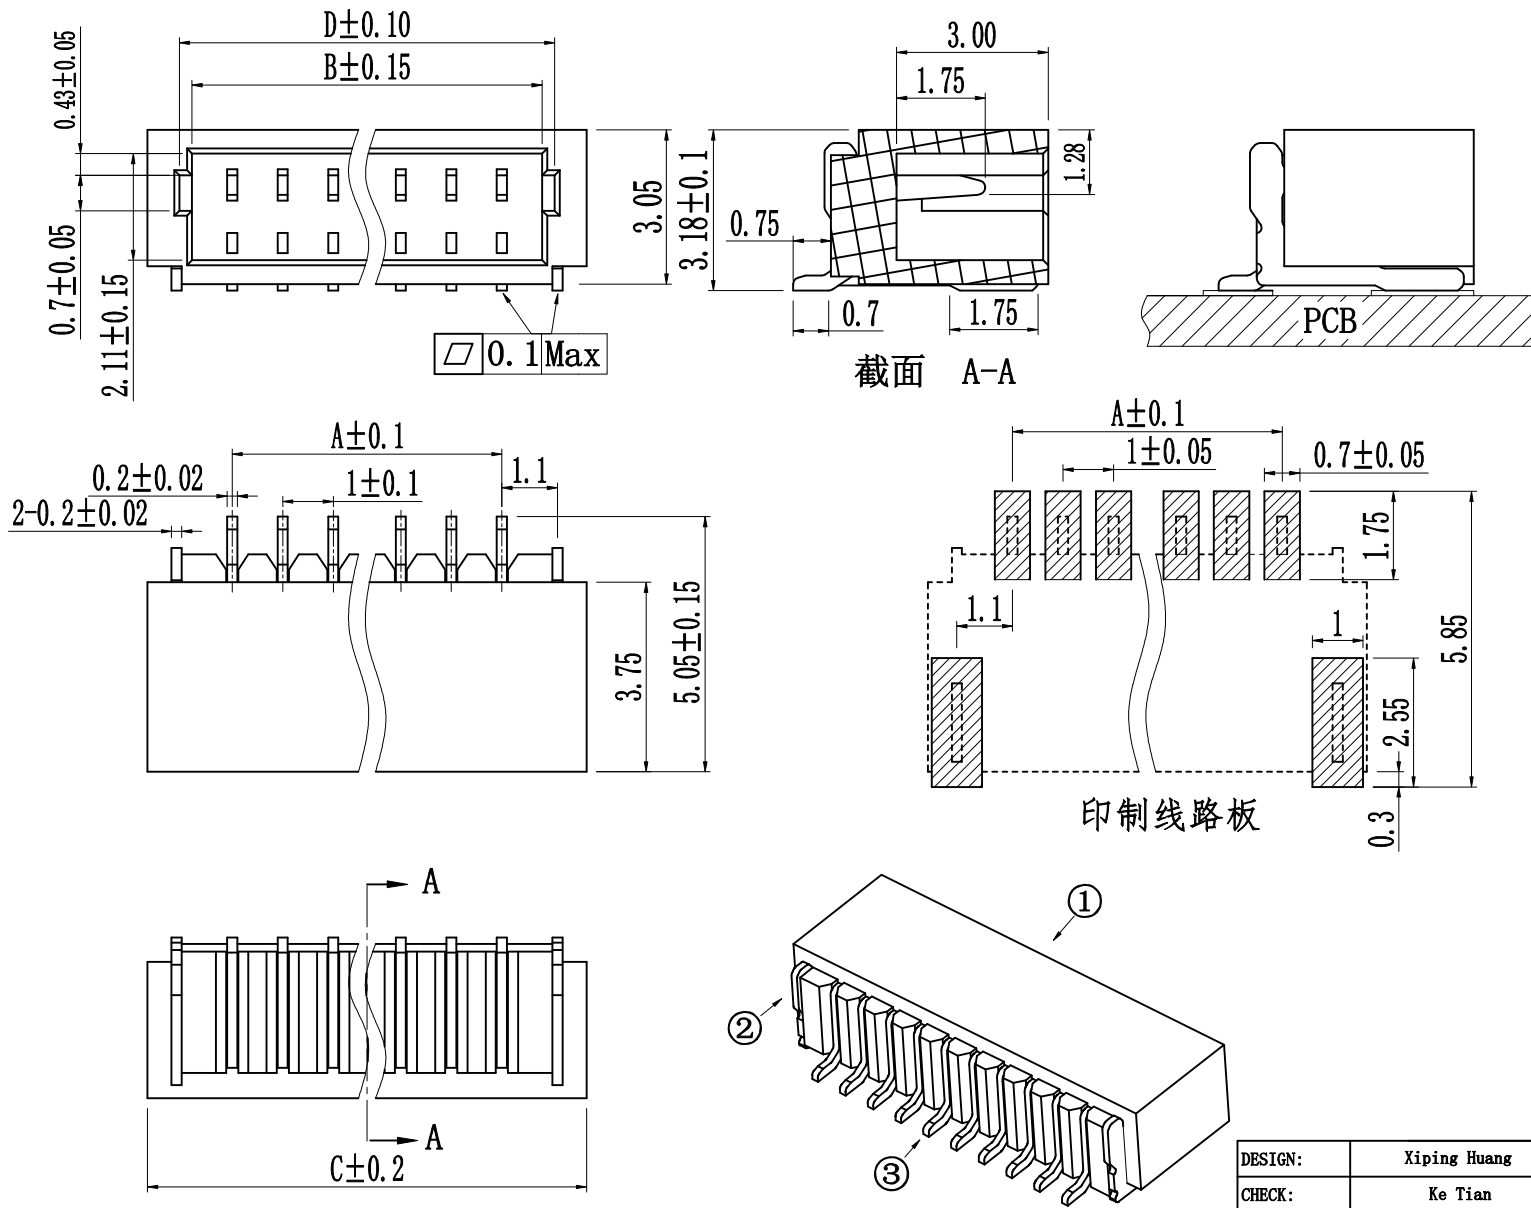

1. 技术参数:
- 1.1 额定电流: 1.0A AC/DC
 - 1.2 额定电压: 50V AC/DC
 - 1.3 耐电压: 500V ACminute
 - 1.4 接触电阻: $20m\Omega$ MAX
 - 1.5 绝缘电阻: $100M\Omega$ MIN
2. 工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.0	2.5	4.3	3.2
3PIN	2.0	3.5	5.3	4.2
4PIN	3.0	4.5	6.3	5.2
5PIN	4.0	5.5	7.3	6.2
6PIN	5.0	6.5	8.3	7.2
7PIN	6.0	7.5	9.3	8.2
8PIN	7.0	8.5	10.3	9.2
9PIN	8.0	9.5	11.3	10.2
10PIN	9.0	10.5	12.3	11.2
11PIN	10.0	11.5	13.3	12.2
12PIN	11.0	12.5	14.3	13.2
13PIN	12.0	13.5	15.3	14.2
14PIN	13.0	14.5	16.3	15.2
15PIN	14.0	15.5	17.3	16.2
16PIN	15.0	16.5	18.3	17.2
17PIN	16.0	17.5	19.3	18.2
18PIN	17.0	18.5	20.3	19.2
19PIN	18.0	19.5	21.3	20.2
20PIN	19.0	20.5	22.3	21.2

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	VicrystR8535	本色
②	焊片	2 PCS	磷铜	亮锡
③	PIN针	2~16 PCS	磷铜	亮锡

DESIGN:	Xiping Huang				广东国连电子有限公司			
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO., LTD			
APPROVED:	Youquan Xu			TITLE:				
DIM	TOL	DIM	TOL	1.0卧贴				
X.	±0.25			PART NO.				
X.X	±0.20	X°	±3.0°	1.0-Q-NPWB				
X.XX	±0.15	X.X°		REV. A				
X.XXX		X.XX°						
		X.XXX°		UNIT: mm				
				SHEET: 1/1				
								