

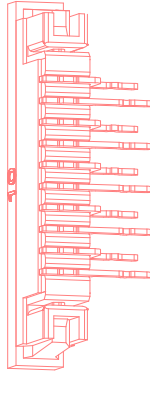
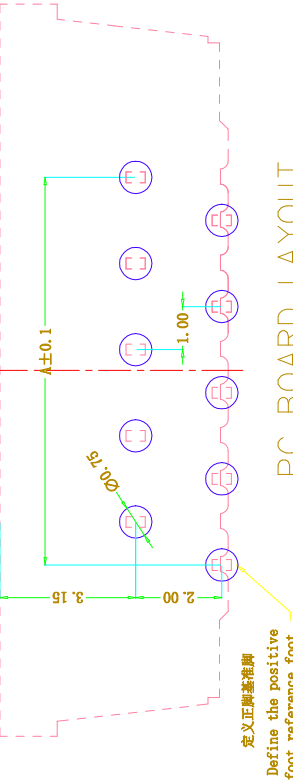


孔位	A	B	C	D
4	3	5.15	9.20	11.10
5	4	6.15	10.20	12.10
7	6	8.15	12.20	14.10
10	9	11.15	15.20	17.10
11	10	12.15	16.20	18.10
12	11	13.15	17.20	19.10
13	12	14.15	18.20	20.10
19	18	20.15	24.20	26.10
21	20	22.15	26.20	28.10
23	22	24.15	28.20	30.10
29	28	30.15	34.20	36.10
31	30	32.15	36.20	38.10
32	31	33.15	37.20	39.10
33	32	34.15	38.20	40.10
34	33	35.15	39.20	41.10
35	34	36.15	40.20	42.10
36	35	37.15	41.20	43.10

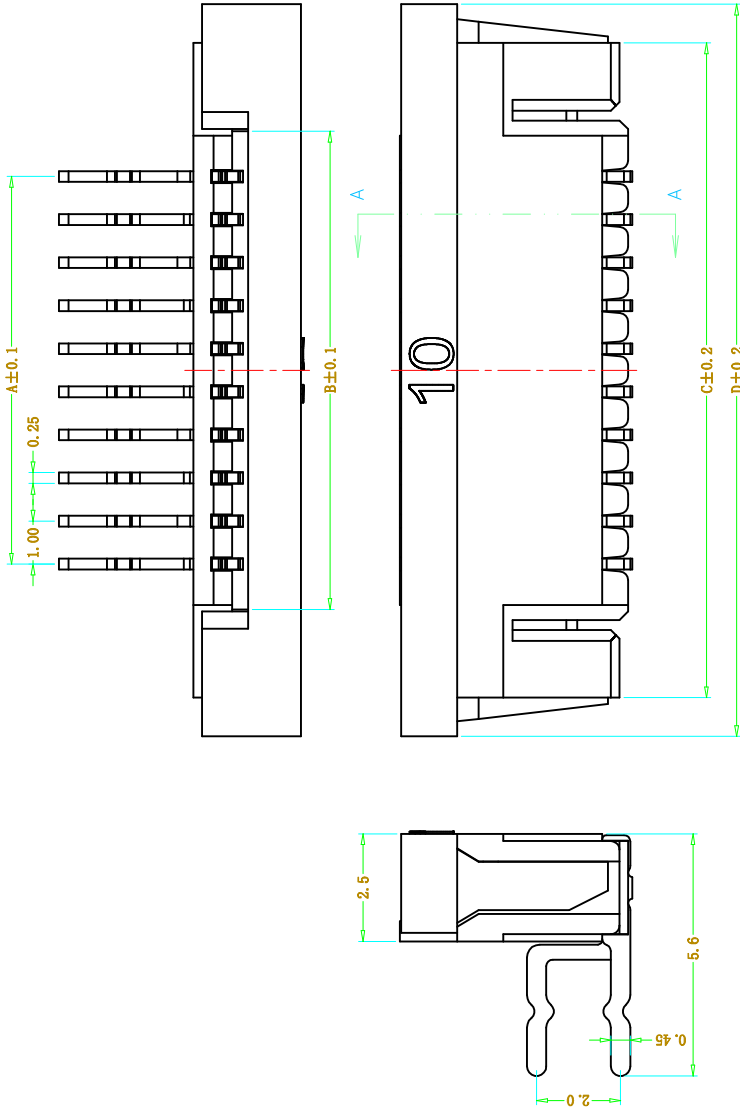

技术要求(Technical Index):

1. 材质与表面处理 (Material And Finish):
基座 (Housing) 和 盖子 (Cover): LCP UL94V-0 Nature Or Black;
端子 (Terminal): Phosphor Copper Au/Sn Plated;
焊片 (Solder): Copper Alloy Au/Sn Plated;
2. 工作温度 (Temperature range): $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC.
4. 额定电流: 0.5A, AC/DC.
5. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
6. 绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$.
7. 耐电压 (Withstanding Voltage): 500V AC/minute.

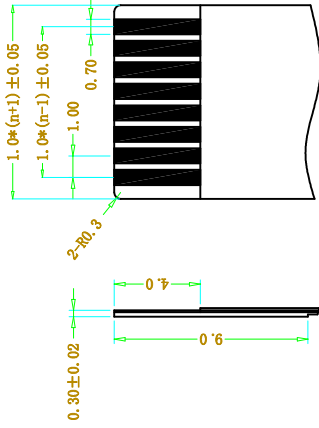

DESIGN:	Xiping Huang		TOLERANCE		PART NO.	1. OK-JBD-10PW-***	SHEET:	1/1
CHECK:	Ke Tian							
APPROVED:	Youquan Xu		TOL	DIM	TOL	1.0mm FPC 弯插式 (正脚)	UNIT:	mm
							SCALE:	N/A
							REV.	A