
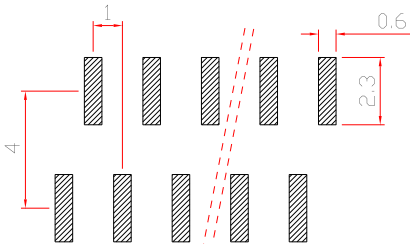
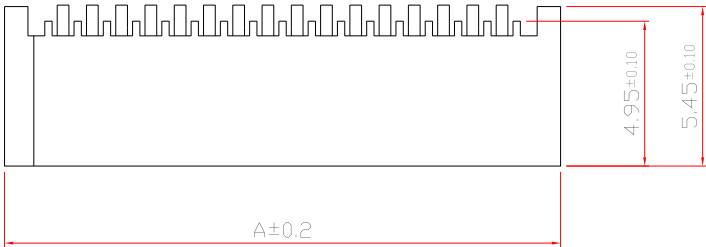



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术要求：
每板间距：1.0mm
额定电压：50V/250V AC、DC
额定电流：0.5A
绝缘电阻：50MΩ MIN
接触电阻：30mΩ MAX
工作温度：-20℃+85℃
线性尺寸的一般公差按±0.2

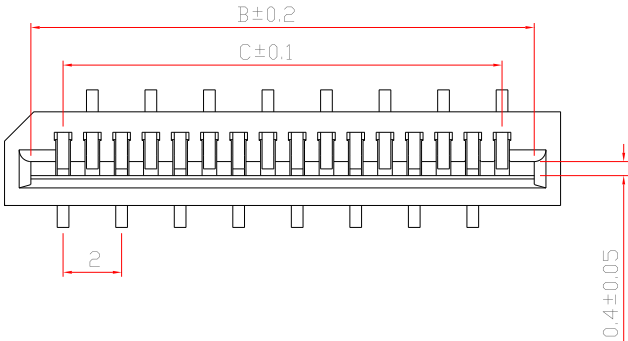

安装尺寸

孔位	A	B	C	孔位	A	B	C
4	7.5	5.15	3	23	26.5	24.15	22
5	8.5	6.15	4	24	27.5	25.15	23
6	9.5	7.15	5	25	28.5	26.15	24
7	10.5	8.15	6	26	29.5	27.15	25
8	11.5	9.15	7	27	30.5	28.15	26
9	12.5	10.15	8	28	31.5	29.15	27
10	13.5	11.15	9	29	32.5	30.15	28
11	14.5	12.15	10	30	33.5	31.15	29
12	15.5	13.15	11	31	34.5	32.15	30
13	16.5	14.15	12	32	35.5	33.15	31
14	17.5	15.15	13	33	36.5	34.15	32
15	18.5	16.15	14	34	37.5	35.15	33
16	19.5	17.15	15	35	38.5	36.15	34
17	20.5	18.15	16	36	39.5	37.15	35
18	21.5	19.15	17	37	40.5	38.15	36
19	22.5	20.15	18	38	41.5	39.15	37
20	23.5	21.15	19	39	42.5	40.15	38
21	24.5	22.15	20	40	43.5	41.15	39
22	25.5	23.15	21				

2	接触件	C+1	磷锡铜
1	塑胶本体	1	LCP-E130
序号		数量	

DESIGN:	Xiping Huang	 广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
CHECK:	Ke Tian				
APPROVED:	Youquan Xu	TITLE: 1.0单面接立贴			
DIM	TOL	DIM	TOL	PART NO. 1.0-A-NPB	
X.	±0.25	X°	±3.0°	REV. A SCALE: N/A UNIT: mm SHEET: 1/1 	
X.X	±0.20	X.X°			
X.XX	±0.15	X.XX°			
X.XXX		X.XXX°			