

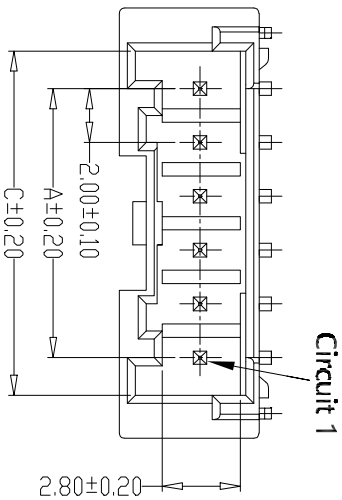
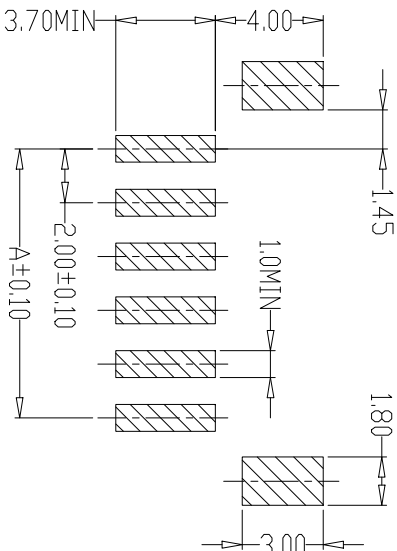


REV	ECN	ND	LOCAS	DESCRIPTION	DATE	DESIGN
A				NEW DRAWING		


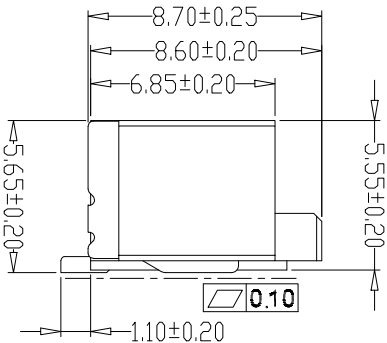


- SPECIFICATIONS**
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltange: 800V AC/minute
 - 7、Material: Wafer PA6T, UL94V-0
- PIN Brass Tin-plated
Solder tab Brass Tin-plated

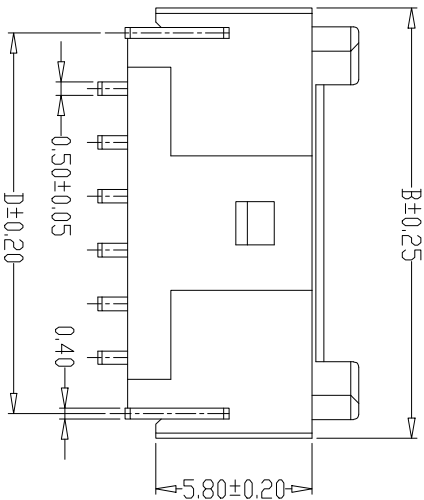

PCB LAYOUT

PIN	尺寸 (mm)			
	A	B	C	D
-02AWB	2.00	8.00	4.60	6.20
-03AWB	4.00	10.00	6.60	8.20
-04AWB	6.00	12.00	8.60	10.20
-05AWB	8.00	14.00	10.60	12.20
-06AWB	10.00	16.00	12.60	14.20
-07AWB	12.00	18.00	14.60	16.20
-08AWB	14.00	20.00	16.60	18.20
-09AWB	16.00	22.00	18.60	20.20
-10AWB	18.00	24.00	20.60	22.20
-11AWB	20.00	26.00	22.60	24.20
-12AWB	22.00	28.00	24.60	26.20
-13AWB	24.00	30.00	26.60	28.20
-14AWB	26.00	32.00	28.60	30.20
-15AWB	28.00	34.00	30.60	32.20
-16AWB	30.00	36.00	32.60	34.20



DESIGN:	Xiping Huang	TITLE:		PART NO.	
CHECK:	Ke Tian				
APPROVED:	Yonguan Xu	PAPER TYPE		A20005-1AWB	
DIM	TOL				
X.	±0.25	X°	±3.0°	REV. A	SCALE: N/A
X.X	±0.20	X.X°		UNIT: mm	SHEET: 1/1
X.XX	±0.15	X.XX°			
X.XXX	X.XXX	X.XXX°			



广东国连电子有限公司
GUANGDONG GUOLIAN ELECTRONICS CO., LTD