


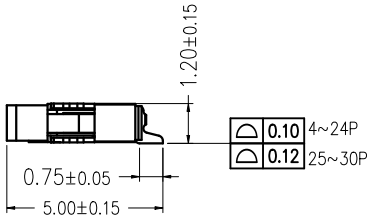
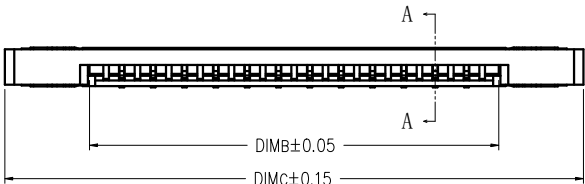
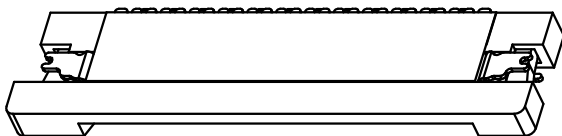


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

序号	品名	材质
①	0.5拉拔胶芯(H1.2)	LCP UL94V-0 本色
②	0.5拉拔下接端(H1.2)	铜合金/表面镀锡
③	0.5拉拔后盖(H1.2)	LCP UL94V-0 黑色
④	0.5拉拔焊片(H1.2)	铜合金/表面镀锡

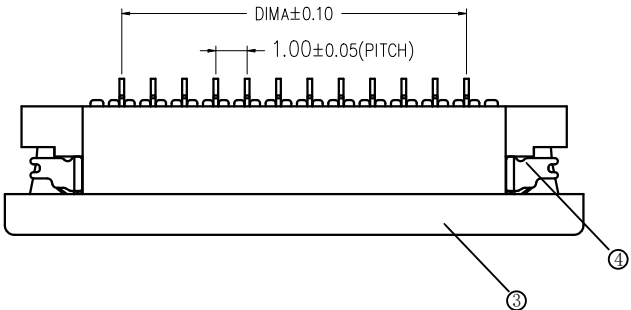


SECTION A-A

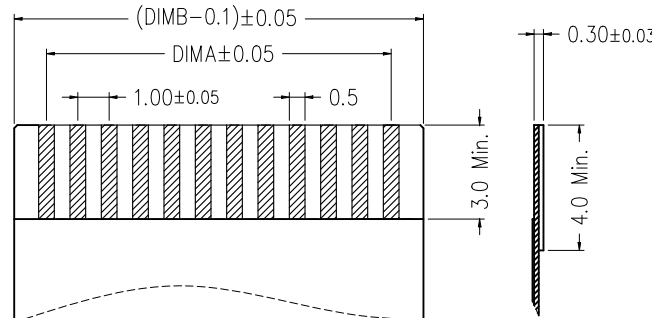

适用扁平线(Applicable Flat Cable)

CKT	DIM A	DIM B	DIM C
4	3.00	5.06	10.46
5	4.00	6.06	11.46
6	5.00	7.06	12.46
7	6.00	8.06	13.46
8	7.00	9.06	14.46
9	8.00	10.06	15.46
10	9.00	11.06	16.46
11	10.00	12.06	17.46
12	11.00	13.06	18.46
13	12.00	14.06	19.46
14	13.00	15.06	20.46
15	14.00	16.06	21.46
16	15.00	17.06	22.46
17	16.00	18.06	23.46
18	17.00	19.06	24.46
19	18.00	20.06	25.46
20	19.00	21.06	26.46
21	20.00	22.06	27.46
22	21.00	23.06	28.46
23	22.00	24.06	29.46
24	23.00	25.06	30.46
25	24.00	26.06	31.46
26	25.00	27.06	32.46
27	26.00	28.06	33.46
28	27.00	29.06	34.46
29	28.00	30.06	35.46
30	29.00	31.06	36.46

- Ω.
Ω
- 技术指标:
- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 - 温度范围: -25° C~85° C.
 - 额定电压: 50V, AC/DC(等效).
 - 接触电阻: ≤0.03
 - 绝缘电阻: ≥500M

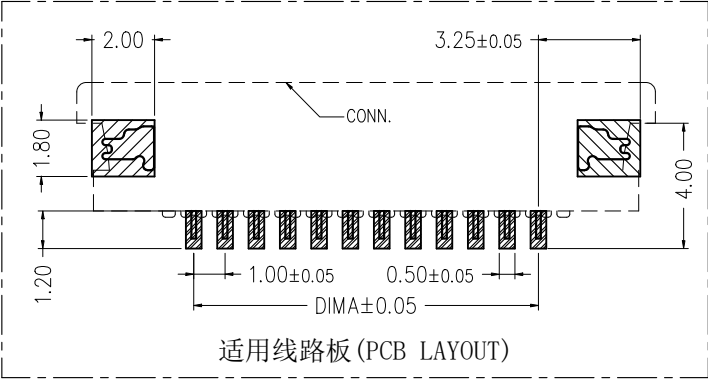

适用线路板(PCB LAYOUT)

DESIGN:	Xiping Huang	 广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD	
CHECK:	Ke Tian		
APPROVED:	Youquan Xu	TITLE: 1.0抽拉下接H1.2	
DIM	TOL	DIM	TOL
X.	±0.25	X°.	±3.0°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX		X.XXX°	
		PART NO.	1012-NRU-SN
REV.	A	SCALE:	N/A
		UNIT:	mm
		SHEET:	1/1