
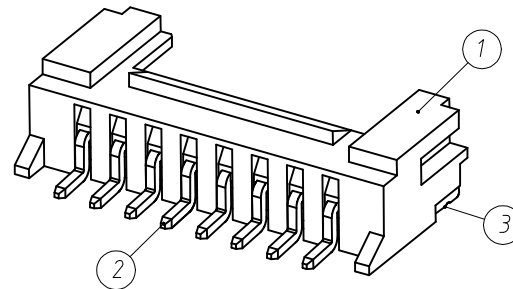






REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

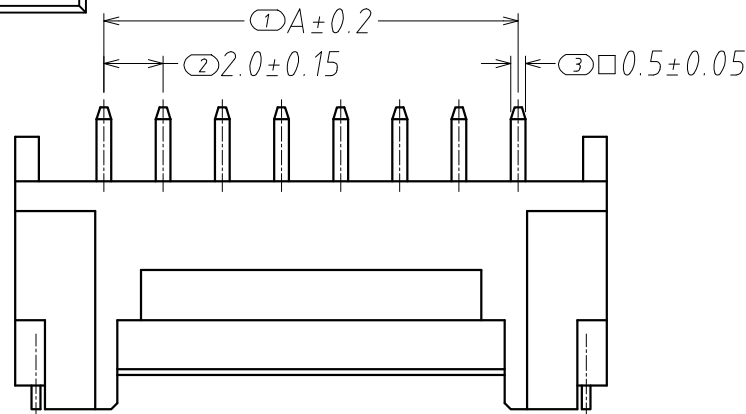


- 技术参数:
- 1、所有材料符合ROHS2.0/REACH/HF要求。
 - 2、额定电流: 2A, AC, DC;
 - 3、额定电压: 250V, AC, DC;
 - 4、温度范围: -25℃~+85℃;
 - 5、接触电阻: ≤0.03Ω;
 - 6、绝缘电阻: ≥1000MΩ;
 - 7、耐压: 1000V, AC/minute.
 - 8、产品料号:

A20002 - n AWB - D - 03 T1

孔位 ————— 电镀
产品类型 ————— T1: 镀亮锡
AWB: 卧贴针座 ————— 胶芯材质
特征 ————— 03: LCP 本色
D: 有定位片

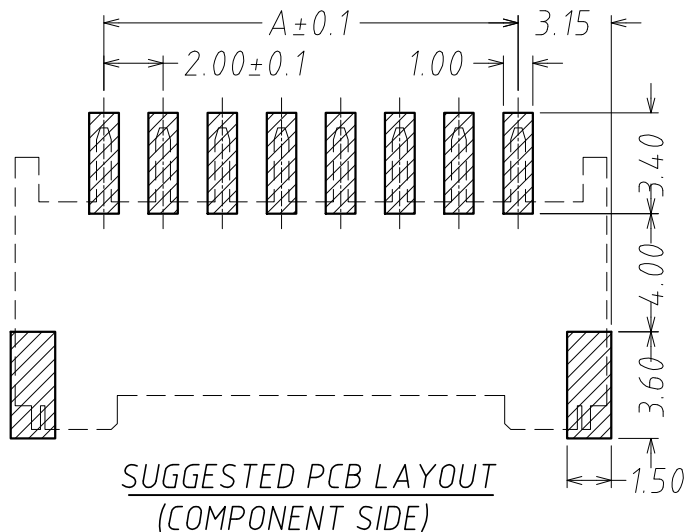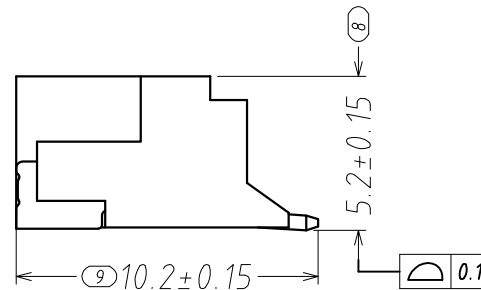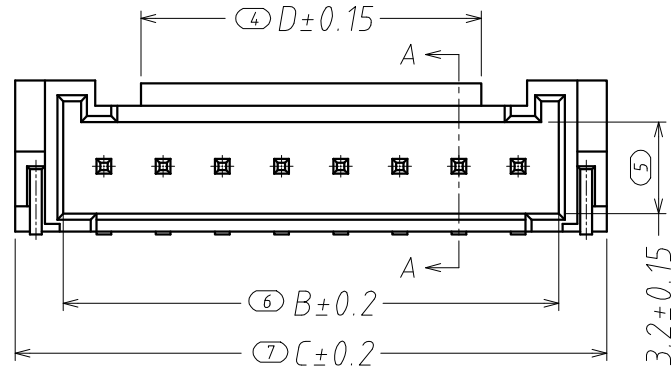

SECTION A-A



2P外观

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.00	4.80	8.00	2.45
03	4.00	6.80	10.00	3.00
04	6.00	8.80	12.00	5.00
05	8.00	10.80	14.00	7.00
06	10.00	12.80	16.00	9.00
07	12.00	14.80	18.00	11.00
08	14.00	16.80	20.00	13.00
09	16.00	18.80	22.00	15.00
10	18.00	20.80	24.00	17.00
11	20.00	22.80	26.00	19.00
12	22.00	24.80	28.00	21.00
13	24.00	26.80	30.00	23.00
...	...	...	...	...
16	30.00	32.80	36.00	29.00

3	焊片 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN.
2	端子 Contact	黄铜 Brass	n#1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

DESIGN:	Xiping Huang				广东国连电子有限公司			
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:	Youquan Xu				TITLE: HY2.0卧贴			
DIM	TOL	DIM	TOL		PART NO. A20002-nAWB-D-03T1			
X.	±0.25							
X.X	±0.20	X°	±3.0°	REV. A SCALE: N/A UNIT: mm SHEET: 1/1 				
X.XX	±0.15	X.X°						
X.XXX		X.XX°						