



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

序号	品名	材质
①	1.0无盖卧式下接胶芯 (H=3.0)	LCP UL94V-0 自然色
②	1.0无盖卧式下接端子 (H=3.0)	铜合金/表面镀锡
③	1.0无盖卧式焊片 (H=3.0)	铜合金/表面镀锡


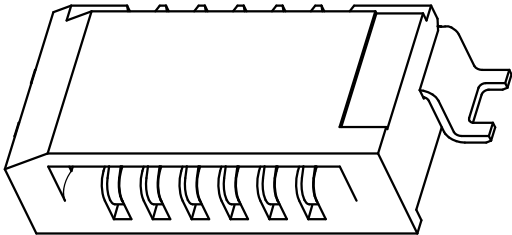


CKT	DIM A	DIM B	DIM C	DIM D
3	2.0	4.10	6.8	9.2
4	3.0	5.10	7.8	10.2
5	4.0	6.10	8.8	11.2
6	5.0	7.10	9.8	12.2
7	6.0	8.10	10.8	13.2
8	7.0	9.10	11.8	14.2
9	8.0	10.10	12.8	15.2
10	9.0	11.10	13.8	16.2
11	10.0	12.10	14.8	17.2
12	11.0	13.10	15.8	18.2
13	12.0	14.10	16.8	19.2
14	13.0	15.10	17.8	20.2
15	14.0	16.10	18.8	21.2
16	15.0	17.10	19.8	22.2
17	16.0	18.10	20.8	23.2
18	17.0	19.10	21.8	24.2
19	18.0	20.10	22.8	25.2
20	19.0	21.10	23.8	26.2
21	20.0	22.10	24.8	27.2
22	21.0	23.10	25.8	28.2
23	22.0	24.10	26.8	29.2
24	23.0	25.10	27.8	30.2
25	24.0	26.10	28.8	31.2
26	25.0	27.10	29.8	32.2
27	26.0	28.10	30.8	33.2
28	27.0	29.10	31.8	34.2
29	28.0	30.10	32.8	35.2
30	29.0	31.10	33.8	36.2




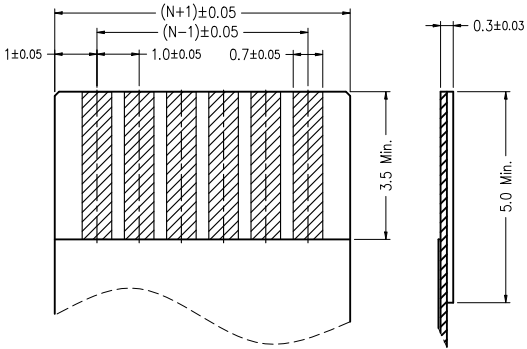


Applicable Flat Cable

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu		TITLE:				
DIM	TOL	DIM	TOL	1.0单面接卧贴H3.0				
X.	±0.25			PART NO.				
X. X	±0.20	X° .	±3.0°	1.0-A-NPWB				
X. XX	±0.15	X. X°		REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1	
X. XXX		X. XX°						
		X. XXX°						

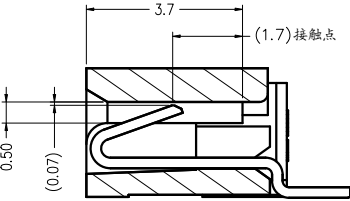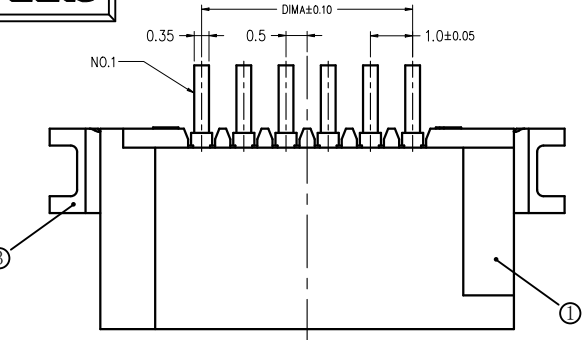

SECTION A-A

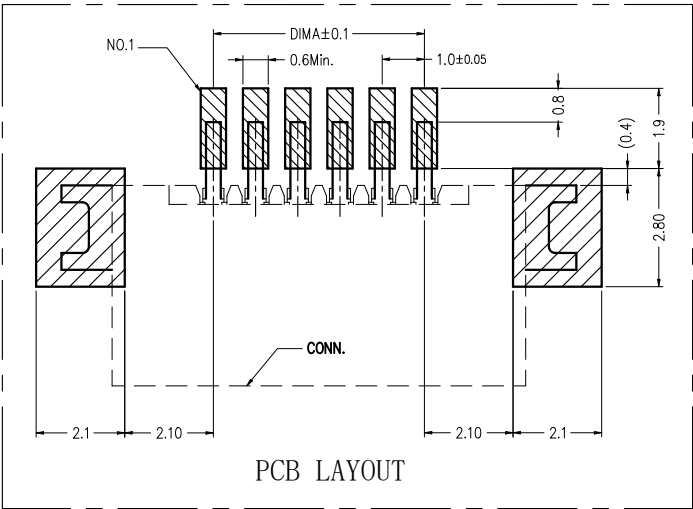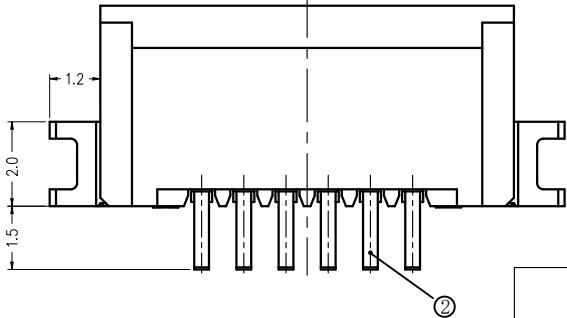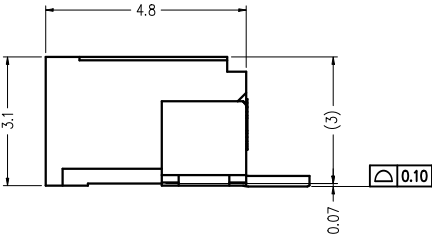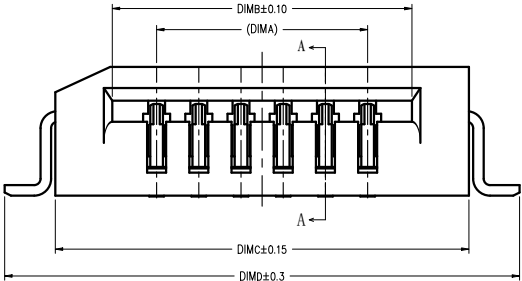

PCB LAYOUT

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
 2. 温度范围: -40° C~+85° C.
 3. 额定电压: 50V, AC(per pin)/DC.
 4. 接触电阻: ≤55mΩ.
 5. 绝缘电阻: ≥500MΩ