
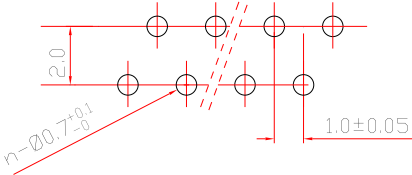
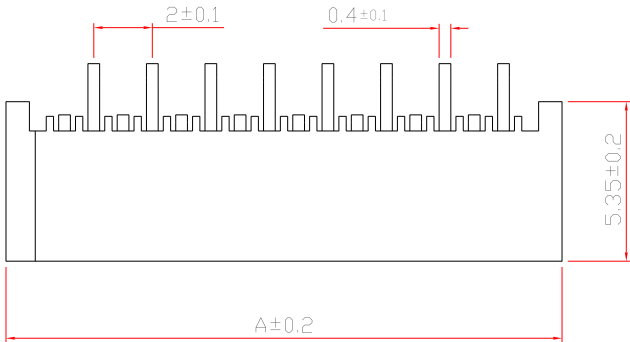



| REV. | ECN NO. | LOCAS. | DESCRIPTION | DATE | DESIGN |
|------|---------|--------|-------------|------|--------|
| A    |         |        | NEW DRAWING |      |        |

技术要求:  
每板间距: 1.0mm  
额定电压: 50V/250V AC、DC  
额定电流: 0.5A  
绝缘电阻: 50MΩ MIN  
接触电阻: 30mΩ MAX  
工作温度: -20℃+85℃  
线性尺寸的一般公差按±0.2

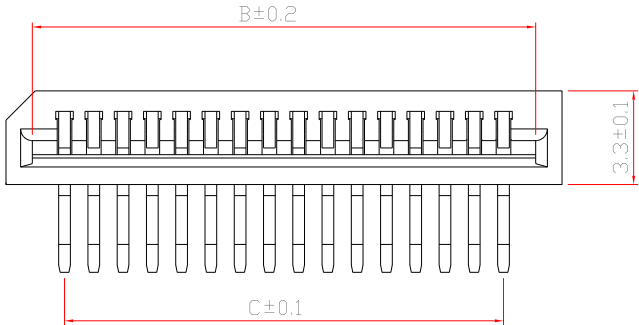

安装尺寸

| 孔位 | A    | B     | C  | 孔位 | A    | B     | C  |
|----|------|-------|----|----|------|-------|----|
| 4  | 7.5  | 5.15  | 3  | 23 | 26.5 | 24.15 | 22 |
| 5  | 8.5  | 6.15  | 4  | 24 | 27.5 | 25.15 | 23 |
| 6  | 9.5  | 7.15  | 5  | 25 | 28.5 | 26.15 | 24 |
| 7  | 10.5 | 8.15  | 6  | 26 | 29.5 | 27.15 | 25 |
| 8  | 11.5 | 9.15  | 7  | 27 | 30.5 | 28.15 | 26 |
| 9  | 12.5 | 10.15 | 8  | 28 | 31.5 | 29.15 | 27 |
| 10 | 13.5 | 11.15 | 9  | 29 | 32.5 | 30.15 | 28 |
| 11 | 14.5 | 12.15 | 10 | 30 | 33.5 | 31.15 | 29 |
| 12 | 15.5 | 13.15 | 11 | 31 | 34.5 | 32.15 | 30 |
| 13 | 16.5 | 14.15 | 12 | 32 | 35.5 | 33.15 | 31 |
| 14 | 17.5 | 15.15 | 13 | 33 | 36.5 | 34.15 | 32 |
| 15 | 18.5 | 16.15 | 14 | 34 | 37.5 | 35.15 | 33 |
| 16 | 19.5 | 17.15 | 15 | 35 | 38.5 | 36.15 | 34 |
| 17 | 20.5 | 18.15 | 16 | 36 | 39.5 | 37.15 | 35 |
| 18 | 21.5 | 19.15 | 17 | 37 | 40.5 | 38.15 | 36 |
| 19 | 22.5 | 20.15 | 18 | 38 | 41.5 | 39.15 | 37 |
| 20 | 23.5 | 21.15 | 19 | 39 | 42.5 | 40.15 | 38 |
| 21 | 24.5 | 22.15 | 20 | 40 | 43.5 | 41.15 | 39 |
| 22 | 25.5 | 23.15 | 21 |    |      |       |    |

|    |      |     |        |
|----|------|-----|--------|
| 2  | 接触件  | C+1 | 磷锡铜    |
| 1  | 塑胶本体 | 1   | 杜邦FR50 |
| 序号 |      | 数量  |        |

|           |              |                                                                                                                                           |       |                                                                                                                                      |  |
|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------|--|
| DESIGN:   | Xiping Huang |  广东国连电子有限公司<br>GUANGDONG GUOLIAN ELECTRONICS CO.,LTD |       |                                                                                                                                      |  |
| CHECK:    | Ke Tian      |                                                                                                                                           |       |                                                                                                                                      |  |
| APPROVED: | Youquan Xu   | TITLE: 1.0单面接弯插                                                                                                                           |       |                                                                                                                                      |  |
| DIM       | TOL          | DIM                                                                                                                                       | TOL   | PART NO. 1.0-A-NPW                                                                                                                   |  |
| X.        | ±0.25        | X°.                                                                                                                                       | ±3.0° | REV. A    SCALE: N/A    UNIT: mm    SHEET: 1/1  |  |
| X.X       | ±0.20        | X.X°                                                                                                                                      |       |                                                                                                                                      |  |
| X.XX      | ±0.15        | X.XX°                                                                                                                                     |       |                                                                                                                                      |  |
| X.XXX     |              | X.XXX°                                                                                                                                    |       |                                                                                                                                      |  |