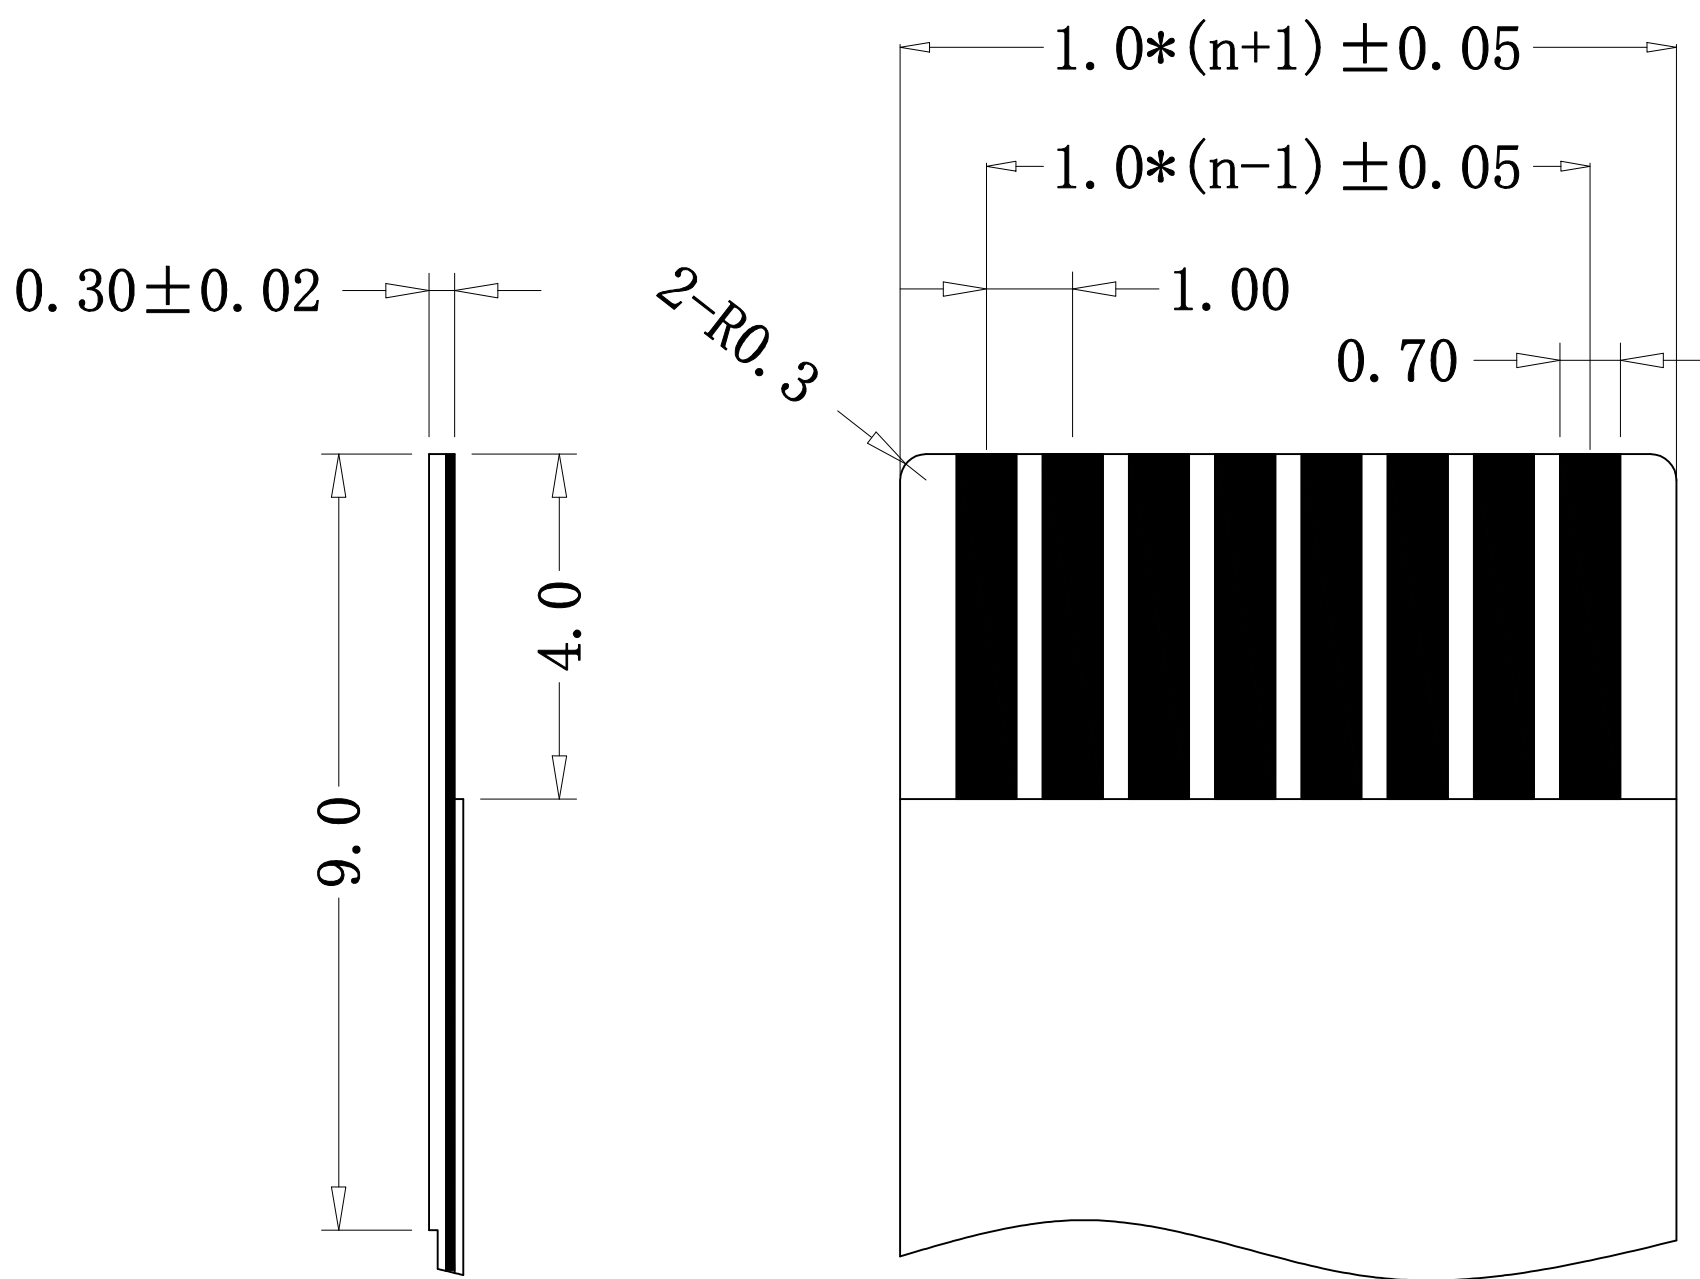
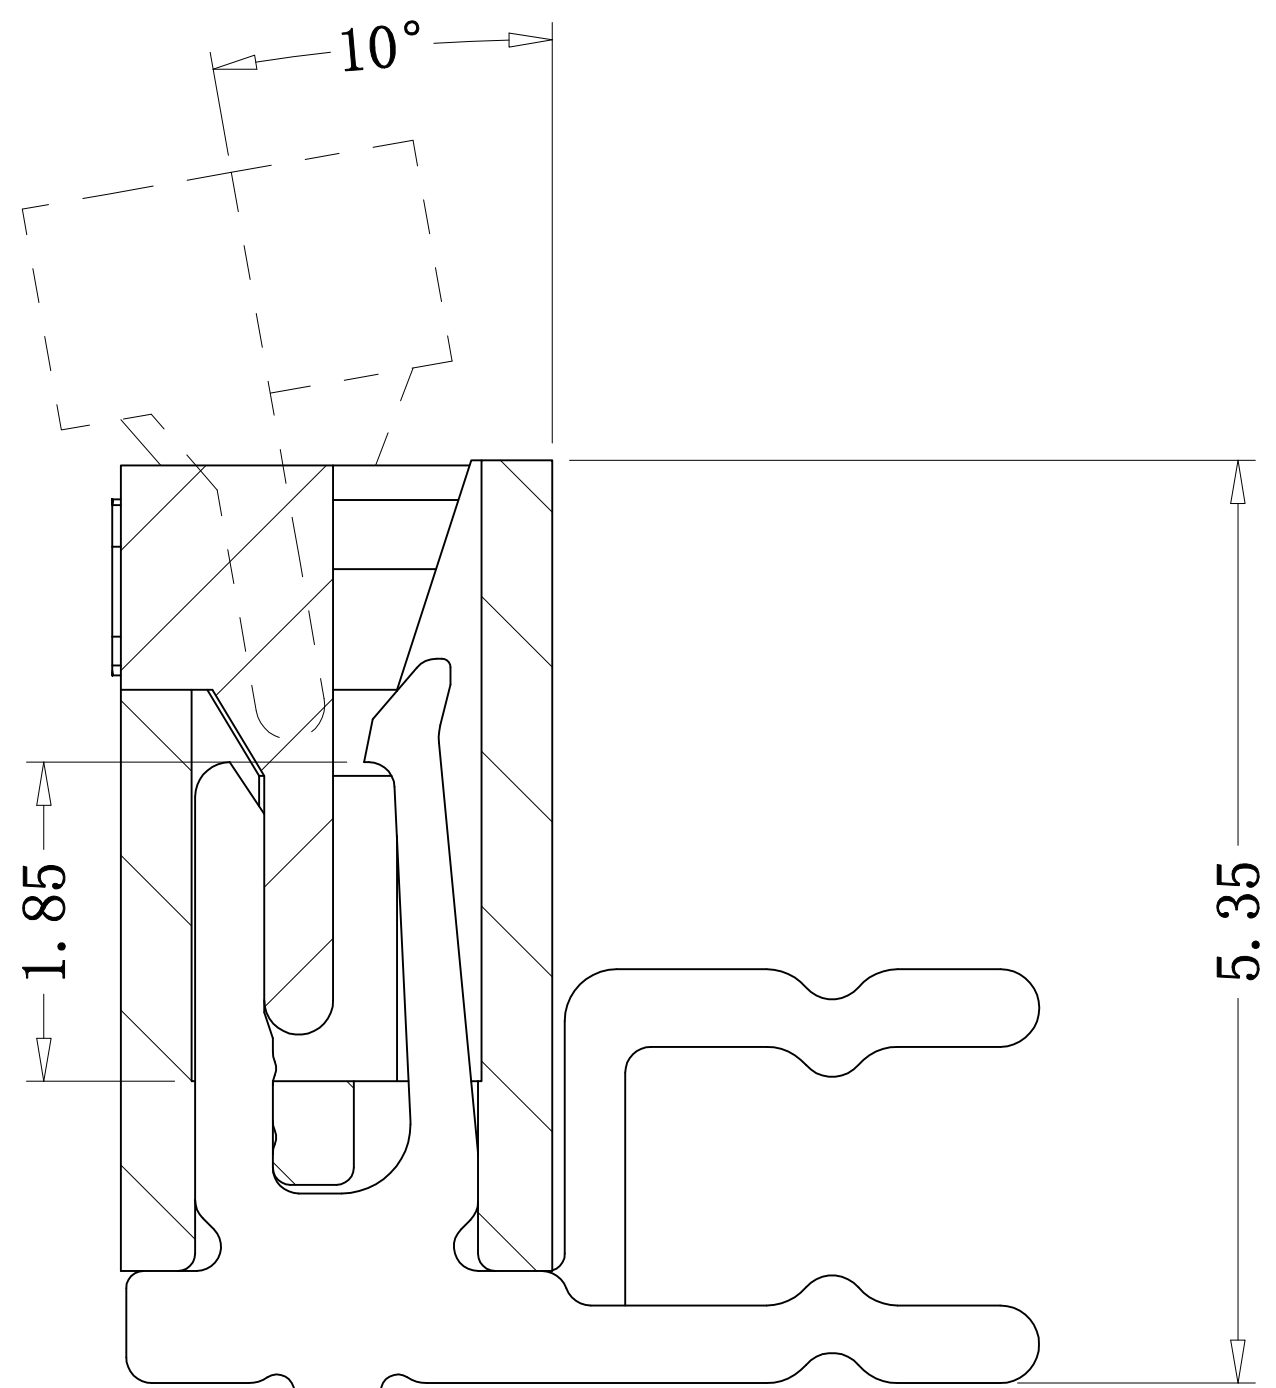
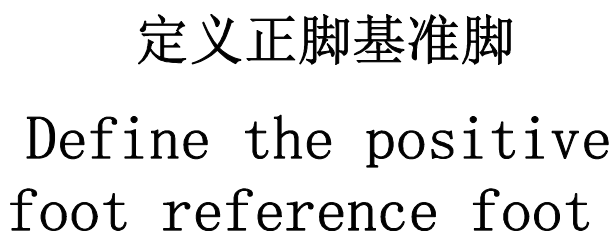
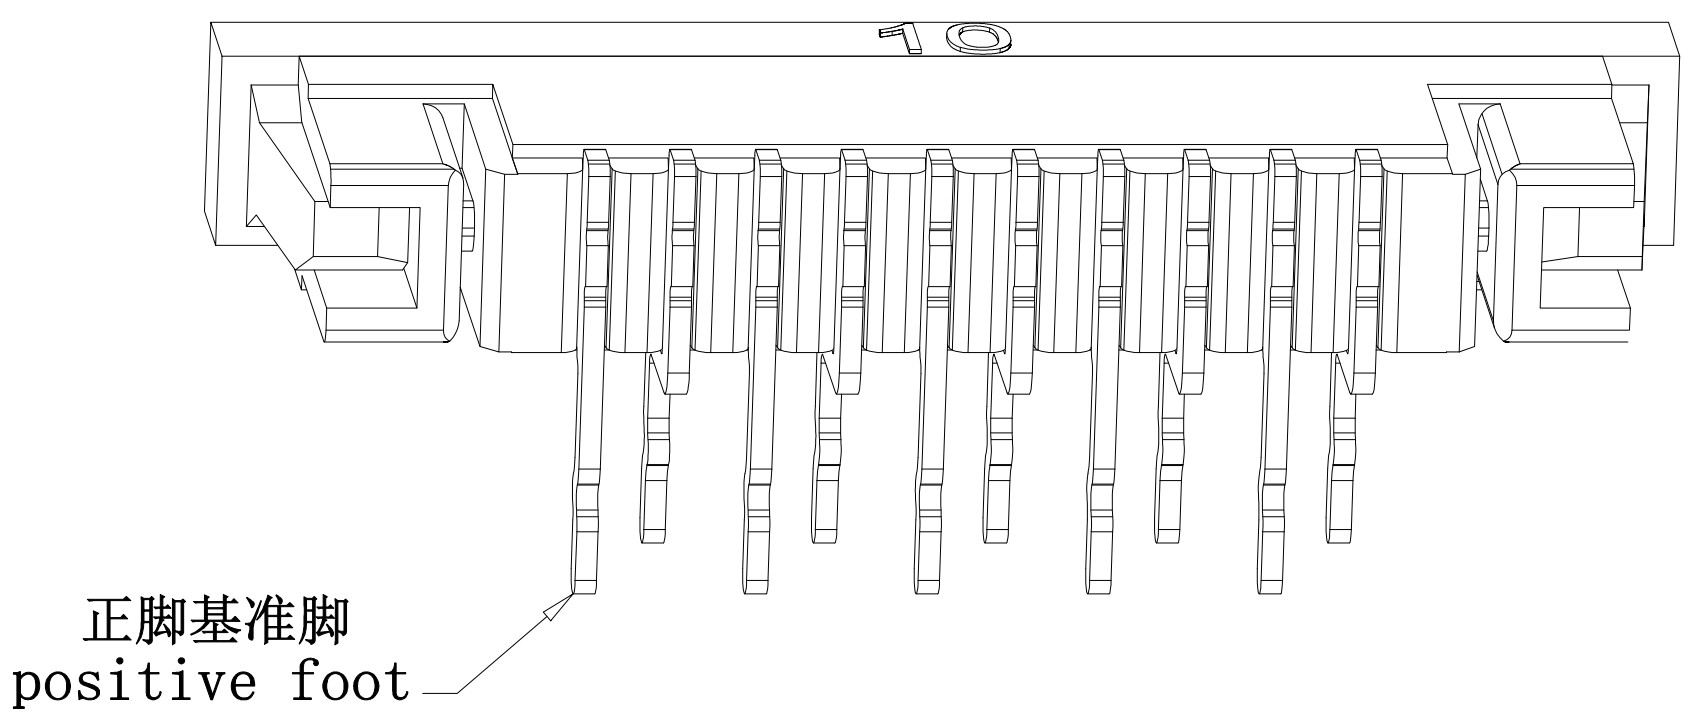


AB

技术要求(Technical Index):

1. 材质与表面处理(Material And Finish):
基座 (Housing) and 盖子 (Cover): LCP UL94V-0 Nature Or Black;
端子 (Terminal) :Phosphor Copper Au/Sn Plated;
焊片 (Solder) : Copper Alloy Au/Sn Plated;
2. 工作温度(Temperature range): -20° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC.
4. 额定电流: 0.5A, AC/DC.
5. 接触电阻(Contact resistance): $\leq 20\text{m}\Omega$.
6. 绝缘电阻(Insulation resistance): $\geq 800\text{M}\Omega$.
7. 耐电压(Withstanding Voltage): 500V AC/minute.

II