

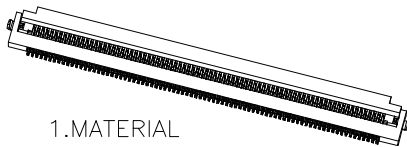


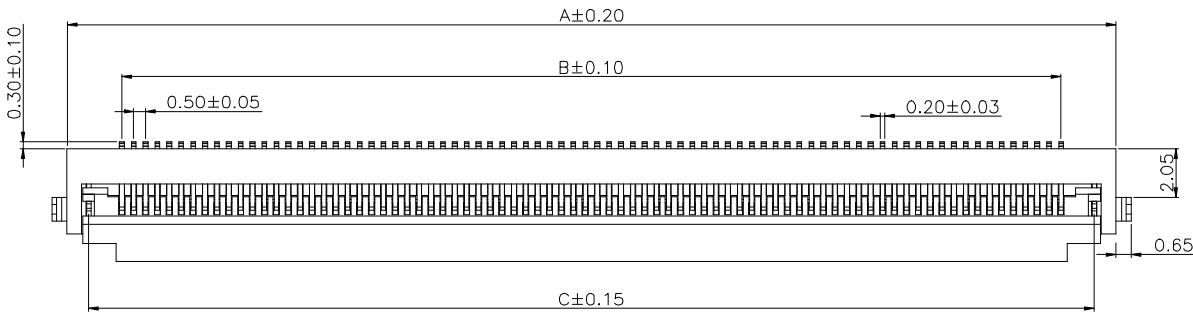



REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

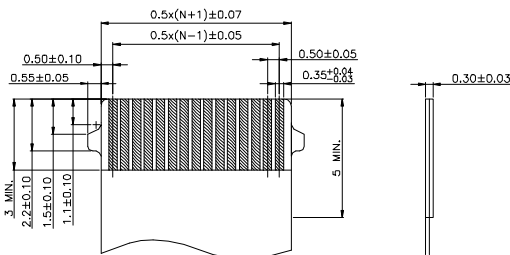


- 1.MATERIAL
HOUSING:LCP UL 94V-0
ACTUATOR:LCP UL 94V-0
CONTACTS:PHOSPHOR BRONZE
PEG: BRASS
- 2.PLATING:
CONTACTS:GOLD FLASH OVER NICKEL
PEG:TIN OVER NICKEL NI:50''~60U''
SN:100U''~120U''
- 3.PART NO:
OPERATING VOLTAGE:50V AC,DC
CURRENT RATING:0.5A AC,DC
OPERATING TEMPERATURE:-25C~+85C

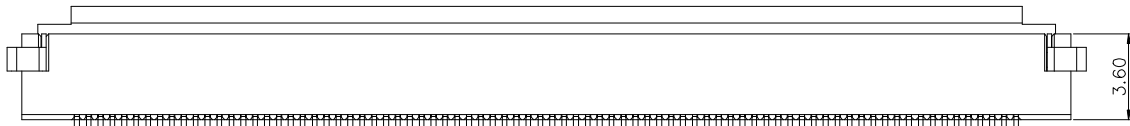

RECOMMENDED FFC DIM

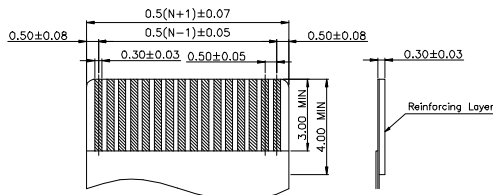

RECOMMENDED FFC DIM

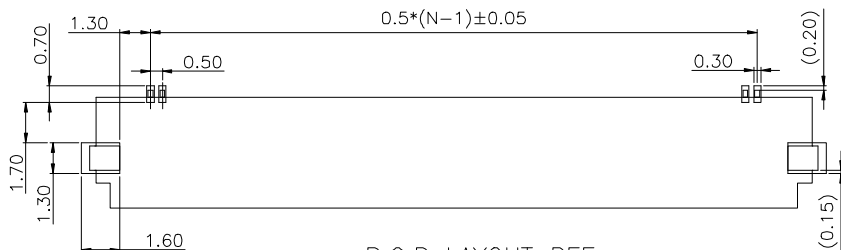

P.C.B LAYOUT REF

No. of Contacts	DIM.			
	A	B	C	D
24	16.10	11.50	14.30	12.60
30	19.10	14.50	17.30	15.60
40	24.10	19.50	22.30	20.60
50	29.10	24.50	27.30	25.60
55	31.60	27.00	29.80	28.10
56	32.10	27.50	30.30	28.60
60	34.10	29.50	32.30	30.60
64	36.10	31.50	34.30	32.60
65	36.60	32.00	34.80	33.10
66	37.10	32.50	35.30	33.60
68	38.10	33.50	35.80	34.10
70	39.10	34.50	36.80	35.10
80	44.10	39.50	42.30	40.60
96	52.10	47.50	50.30	48.60

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu			TITLE:			
DIM	TOL	DIM	TOL	0.5翻盖带扣H1.8				
X.	±0.25			PART NO.				
X. X	±0.20			0518-NCL-GF-***				
X. XX	±0.15			REV. A				
X. XXX				SCALE: N/A				
				UNIT:	SHEET:			
				mm	1/1			