

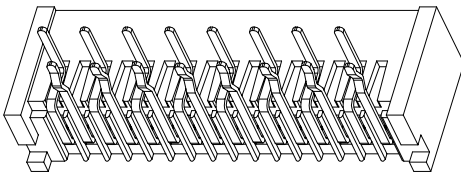
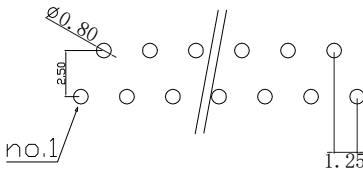


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		




NO.1 端子Contact




底座Housing

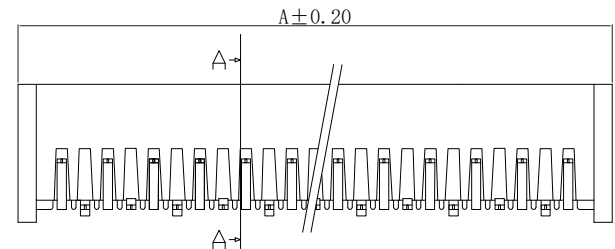

PCB LAYOUT

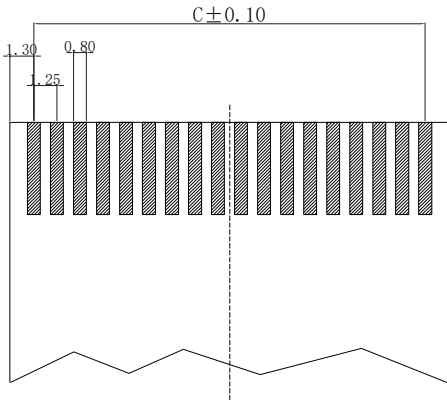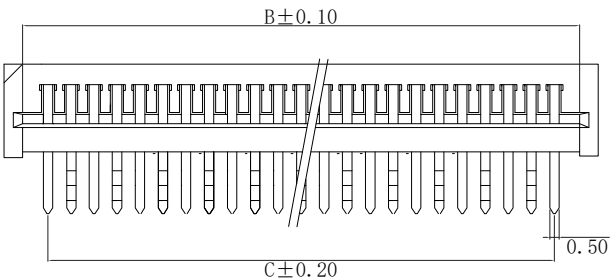

适用电缆(proper cable)
(δ=0.3±0.02mm)



规格尺寸

孔位	A	B	C
3P	7.30	5.10	2.50
4P	8.55	6.35	3.75
5P	9.80	7.60	5.00
6P	11.05	8.85	6.25
7P	12.30	10.10	7.50
8P	13.55	11.35	8.75
9P	14.80	12.60	10.00
10P	16.05	13.85	11.25
11P	17.30	15.10	12.50
12P	18.55	16.35	13.75
13P	19.80	17.60	15.00
14P	21.05	18.85	16.25
15P	22.30	20.10	17.50
16P	23.55	21.35	18.75
17P	24.80	22.60	20.00
18P	26.05	23.85	21.25
19P	27.30	25.10	22.50
20P	28.55	26.35	23.75
21P	29.80	27.60	25.00
22P	31.05	28.85	26.25
23P	32.30	30.10	27.50
24P	33.55	31.35	28.75
25P	34.80	32.60	30.00
26P	36.05	33.85	31.25
27P	37.30	35.10	32.50
28P	38.55	36.35	33.75
29P	39.80	37.60	35.00
30P	41.05	38.85	36.25
31P	42.30	40.10	37.50
32P	43.55	41.35	38.75
33P	44.80	42.60	40.00
34P	46.05	43.85	41.25
35P	47.30	45.10	42.50
36P	48.55	46.35	43.75
37P	49.80	47.60	45.00
38P	51.05	48.85	46.25
39P	52.30	50.10	47.50
40P	53.55	51.35	48.75

技术参数 SPECIFICATIONS

间距 (Pitch) : 1.25
极数 (Poles) :3~40
额定电压 (Voltage rating):50V DC/AC
额定电流 (Current rating) :0.5A DC/AC
耐压值 (Withstand Voltage) :500VAC/m
工作温度 (Working Temperature) :
-25℃~+85℃
绝缘电阻 (Insulation Resistance) :≥500MΩ
接触电阻 (Contact resistance) :≤30mΩ

材料 Material

接触件 (Contact) : 磷青铜 镀亮锡(镍Ni30~80u", 锡Sn80~200u")
t=0.25mm Phosphor Bronze Tin-plated
塑胶主体 (Housing) : PA (UL94V-0) Heat resistance plastic
PA66(UL94V-0)

DESIGN:	Xiping Huang		
CHECK:	Ke Tian		
APPROVED:	Youquan Xu		
DIM	TOL	DIM	TOL
X.	±0.25	X°	±3.0°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX		X.XXX°	

		广东国连电子有限公司	
		GUANGDONG GUOLIAN ELECTRONICS CO.,LTD	
TITLE:		1.25单面接弯插	
PART NO.		1.25-A-NPW	
REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1