


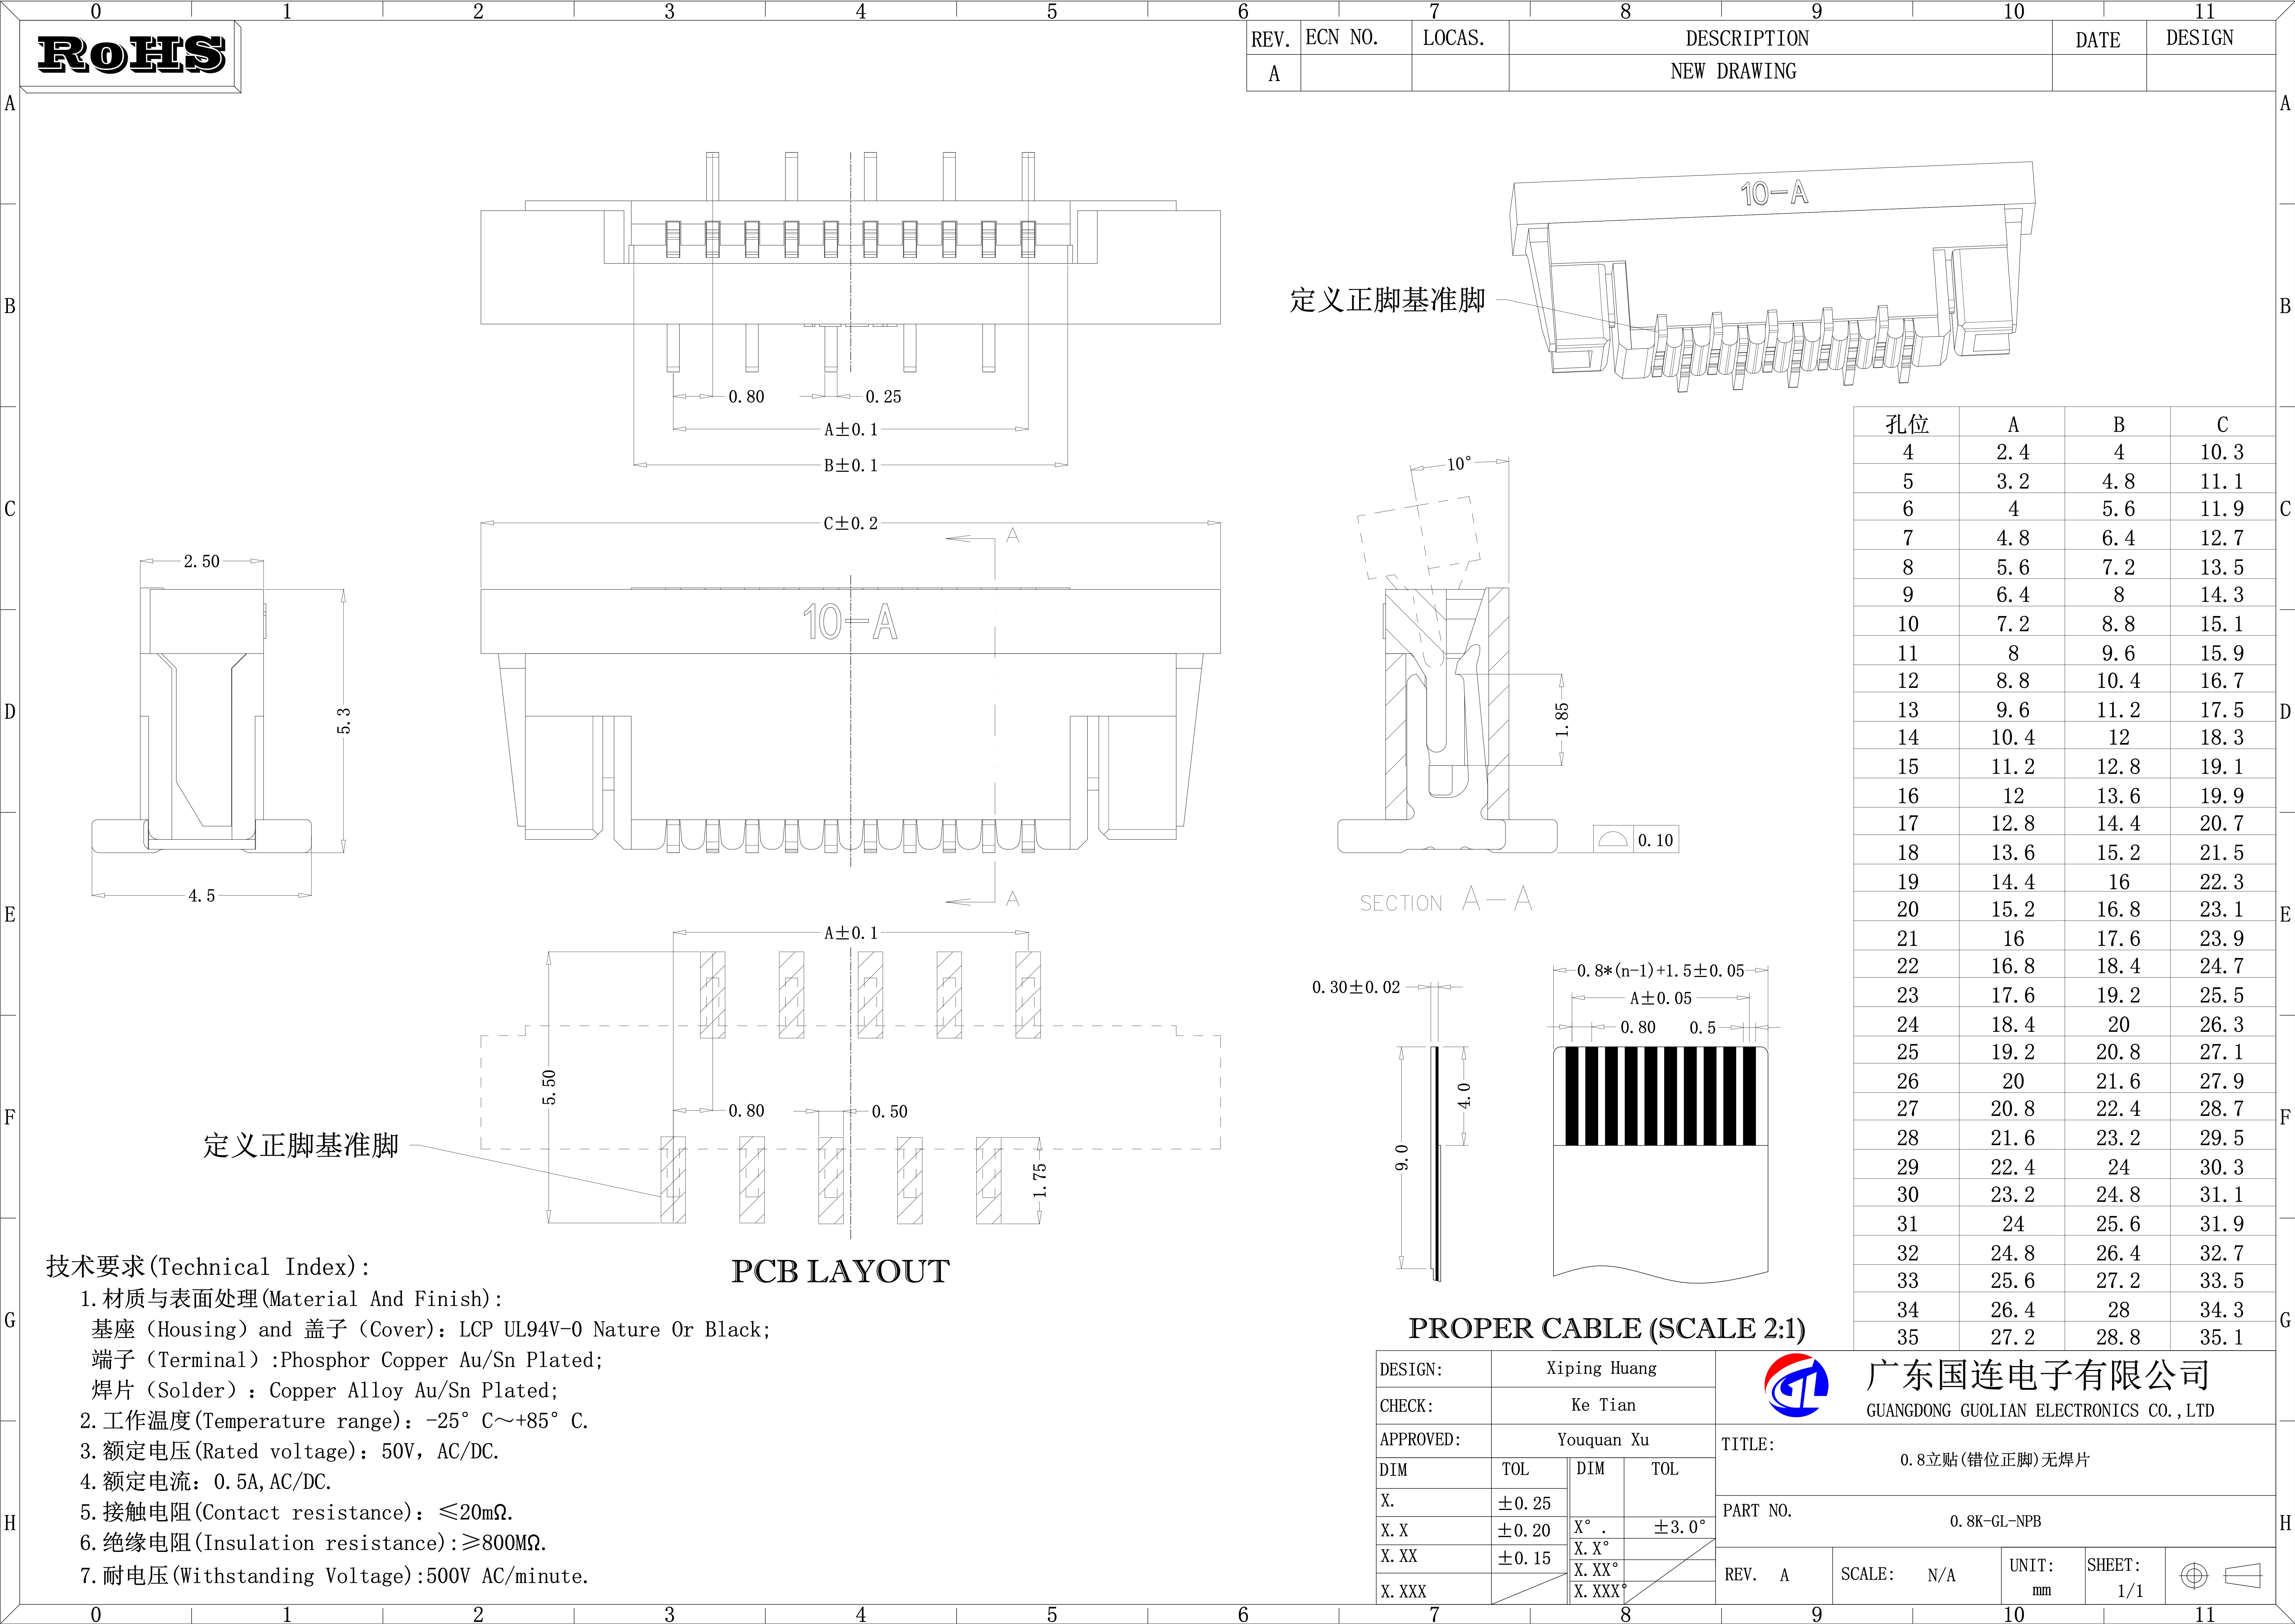

技术要求(Technical Index):

1. 材质与表面处理(Material And Finish):
基座 (Housing) and 盖子 (Cover): LCP UL94V-0 Nature Or Black;
端子 (Terminal) :Phosphor Copper Au/Sn Plated;
焊片 (Solder) : Copper Alloy Au/Sn Plated;
2. 工作温度(Temperature range): -25° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC.
4. 额定电流: 0. 5A, AC/DC.
5. 接触电阻(Contact resistance): ≤20mΩ.
6. 绝缘电阻(Insulation resistance): ≥800MΩ.
7. 耐电压(Withstanding Voltage):500V AC/minute.

PCB LAYOUT

PROPER CABLE (SCALE 2:1)

DESIGN:		Xiping Huang			广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
CHECK:		Ke Tian						
APPROVED:		Youquan Xu		TITLE: 0. 8立贴 (错位正脚) 无焊片				
DIM	TOL	DIM	TOL					
X.	±0. 25	X° . X. X° X. XX° X. XXX°	±3. 0°	PART NO. 0. 8K-GL-NPB				
X. X	±0. 20							
X. XX	±0. 15							
X. XXX								
				REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1	