


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		



3D View

Specification

- Voltage Rating : 50V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 500V AC /minute
- Insulation Resistance : ≥100MΩ min
- Temperature Range : -40℃ to + 105℃
- Contact Resistance : ≤20mΩ
- After Environmental Testing: ≤40mΩ
- Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max


Ordering Information

- 2.Category:W-Wafer
- 3.Soldering PCB Angle:R-Right angle/90°
- 4.Soldering method:S-SMD/SMT, Surface Mount Technology
- 5.Number of rows&pins:XX
- 6.Plug the pin & Special No.:Blank-Ordinary
- 7.Material(Insulators):LP-LCP,UL94V-0
- 8.Color:Blank-Natural;BK-Black
- 9.Environmental protection Standard:Blank-Ordinary
- RoHS;HF-Halogen Free
- 10.Material(Pin):PB-Phosphor Bronze
- 11.Plating :SN-Bright Tin Plated;SM-Matte Tin Plated;AU-Gold flash;AU3-Gold 3U"
- 12.Package:Blank-Tape&Reel,SPQ:4K/reel preferred



Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.20	4.20	2.64	03	2.40	5.40	3.84

DESIGN:		Xiping Huang			广东国连电子有限公司					
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD					
APPROVED:		Youquan Xu		TITLE:						
DIM	TOL	DIM	TOL	1.2卧贴2~3P						
X.	±0.25	X°	±3.0°	PART NO.						
X.X	±0.20	X.X°		A1201WV-S-NP						
X.XX	±0.15	X.XX°		REV.	A	SCALE:	N/A	UNIT:	SHEET:	
X.XXX		X.XXX°								

Circuit 1

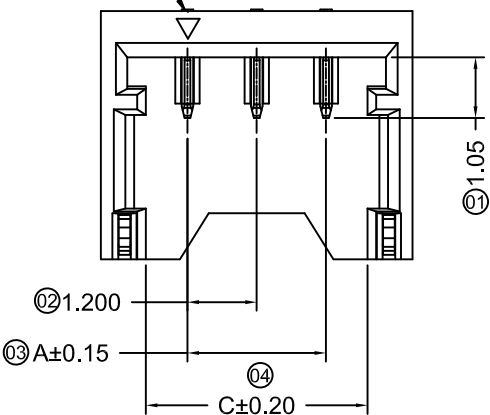

2-3 Pin
Without Sticking Point

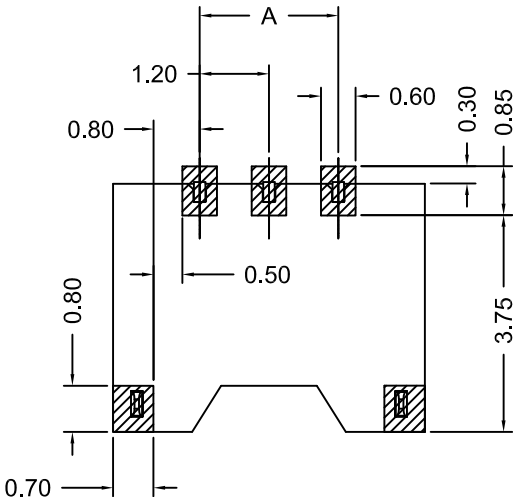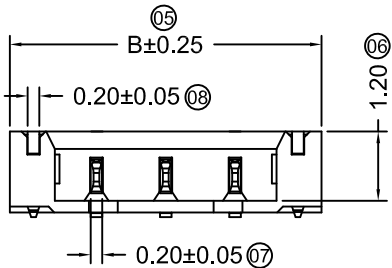

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

