



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		



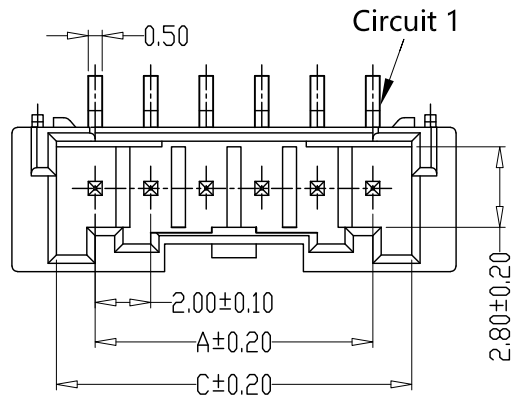


SPECIFICATIONS


- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Wafer PA6T, UL94V-0
PIN Brass Tin-plated
Solder tab Brass Tin-plated

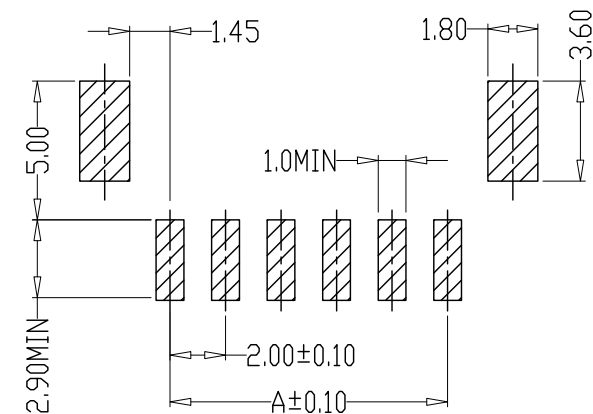


PCB LAYOUT

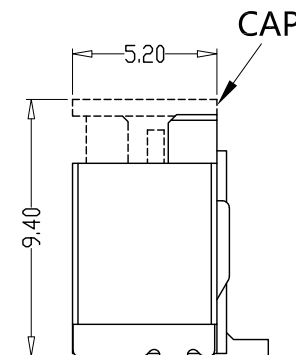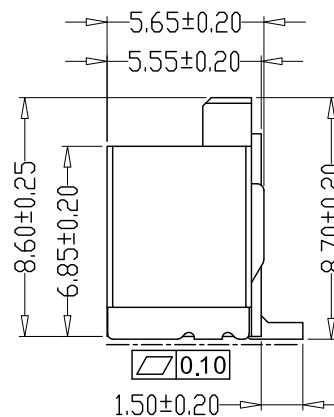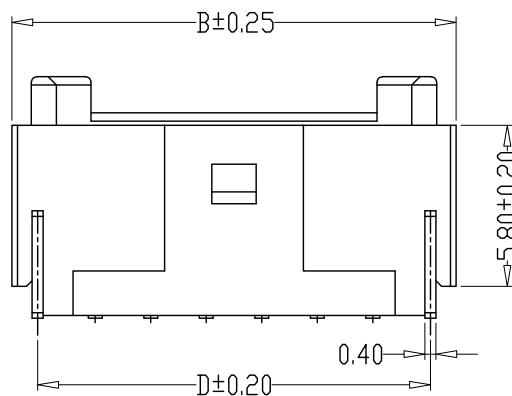

PIN	尺寸 (mm)			
	A	B	C	D
02	2.00	8.00	4.60	6.20
03	4.00	10.00	6.60	8.20
04	6.00	12.00	8.60	10.20
05	8.00	14.00	10.60	12.20
06	10.00	16.00	12.60	14.20
07	12.00	18.00	14.60	16.20
08	14.00	20.00	16.60	18.20
09	16.00	22.00	18.60	20.20
10	18.00	24.00	20.60	22.20
11	20.00	26.00	22.60	24.20
12	22.00	28.00	24.60	26.20
13	24.00	30.00	26.60	28.20
14	26.00	32.00	28.60	30.20
15	28.00	34.00	30.60	32.20
16	30.00	36.00	32.60	34.20

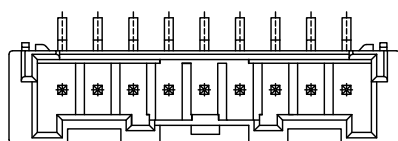


7~9AB

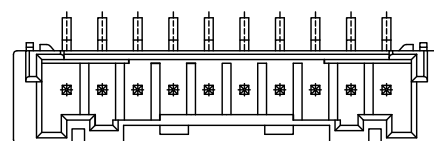

10~16AB

DESIGN:	Xiping Huang		
CHECK:	Ke Tian		
APPROVED:	Youquan Xu		
DIM	TOL	DIM	TOL
X.	±0.25	X°.	±3.0°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX		X.XXX°	



TITLE: PAE2.0立贴

PART NO. PAE2.0-NAB

REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1	
--------	------------	----------	------------	--