

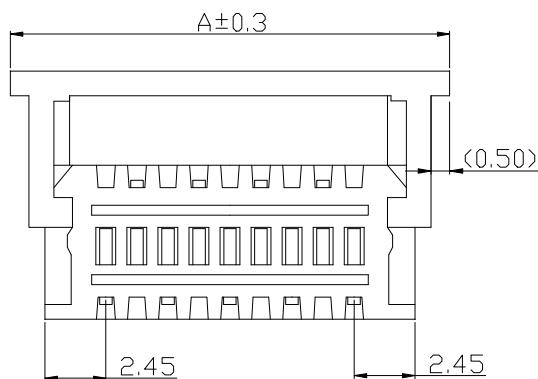
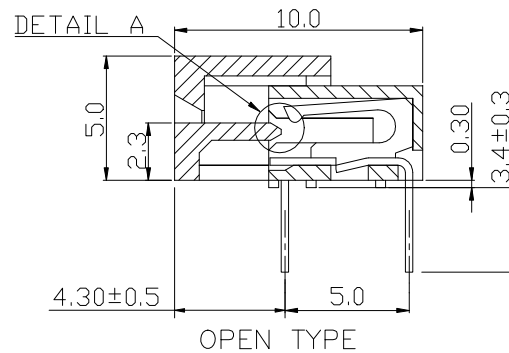




REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

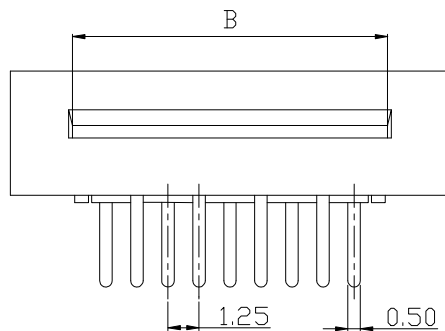


NOTES

- 1.MATERIALS:
HOUSING-PBT UL 94V-0,
TERMINAL-PHOSPHOR BRONZE.
- 2.ORDER INFORMATION:

PLATING:
0:Sn 120u"
OVER 50u" NICKEL.
G:LEAD-FREE

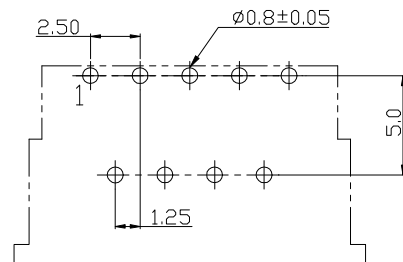

RECOMMEND PCB LAYOUT
COMPONENT SIDE
(FOR:GS15-XX1XAW)

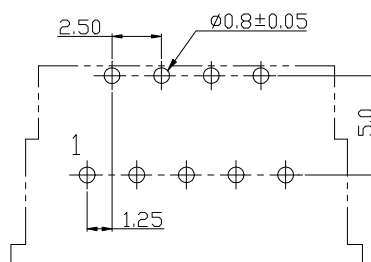

RECOMMEND PCB LAYOUT
COMPONENT SIDE
(FOR:GS15-XX1XA)

CKT	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45

DESIGN:	Xiping Huang				广东国连电子有限公司			
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:	Youquan Xu			TITLE:				
DIM	TOL	DIM	TOL	1. 25带锁弯插				
X.	±0.25	X°	±3.0°	PART NO.				
X.X	±0.20	X.X°		1. 25-J-NPW				
X.XX	±0.15	X.XX°		REV. A SCALE: N/A UNIT: SHEET: 				
X.XXX		X.XXX°						