

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:

1、所有材料符合ROHS2.0/REACH要求。

2、额定电流：3A，AC，DC；

3、额定电压：250V，AC，DC；

4、温度范围：-25℃~+85℃；

5、接触电阻：≤0.02Ω；






6、绝缘电阻：≥1000MΩ；

7、耐压：1000V，AC/minute.


8、产品料号：
A25001 - n AW - 01 T1

孔位
产品类型
AW:弯插针座

电镀
T1:镀亮锡
胶芯材质
01:PA66 白色

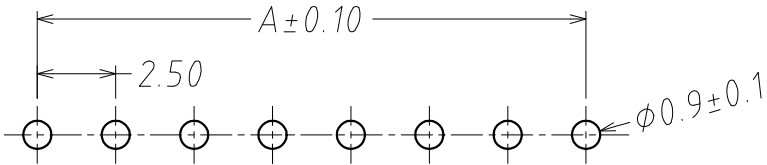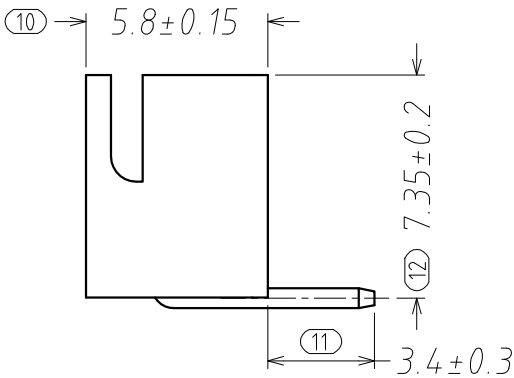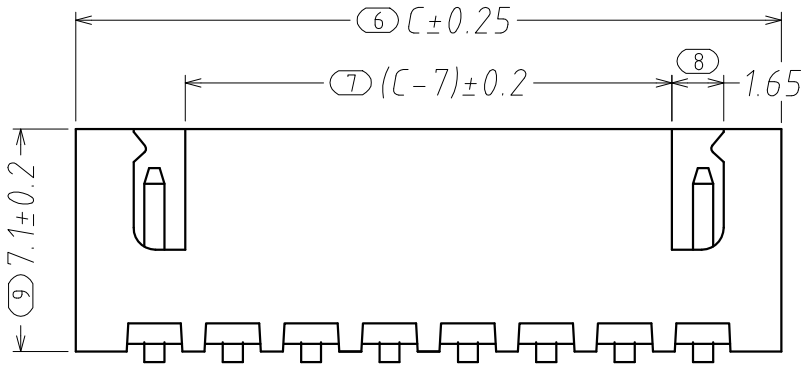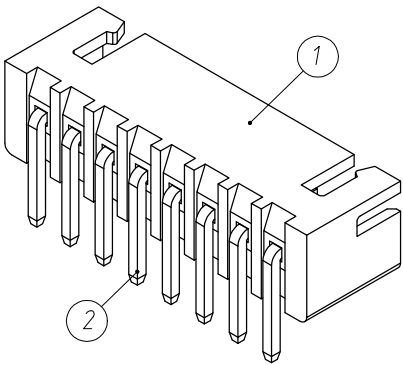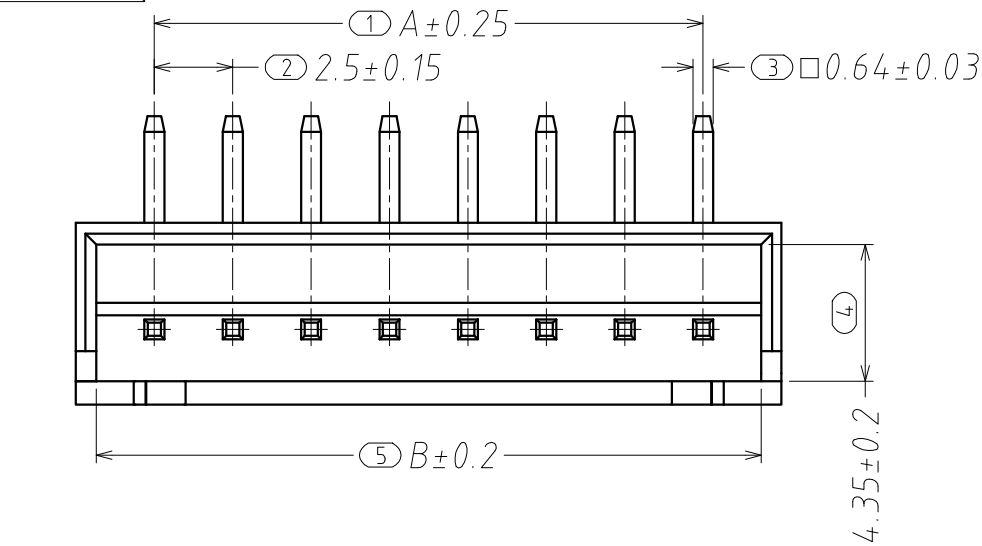

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



2PIN外观
1:2

Circuits	Dimensions(mm)		
	A	B	C
02	2.50	6.00	7.50
03	5.00	8.50	10.00
04	7.50	11.00	12.50
05	10.00	13.50	15.00
06	12.50	16.00	17.50
07	15.00	18.50	20.00
08	17.50	21.00	22.50
09	20.00	23.50	25.00
10	22.50	26.00	27.50
11	25.00	28.50	30.00
12	27.50	31.00	32.50
13	30.00	33.50	35.00
14	32.50	36.00	37.50
15	35.00	38.50	40.00
16	37.50	41.00	42.50

2	端子 Contact	黄铜 Brass	n×1	电镀(锡): 整个表面镀底锡30u"MIN,再镀锡 80u"MIN..
1	基座 Wafer	PA66 (UL94V-0)	1	白色
序号	名称	材料	数量	附注

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu		TITLE:				
DIM	TOL	DIM	TOL	XH2. 5弯针				
X.	±0.25			PART NO.				
X. X	±0.20	X°	±3.0°	A25001-nAW-01T1				
X. XX	±0.15	X. X°		REV. A				
X. XXX		X. XX°						SCALE: N/A
		X. XXX°		UNIT: mm				
				SHEET: 1/1				
								