

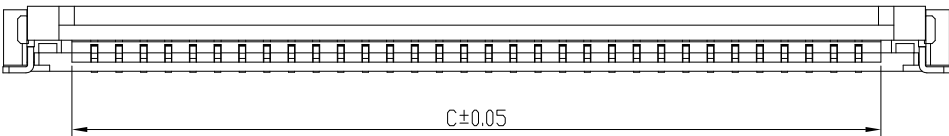
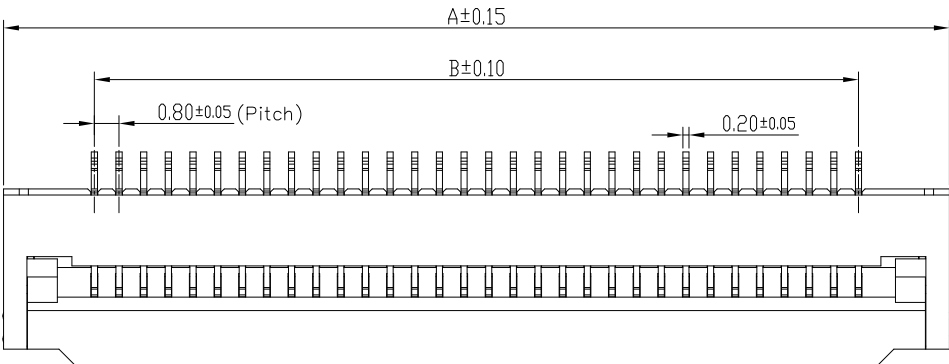


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

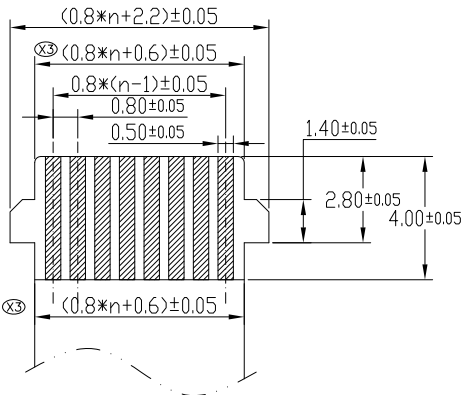


- NOTES:
MATERIAL
- HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
 - ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
 - TERMINAL:PHOSPHOR BRONZE
PLATING: 1u"GOLD or 80~150u"MATTE-TIN (LEAD FREE)
50~100u"NICKEL UNDER PLATING OVER ALL.
 - FITTING NAIL:BRASS
PLATING:80~150u"MATTE-TIN(LEAD FREE)
50~100u"NICKEL UNDER PLATING OVER ALL .
- ELECTRICAL PROPERTIES
- OPERATING VOLTAGE:50V AC,DC
 - CURRENT RATING:0.3A AC,DC
 - OPERATING TEMPERATURE:-25°C~+85°C

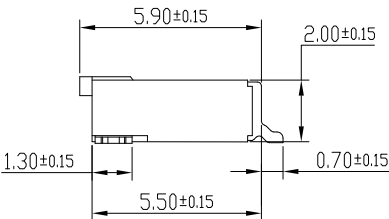

RECOMMENDED FFC SIZE
THICKNESS 0.3±0.01

No. of Contacts	DIM.		
	A	B	C [ⓧ]
12	14.70	8.80	10.26
30	29.10	23.20	24.66
32	30.70	24.80	26.26
36	33.90	28.00	29.46

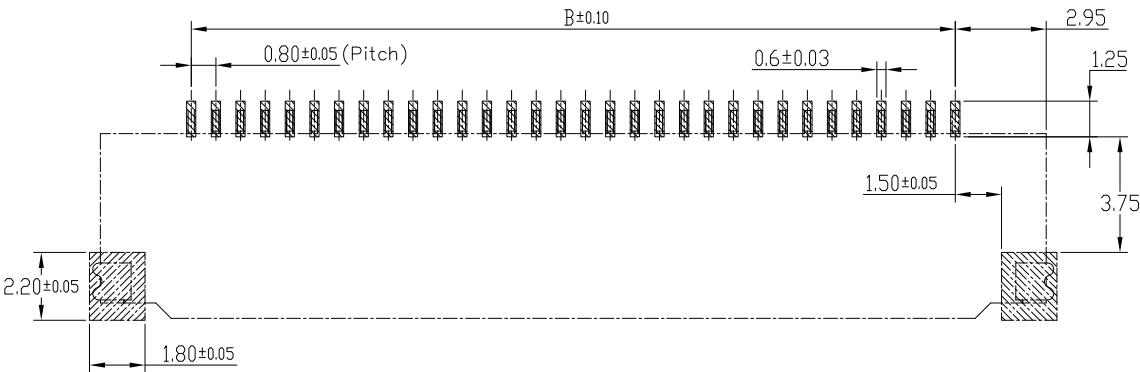

DESIGN:		Xiping Huang			广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD	
CHECK:		Ke Tian				
APPROVED:		Youquan Xu		TITLE: 0.8翻盖下接32P H2.0		
DIM	TOL	DIM	TOL			
X.	±0.25			PART NO. 0820-32CL-SN		
X. X	±0.20	X°.	±3.0°			
X. XX	±0.15	X. X°		REV. A		
		X. XX°				
X. XXX		X. XXX°		SCALE:	N/A	UNIT: mm
						SHEET: 1/1
						