

REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:

1、所有材料符合ROHS2.0/REACH要求。

2、额定电流: 1A, AC, DC;

3、额定电压: 125V, AC, DC;

4、温度范围: -25℃~+85℃;

5、接触电阻: ≤0.02Ω;

6、绝缘电阻: ≥100MΩ;

7、耐压: 500V, AC/minute.

8、适用线规: AWG#32 to #28

9、产品料号:

A12501 - n A - 02 T1




孔位 ————— A — 02 T1

产品类型 ————— 电镀


A:直插针座 ————— T1:镀亮锡

————— 胶芯材质

02:PA66米色

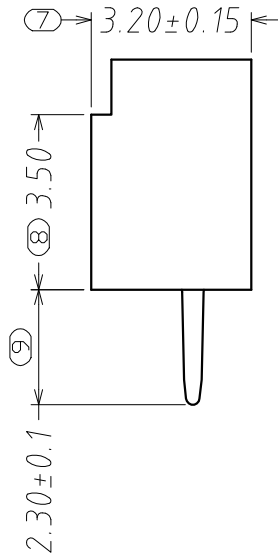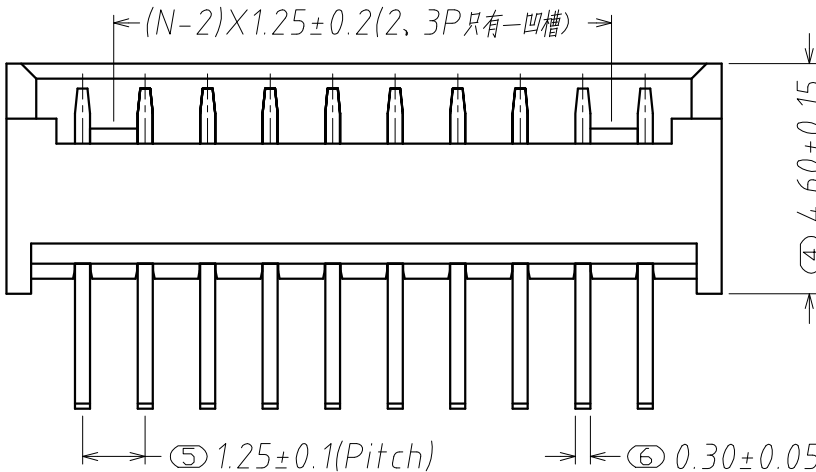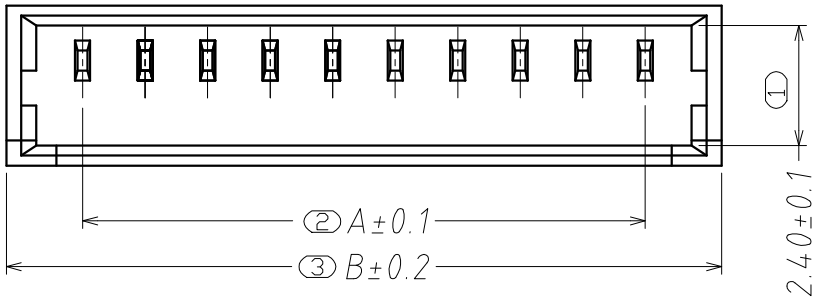

Circuits	Dimensions (mm)	
	A	B
02	1.25	4.30
03	2.50	5.55
04	3.75	6.80
05	5.00	8.05
06	6.25	9.30
07	7.50	10.55
08	8.75	11.80
09	10.00	13.05
10	11.25	14.30
11	12.50	15.55
12	13.75	16.80
13	15.00	18.05
14	16.25	19.30
15	17.50	20.55
16	18.75	21.80

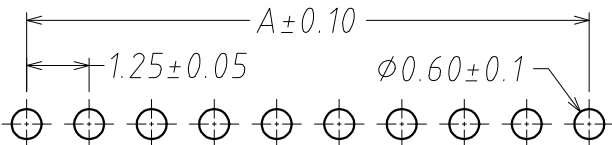

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	PA66 (UL94V-0)	1	米色
序号	名 称	材 料	数 量	附 注

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu			TITLE:			
DIM	TOL	DIM	TOL	1. 25T直针				
X.	±0.25			PART NO. A12501-nA-02T1				
X. X	±0.20	X°	±3.0°					
X. XX	±0.15	X. X°		REV. A				
X. XXX		X. XX°						SCALE: N/A
		X. XXX°		UNIT: mm				
								SHEET: 1/1
								