


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

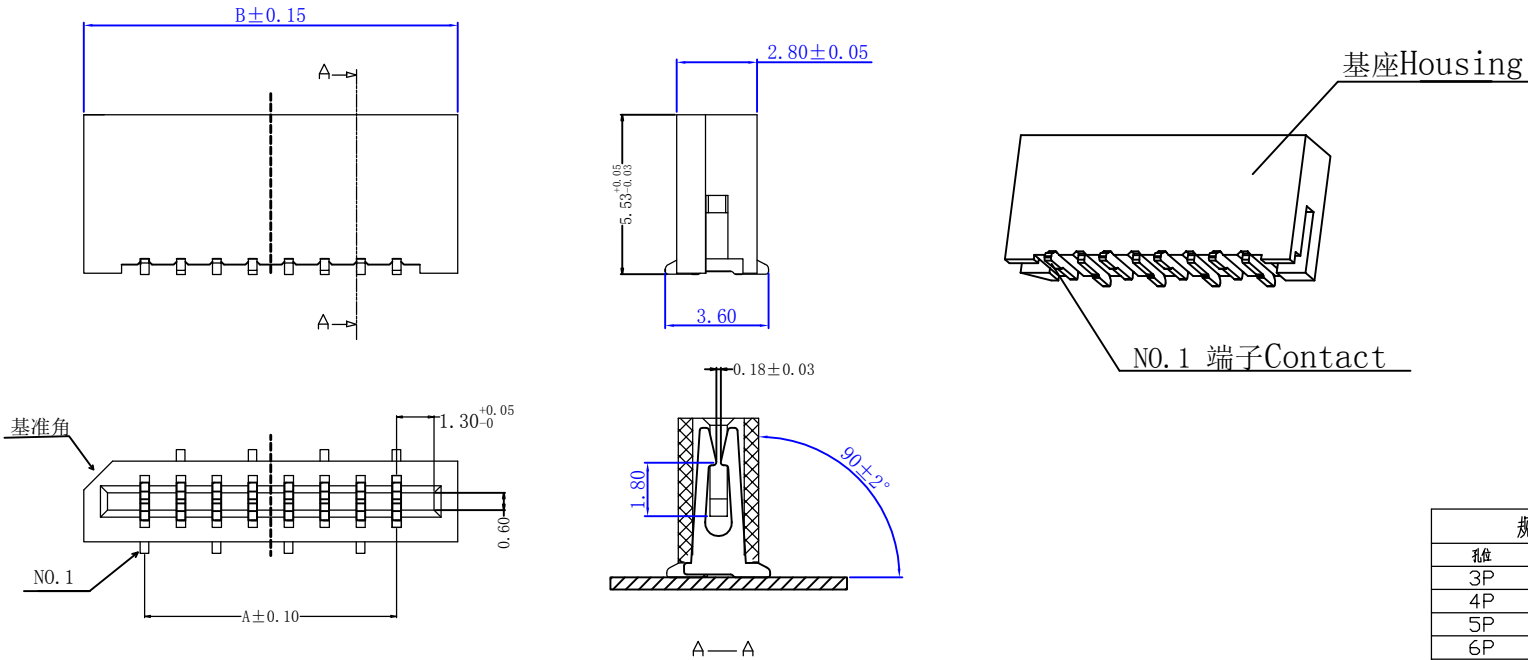

规格尺寸		
规格	A	B
3P	2.50	6.75
4P	3.75	8.00
5P	5.00	9.25
6P	6.25	10.50
7P	7.50	11.75
8P	8.75	13.00
9P	10.00	14.25
10P	11.25	15.50
11P	12.50	16.75
12P	13.75	18.00
13P	15.00	19.25
14P	16.25	20.50
15P	17.50	21.75
16P	18.75	23.00
17P	20.00	24.25
18P	21.25	25.50
19P	22.50	26.75
20P	23.75	28.00
21P	25.00	29.25
22P	26.25	30.50
23P	27.50	31.75
24P	28.75	33.00
25P	30.00	34.25
26P	31.25	35.50
27P	32.50	36.75
28P	33.75	38.00

技术参数 SPECIFICATIONS

间距 (Pitch): 1.25

极数 (Poles): 3~28P

额定电压 (Voltage rating): 50V DC/AC

额定电流 (Current rating): 0.5A DC/AC

耐压值 (Withstand Voltage): 500VAC/m

工作温度 (Working Temperature): -25℃~+85℃

绝缘电阻 (Insulation Resistance): ≥500MΩ

接触电阻 (Contact resistance): ≤30mΩ



双面接触 (Double-sided contact)

材料 Material

接触件 (Contact): 磷青铜 亮锡 Phosphor Bronze Tin-plated

塑胶主体 (Housing): 耐热树脂PA9T/LCP黑色 (UL94V-0) PA/LCP Black Heat

resistance plastic (UL94V-0)

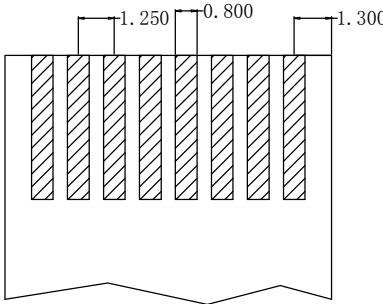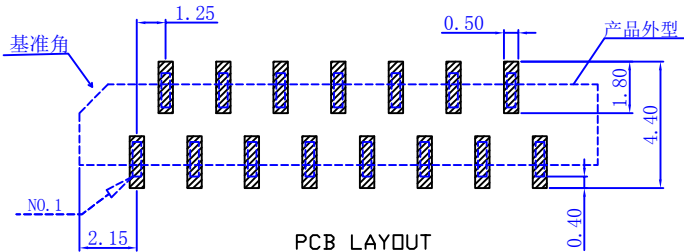

适用电缆(proper cable)
($\delta=0.3\pm0.02\text{mm}$)

DESIGN:		Xiping Huang			广东国连电子有限公司				
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD				
APPROVED:		Youquan Xu			TITLE:				
DIM	TOL	DIM	TOL	1.25双面接立贴					
X.	±0.25	X°		PART NO.					
X.X	±0.20	X°.X°	±3.0°						
X.XX	±0.15	X.XX°		1.25-B-NPB					
X.XXX		X.XXX°							
REV.		A		SCALE:		N/A	UNIT:	SHEET:	
							mm	1/1	