
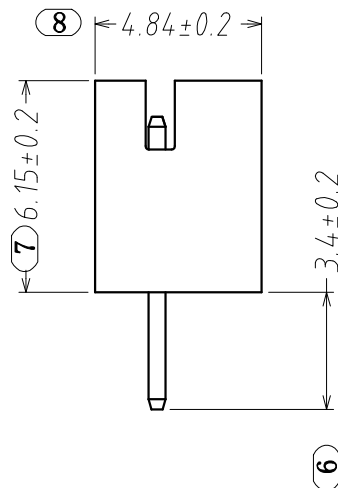
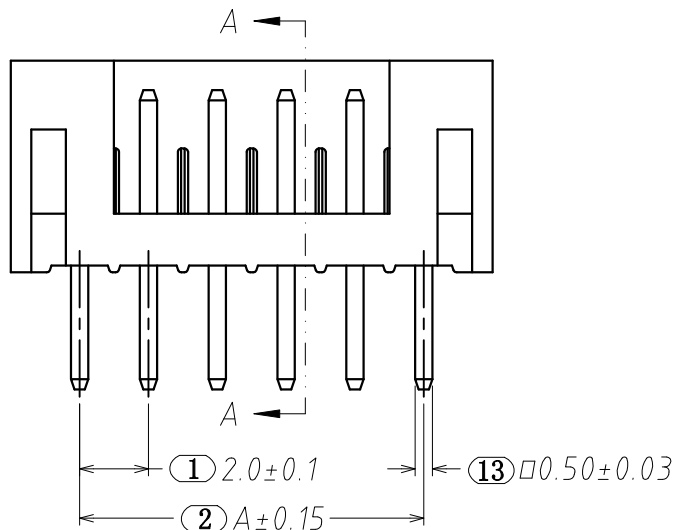
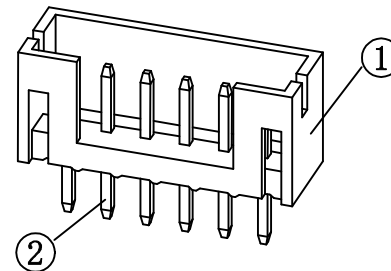
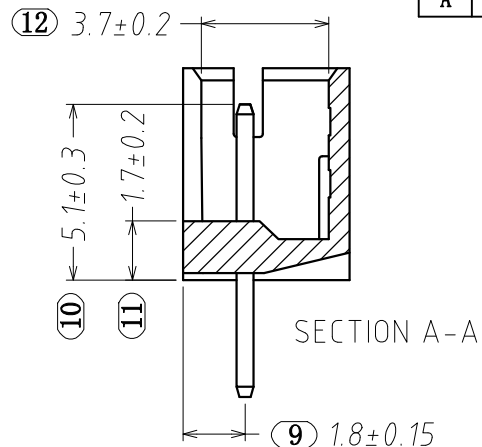


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

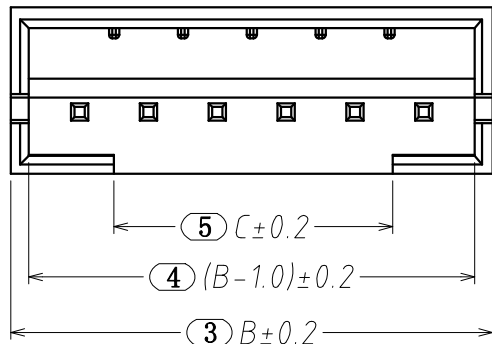

技术参数:

- 1、所有材料符合ROHS2.0/REACH法规。
- 2、额定电流: 2A, AC, DC;
- 3、额定电压: 100V, AC, DC;
- 4、温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
- 5、接触电阻: $\leq 0.02 \Omega$;
- 6、绝缘电阻: $\geq 1000 \text{M} \Omega$;
- 7、耐压: 500V, AC/minute.
- 8、适用线规: AWG#32 to #24
- 9、产品料号:

A20001 - n A - 01 T1

孔位

产品类型

A: 直插针座


电镀

T1: 镀亮锡

胶芯材质

01: PA66 白色

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	6.00	1.00
03	4.00	8.00	2.00
04	6.00	10.00	4.00
05	8.00	12.00	6.00
06	10.00	14.00	8.00
07	12.00	16.00	10.00
08	14.00	18.00	12.00
09	16.00	20.00	14.00
10	18.00	22.00	16.00
11	20.00	24.00	18.00
12	22.00	26.00	20.00
13	24.00	28.00	22.00
14	26.00	30.00	24.00
15	28.00	32.00	26.00
16	30.00	34.00	28.00
17	32.00	36.00	30.00
18	34.00	38.00	32.00
19	36.00	40.00	34.00
20	38.00	42.00	36.00

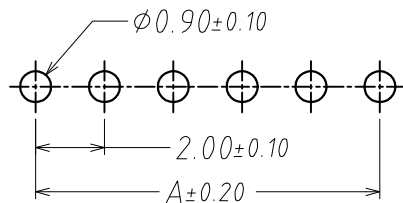

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

2	端子 Contact	黄铜	n×1	电镀(锡): 整个表面镀层30u"MIN, 厚度80u"MIN.
1	基板 Wafer	PA66(UL94V-0)	1	绝缘
序号	名称	材料	数量	附注

DESIGN:	Xiping Huang				广东国连电子有限公司			
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:	Youquan Xu			TITLE:				
DIM	TOL	DIM	TOL	PH2.0直针				
X.	±0.25	X°	±3.0°	PART NO.				
X.X	±0.20	X.X°		A20001-na-01T1				
X.XX	±0.15	X.XX°		REV. A				
X.XXX		X.XXX°		SCALE:	N/A	UNIT:	SHEET:	
						mm	1/1	