
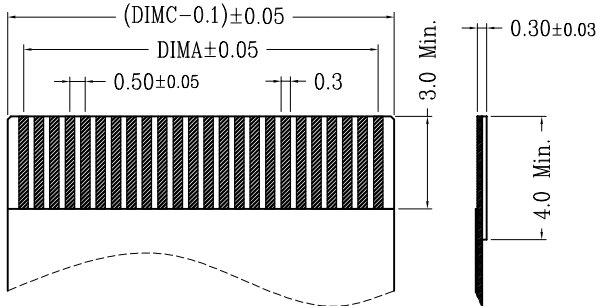
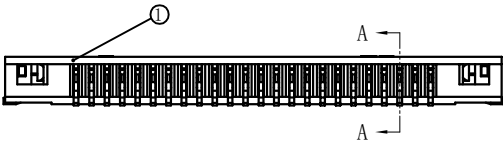
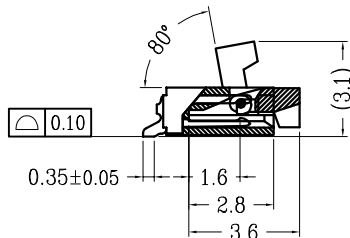

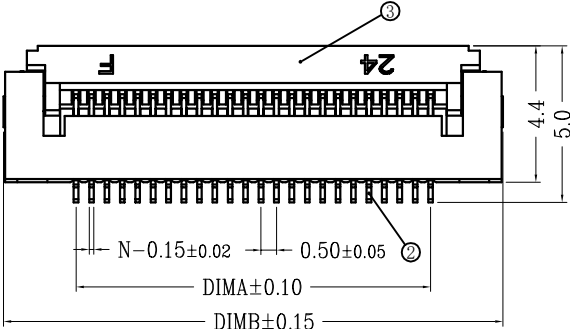
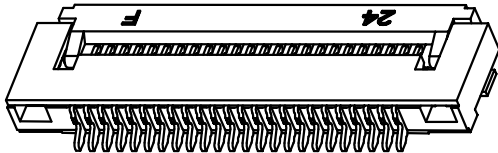


| REV. | ECN NO. | LOCAS. | DESCRIPTION | DATE | DESIGN |
|------|---------|--------|-------------|------|--------|
| A    |         |        | NEW DRAWING |      |        |

| 序号 | 品名             | 材质             |
|----|----------------|----------------|
| ①  | 0.5掀盖胶芯 (H1.5) | LCP UL94V-0 本色 |
| ②  | 0.5掀盖端子 (H1.5) | 铜合金/表面镀锡 镀金    |
| ③  | 0.5掀盖后盖 (H1.5) | LCP UL94V-0 黑色 |
| ④  | 0.5掀盖焊片 (H1.5) | 铜合金/表面镀锡       |

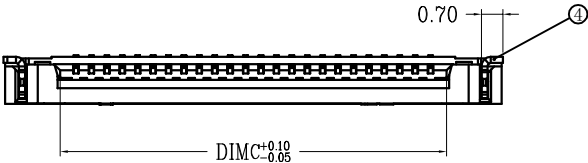


适用扁平线 (Applicable Flat Cable)

| CKT | DIMA  | DIMB  | DIMC  | CKT | DIMA  | DIMB  | DIMC  |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 4   | 1.50  | 6.20  | 2.53  | 33  | 16.00 | 20.70 | 17.03 |
| 5   | 2.00  | 6.70  | 3.03  | 34  | 16.50 | 21.20 | 17.53 |
| 6   | 2.50  | 7.20  | 3.53  | 35  | 17.00 | 21.70 | 18.03 |
| 7   | 3.00  | 7.70  | 4.03  | 36  | 17.50 | 22.20 | 18.53 |
| 8   | 3.50  | 8.20  | 4.53  | 37  | 18.00 | 22.70 | 19.03 |
| 9   | 4.00  | 8.70  | 5.03  | 38  | 18.50 | 23.20 | 19.53 |
| 10  | 4.50  | 9.20  | 5.53  | 39  | 19.00 | 23.70 | 20.03 |
| 11  | 5.00  | 9.70  | 6.03  | 40  | 19.50 | 24.20 | 20.53 |
| 12  | 5.50  | 10.20 | 6.53  | 41  | 20.00 | 24.70 | 21.03 |
| 13  | 6.00  | 10.70 | 7.03  | 42  | 20.50 | 25.20 | 21.53 |
| 14  | 6.50  | 11.20 | 7.53  | 43  | 21.00 | 25.70 | 22.03 |
| 15  | 7.00  | 11.70 | 8.03  | 44  | 21.50 | 26.20 | 22.53 |
| 16  | 7.50  | 12.20 | 8.53  | 45  | 22.00 | 26.70 | 23.03 |
| 17  | 8.00  | 12.70 | 9.03  | 46  | 22.50 | 27.20 | 23.53 |
| 18  | 8.50  | 13.20 | 9.53  | 47  | 23.00 | 27.70 | 24.03 |
| 19  | 9.00  | 13.70 | 10.03 | 48  | 23.50 | 28.20 | 24.53 |
| 20  | 9.50  | 14.20 | 10.53 | 49  | 24.00 | 28.70 | 25.03 |
| 21  | 10.00 | 14.70 | 11.03 | 50  | 24.50 | 29.20 | 25.53 |
| 22  | 10.50 | 15.20 | 11.53 | 51  | 25.00 | 29.70 | 26.03 |
| 23  | 11.00 | 15.70 | 12.03 | 52  | 25.50 | 30.20 | 26.53 |
| 24  | 11.50 | 16.20 | 12.53 | 53  | 26.00 | 30.70 | 27.03 |
| 25  | 12.00 | 16.70 | 13.03 | 54  | 26.50 | 31.20 | 27.53 |
| 26  | 12.50 | 17.20 | 13.53 | 55  | 27.00 | 31.70 | 28.03 |
| 27  | 13.00 | 17.70 | 14.03 | 56  | 27.50 | 32.20 | 28.53 |
| 28  | 13.50 | 18.20 | 14.53 | 57  | 28.00 | 32.70 | 29.03 |
| 29  | 14.00 | 18.70 | 15.03 | 58  | 28.50 | 33.20 | 29.53 |
| 30  | 14.50 | 19.20 | 15.53 | 59  | 29.00 | 33.70 | 30.03 |
| 31  | 15.00 | 19.70 | 16.03 | 60  | 29.50 | 34.20 | 30.53 |
| 32  | 15.50 | 20.20 | 16.53 |     |       |       |       |

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ

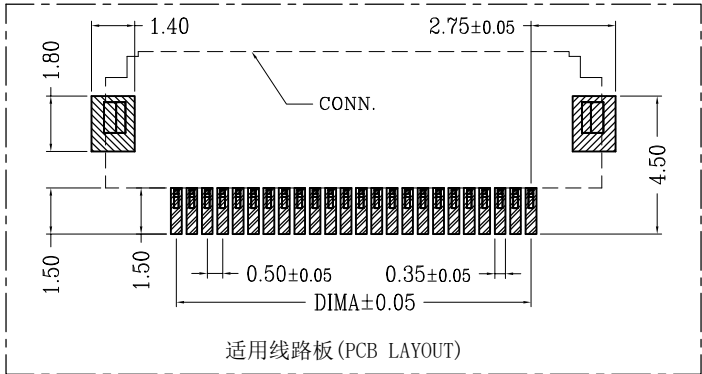

适用线路板 (PCB LAYOUT)

|           |              |                                                                                                                                                   |       |                      |  |
|-----------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------|--|
| DESIGN:   | Xiping Huang |  <b>广东国连电子有限公司</b><br>GUANGDONG GUOLIAN ELECTRONICS CO., LTD |       |                      |  |
| CHECK:    | Ke Tian      |                                                                                                                                                   |       |                      |  |
| APPROVED: | Youquan Xu   | TITLE: 0.5翻盖H1.5                                                                                                                                  |       |                      |  |
| DIM       | TOL          | DIM                                                                                                                                               | TOL   | PART NO. 0515-nCL-SN |  |
| X.        | ±0.25        | X°.                                                                                                                                               | ±3.0° | REV. A               |  |
| X.X       | ±0.20        | X.X°                                                                                                                                              |       | SCALE: N/A           |  |
| X.XX      | ±0.15        | X.XX°                                                                                                                                             |       | UNIT: mm             |  |
| X.XXX     |              | X.XXX°                                                                                                                                            |       | SHEET: 1/1           |  |