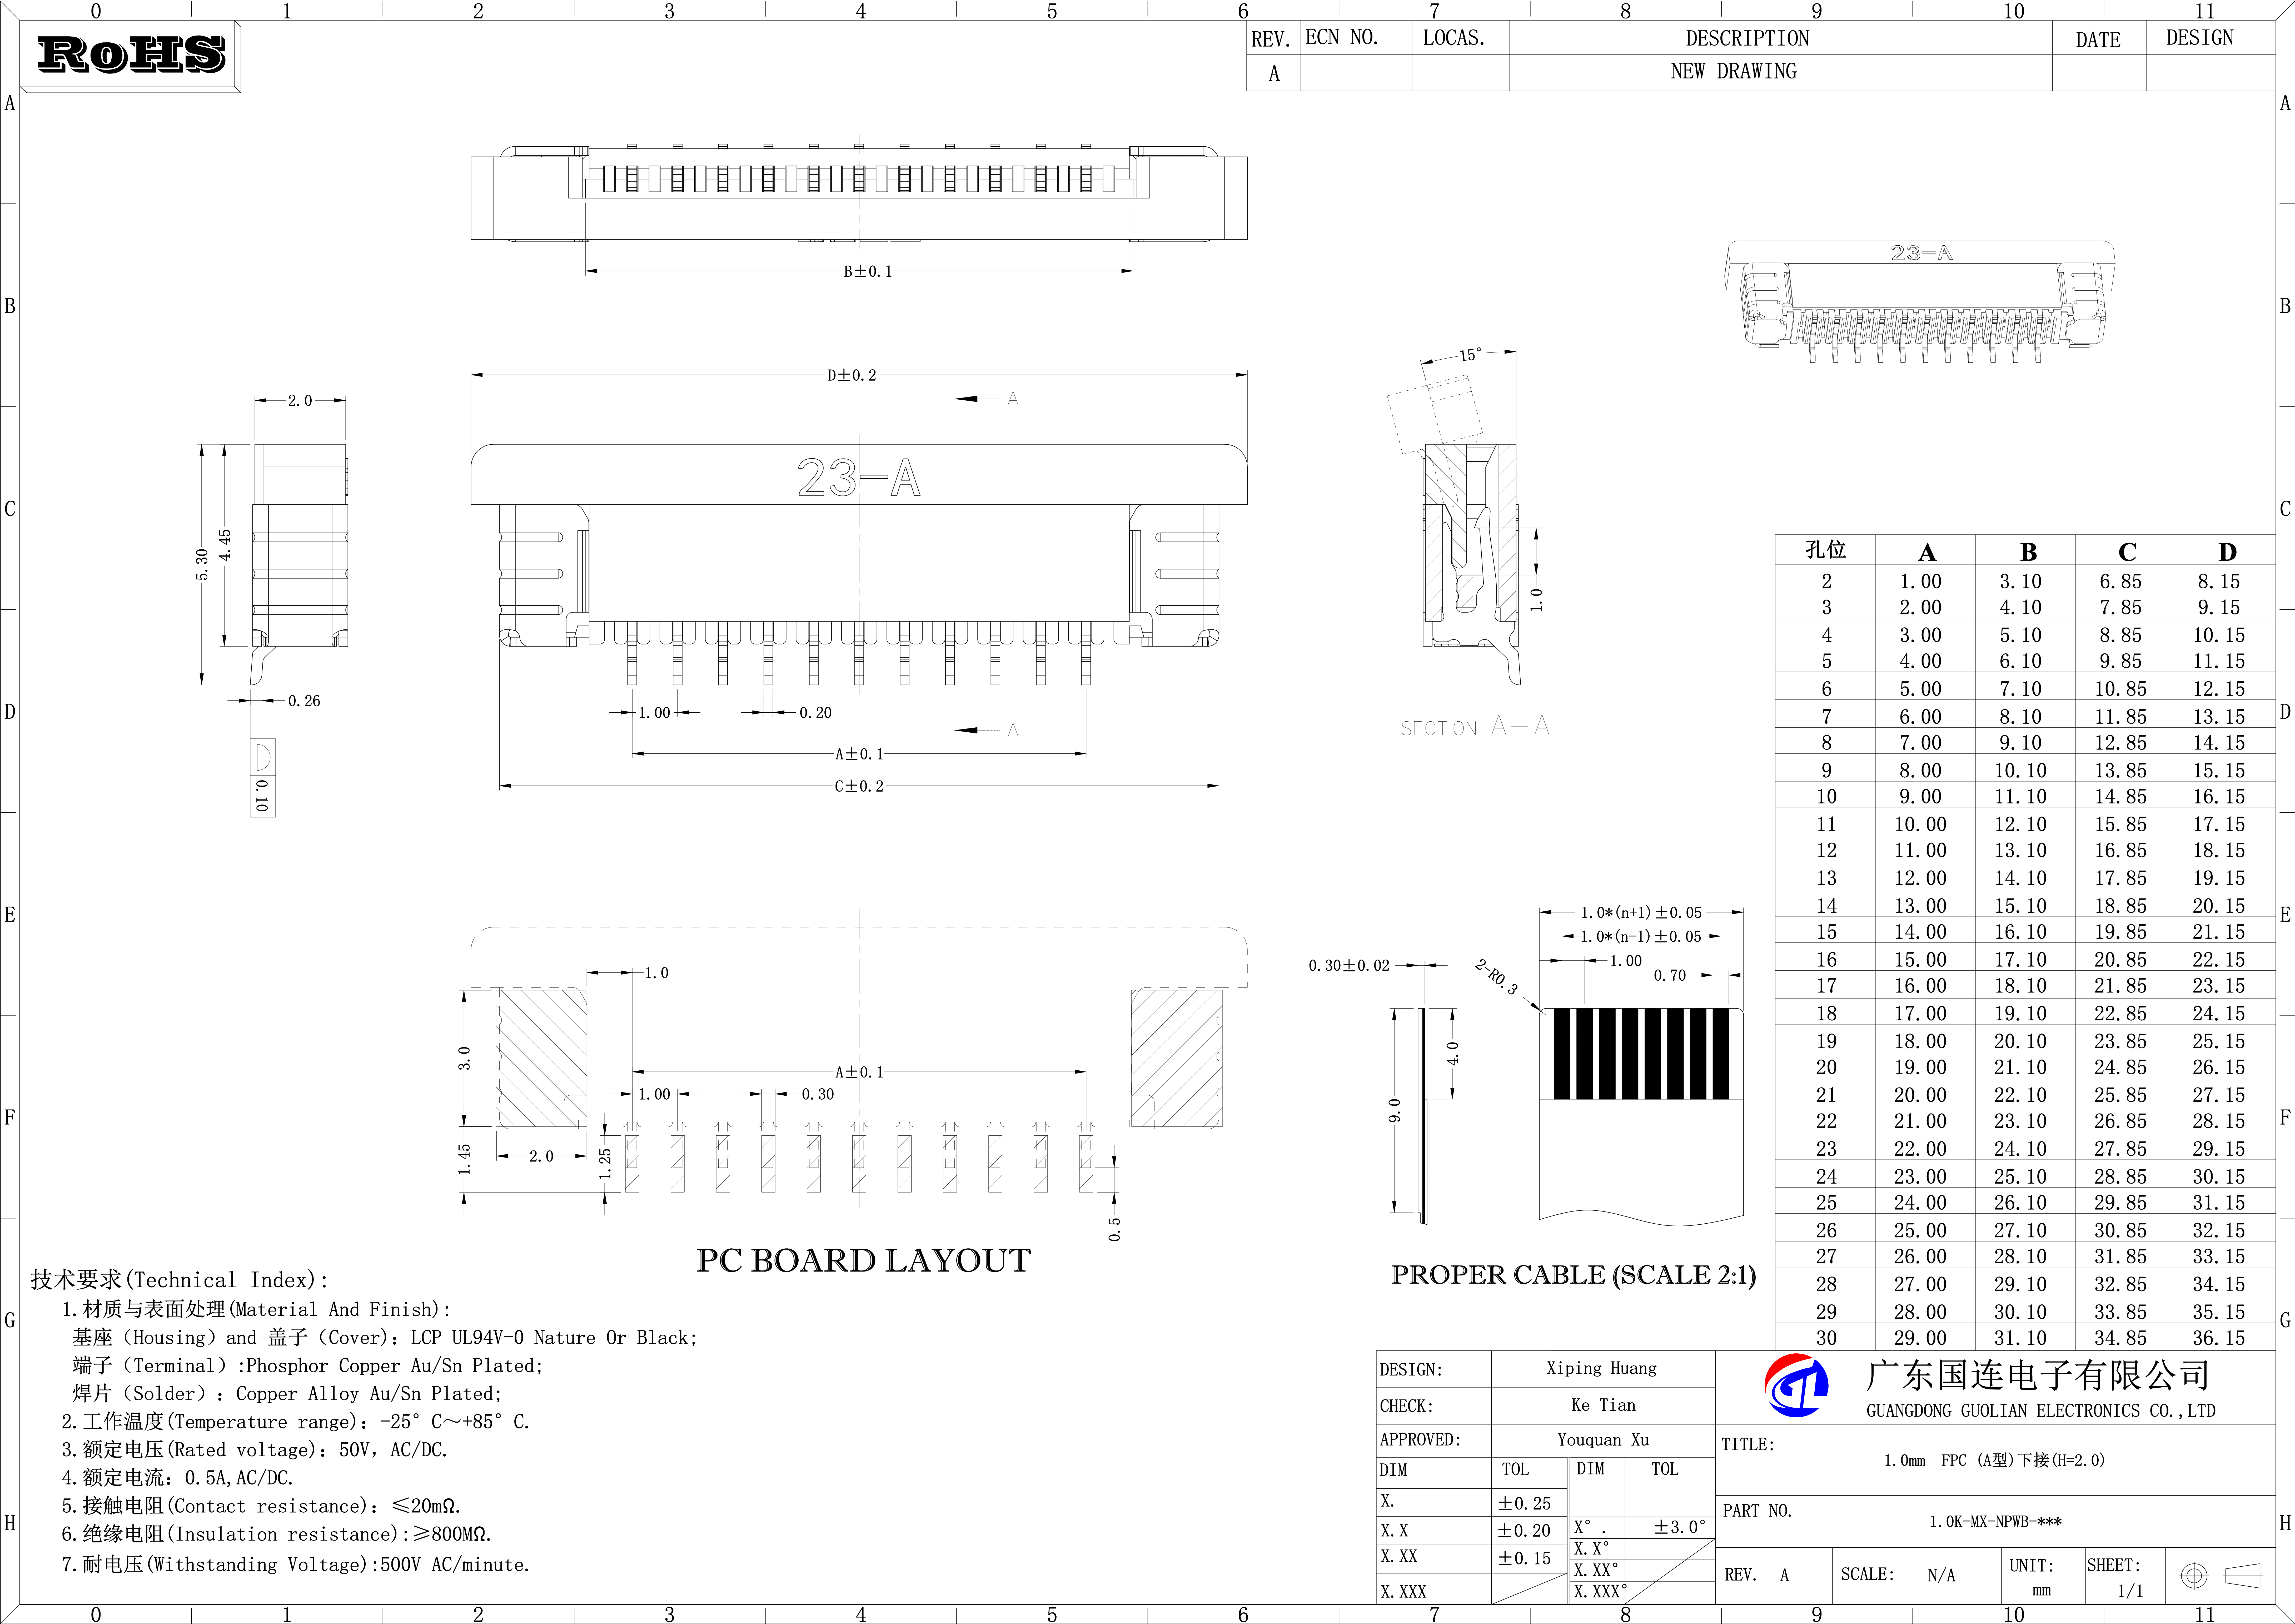
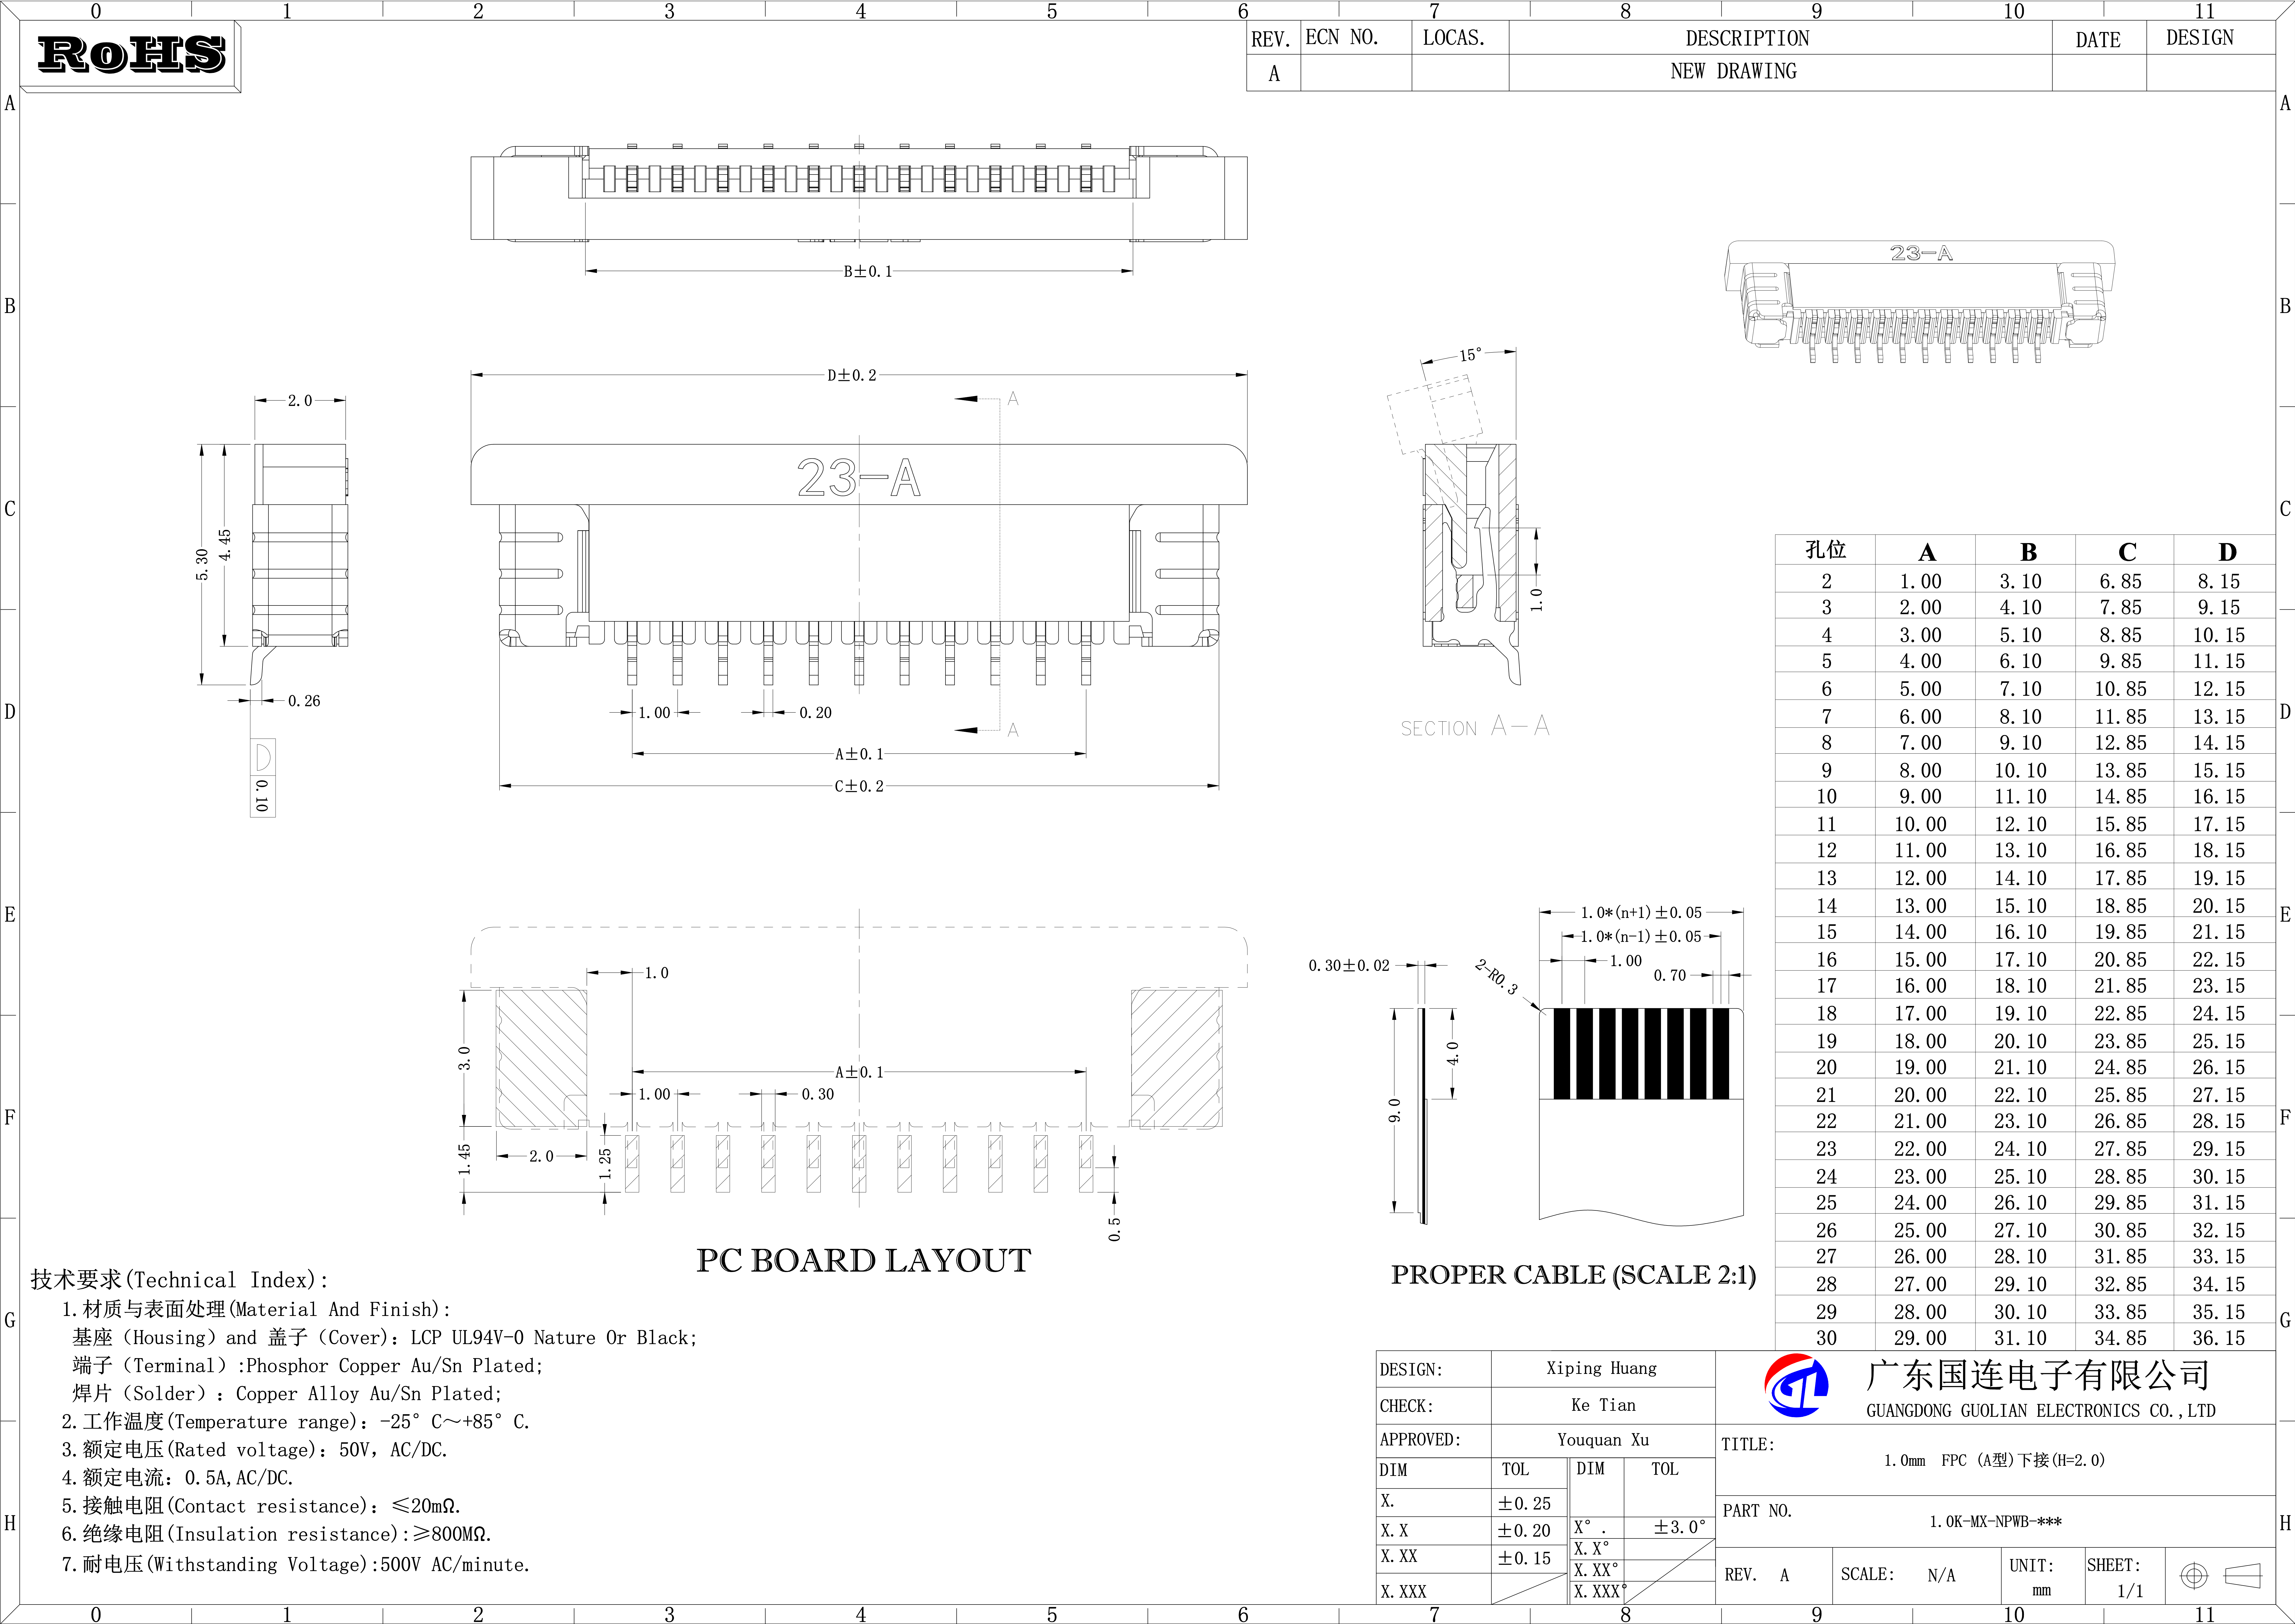
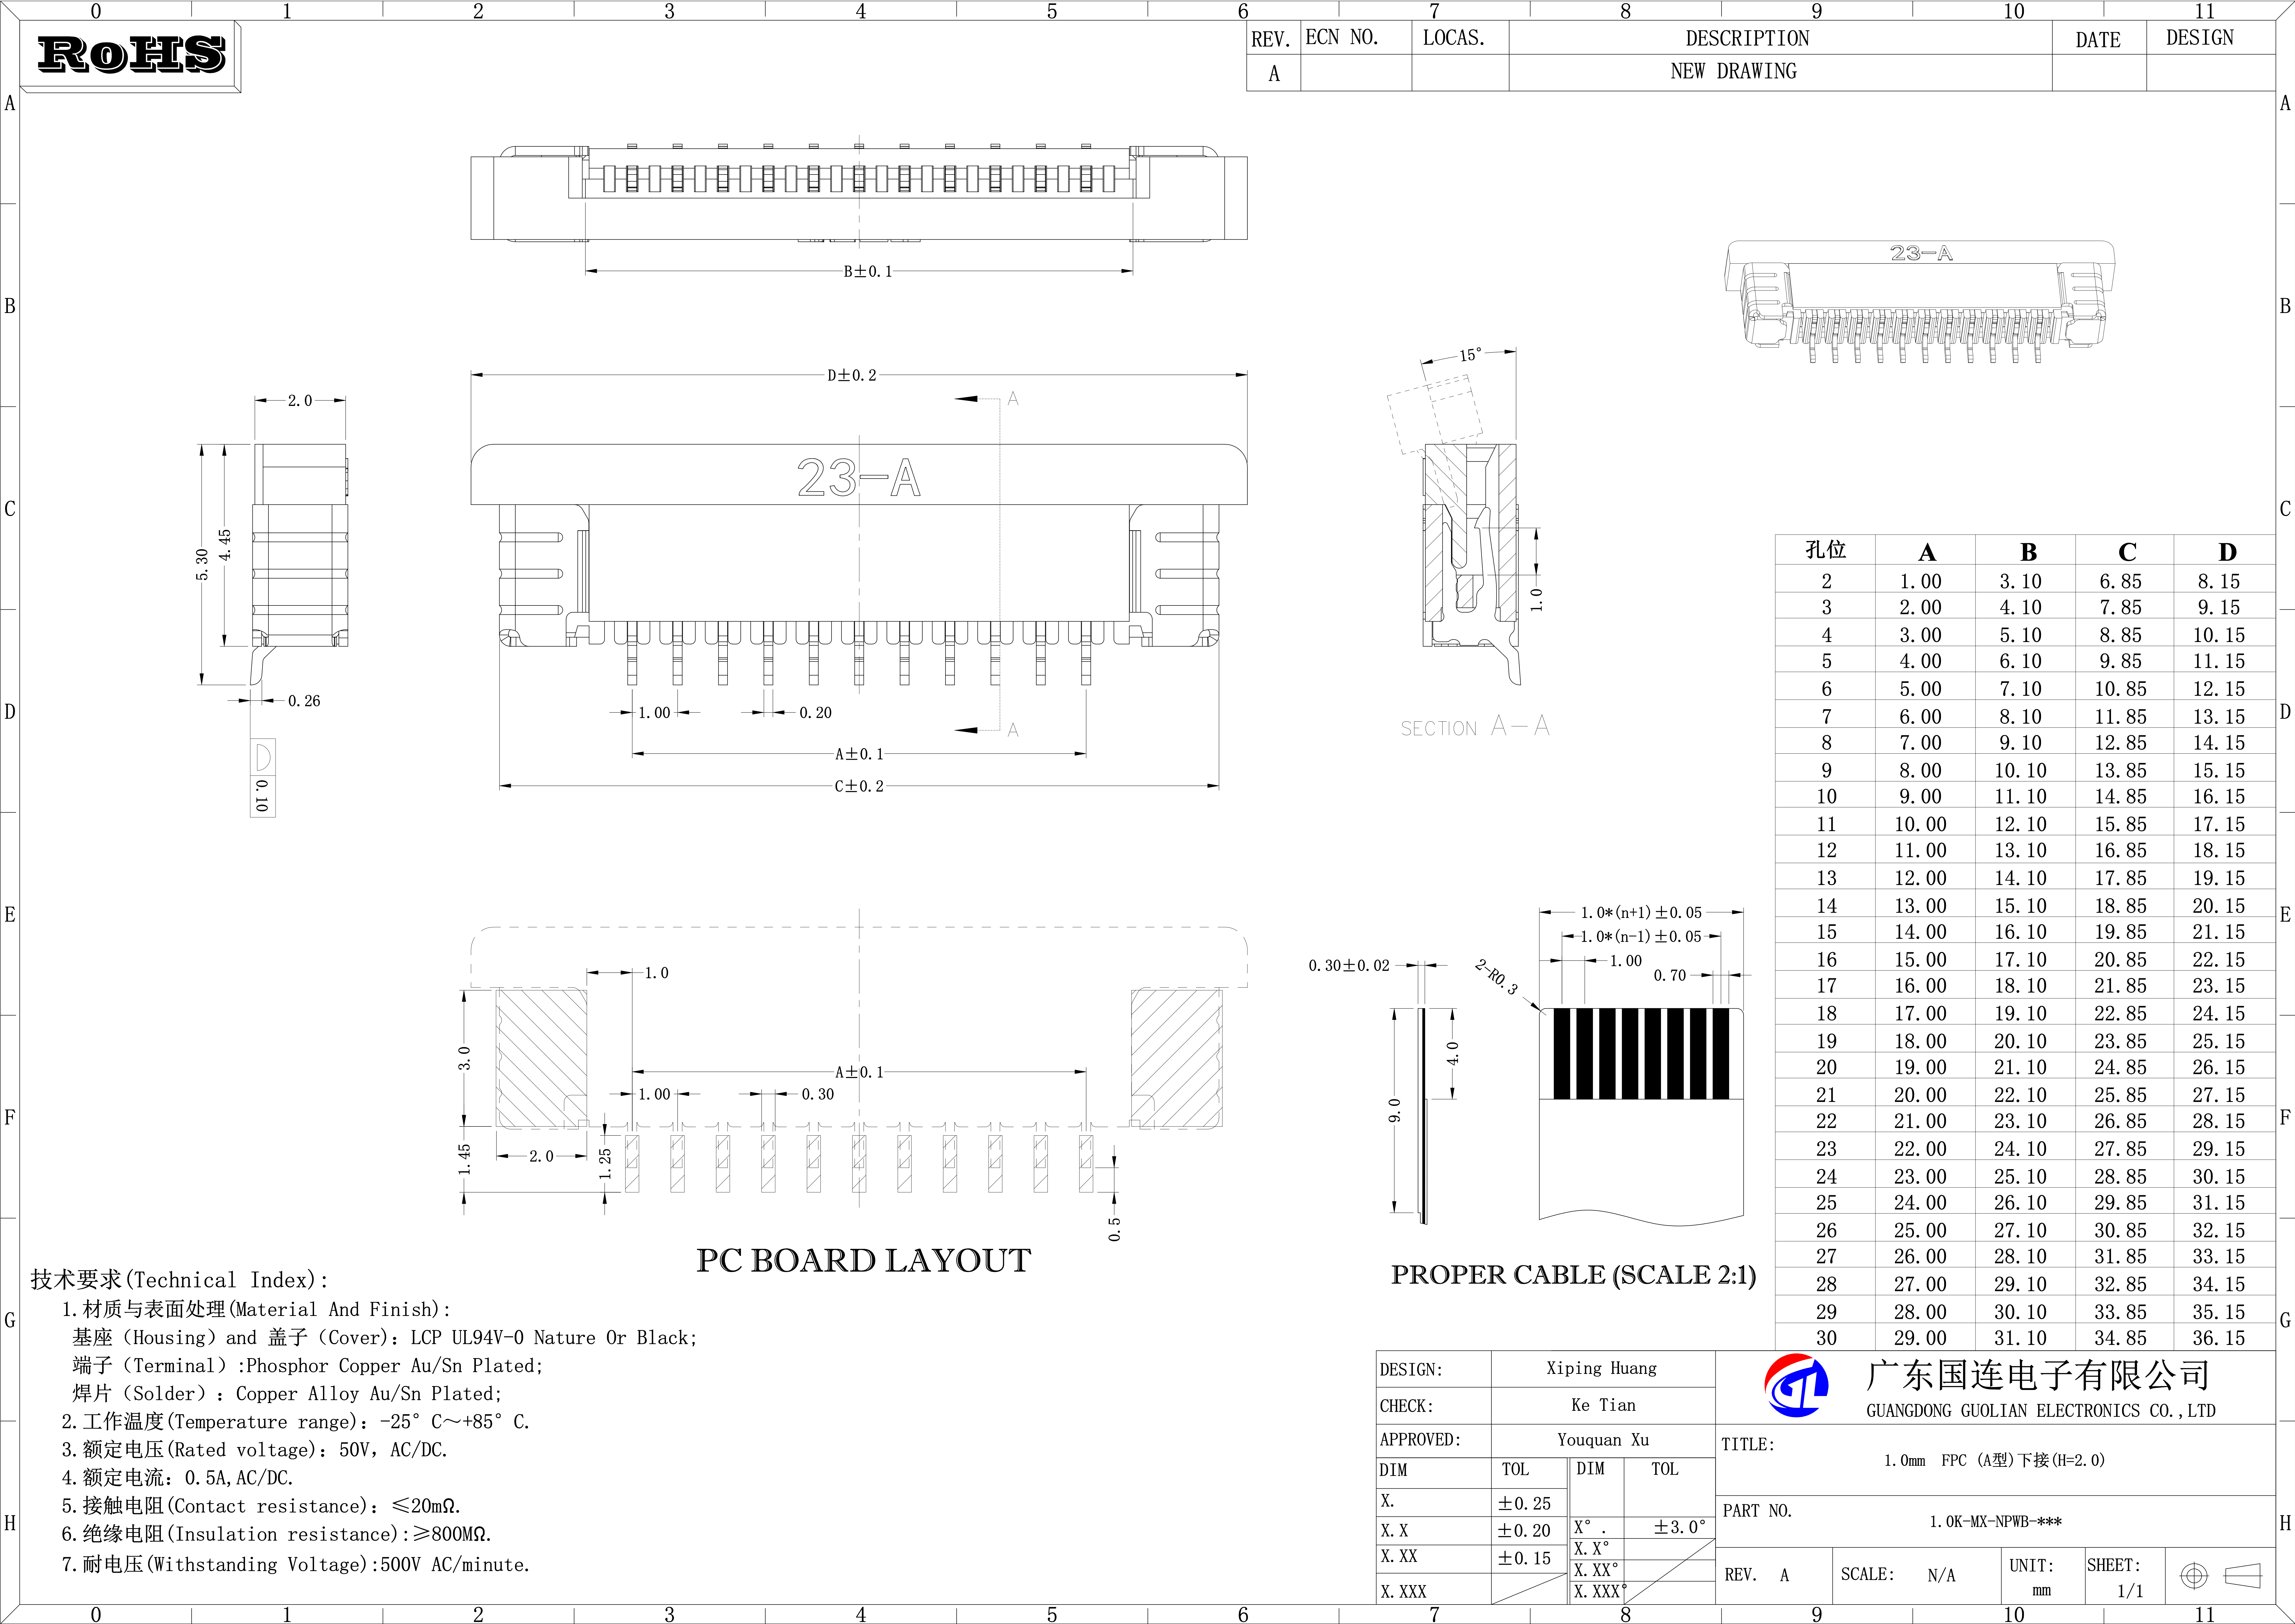
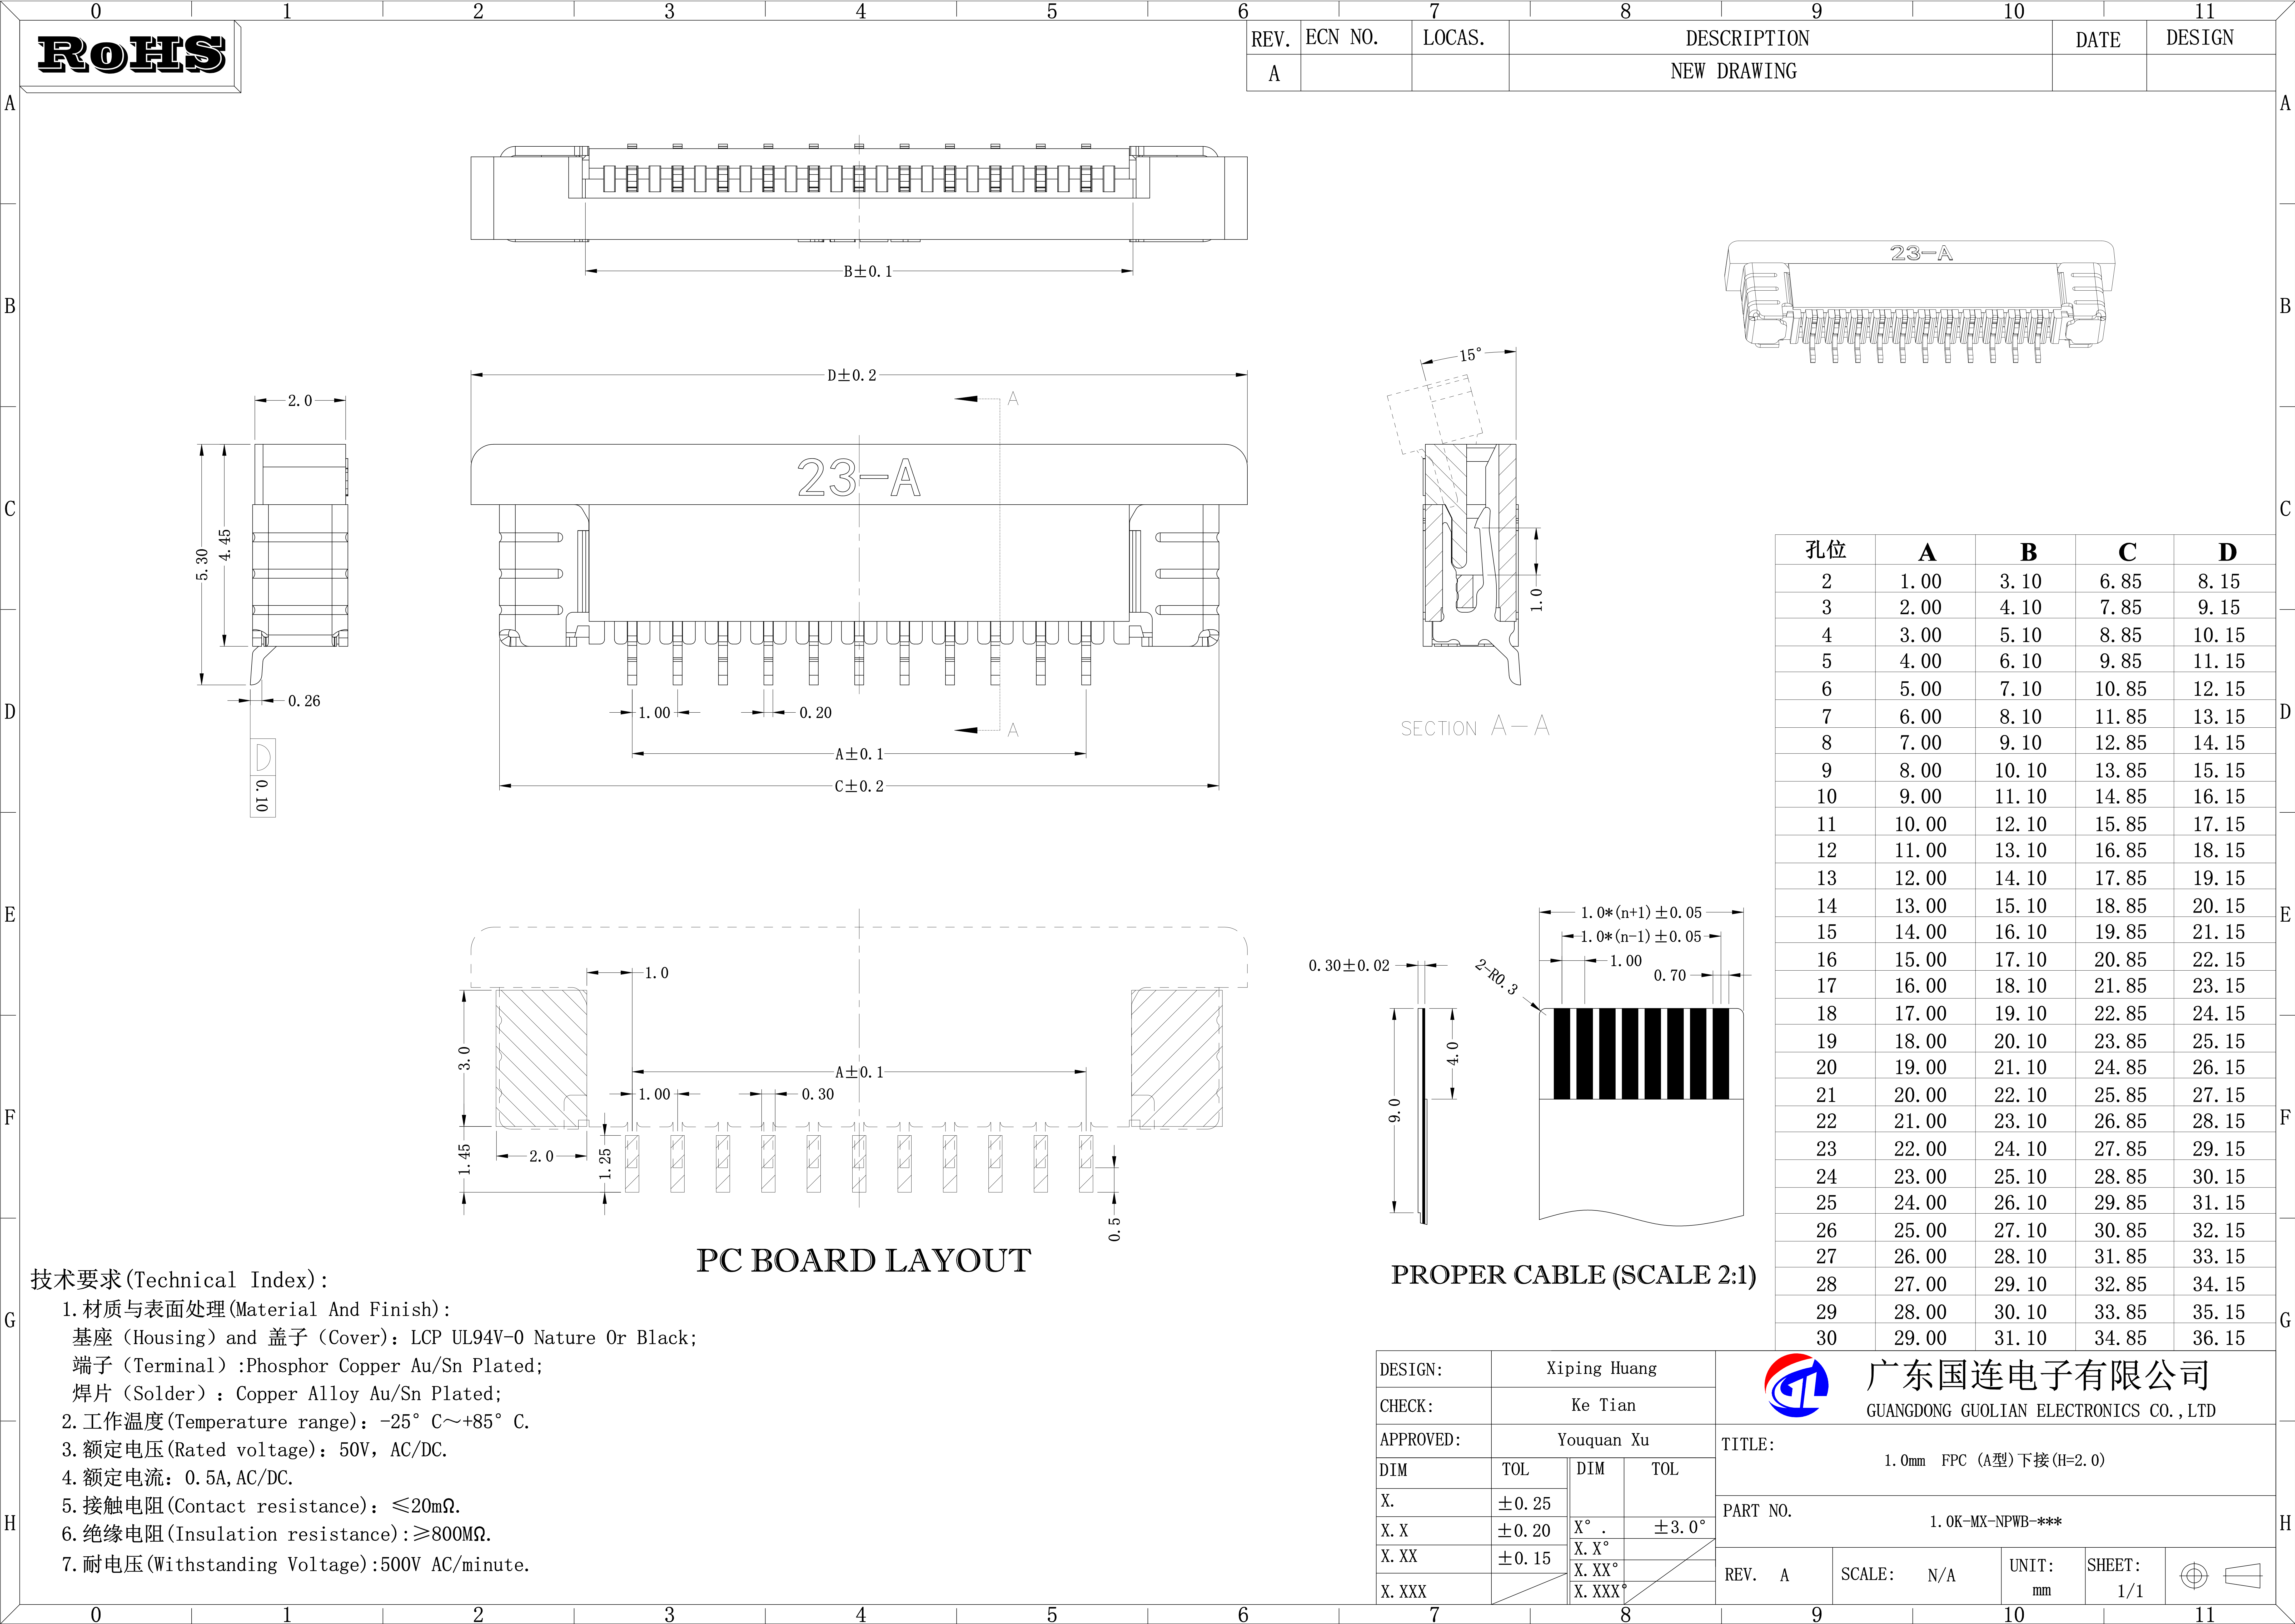
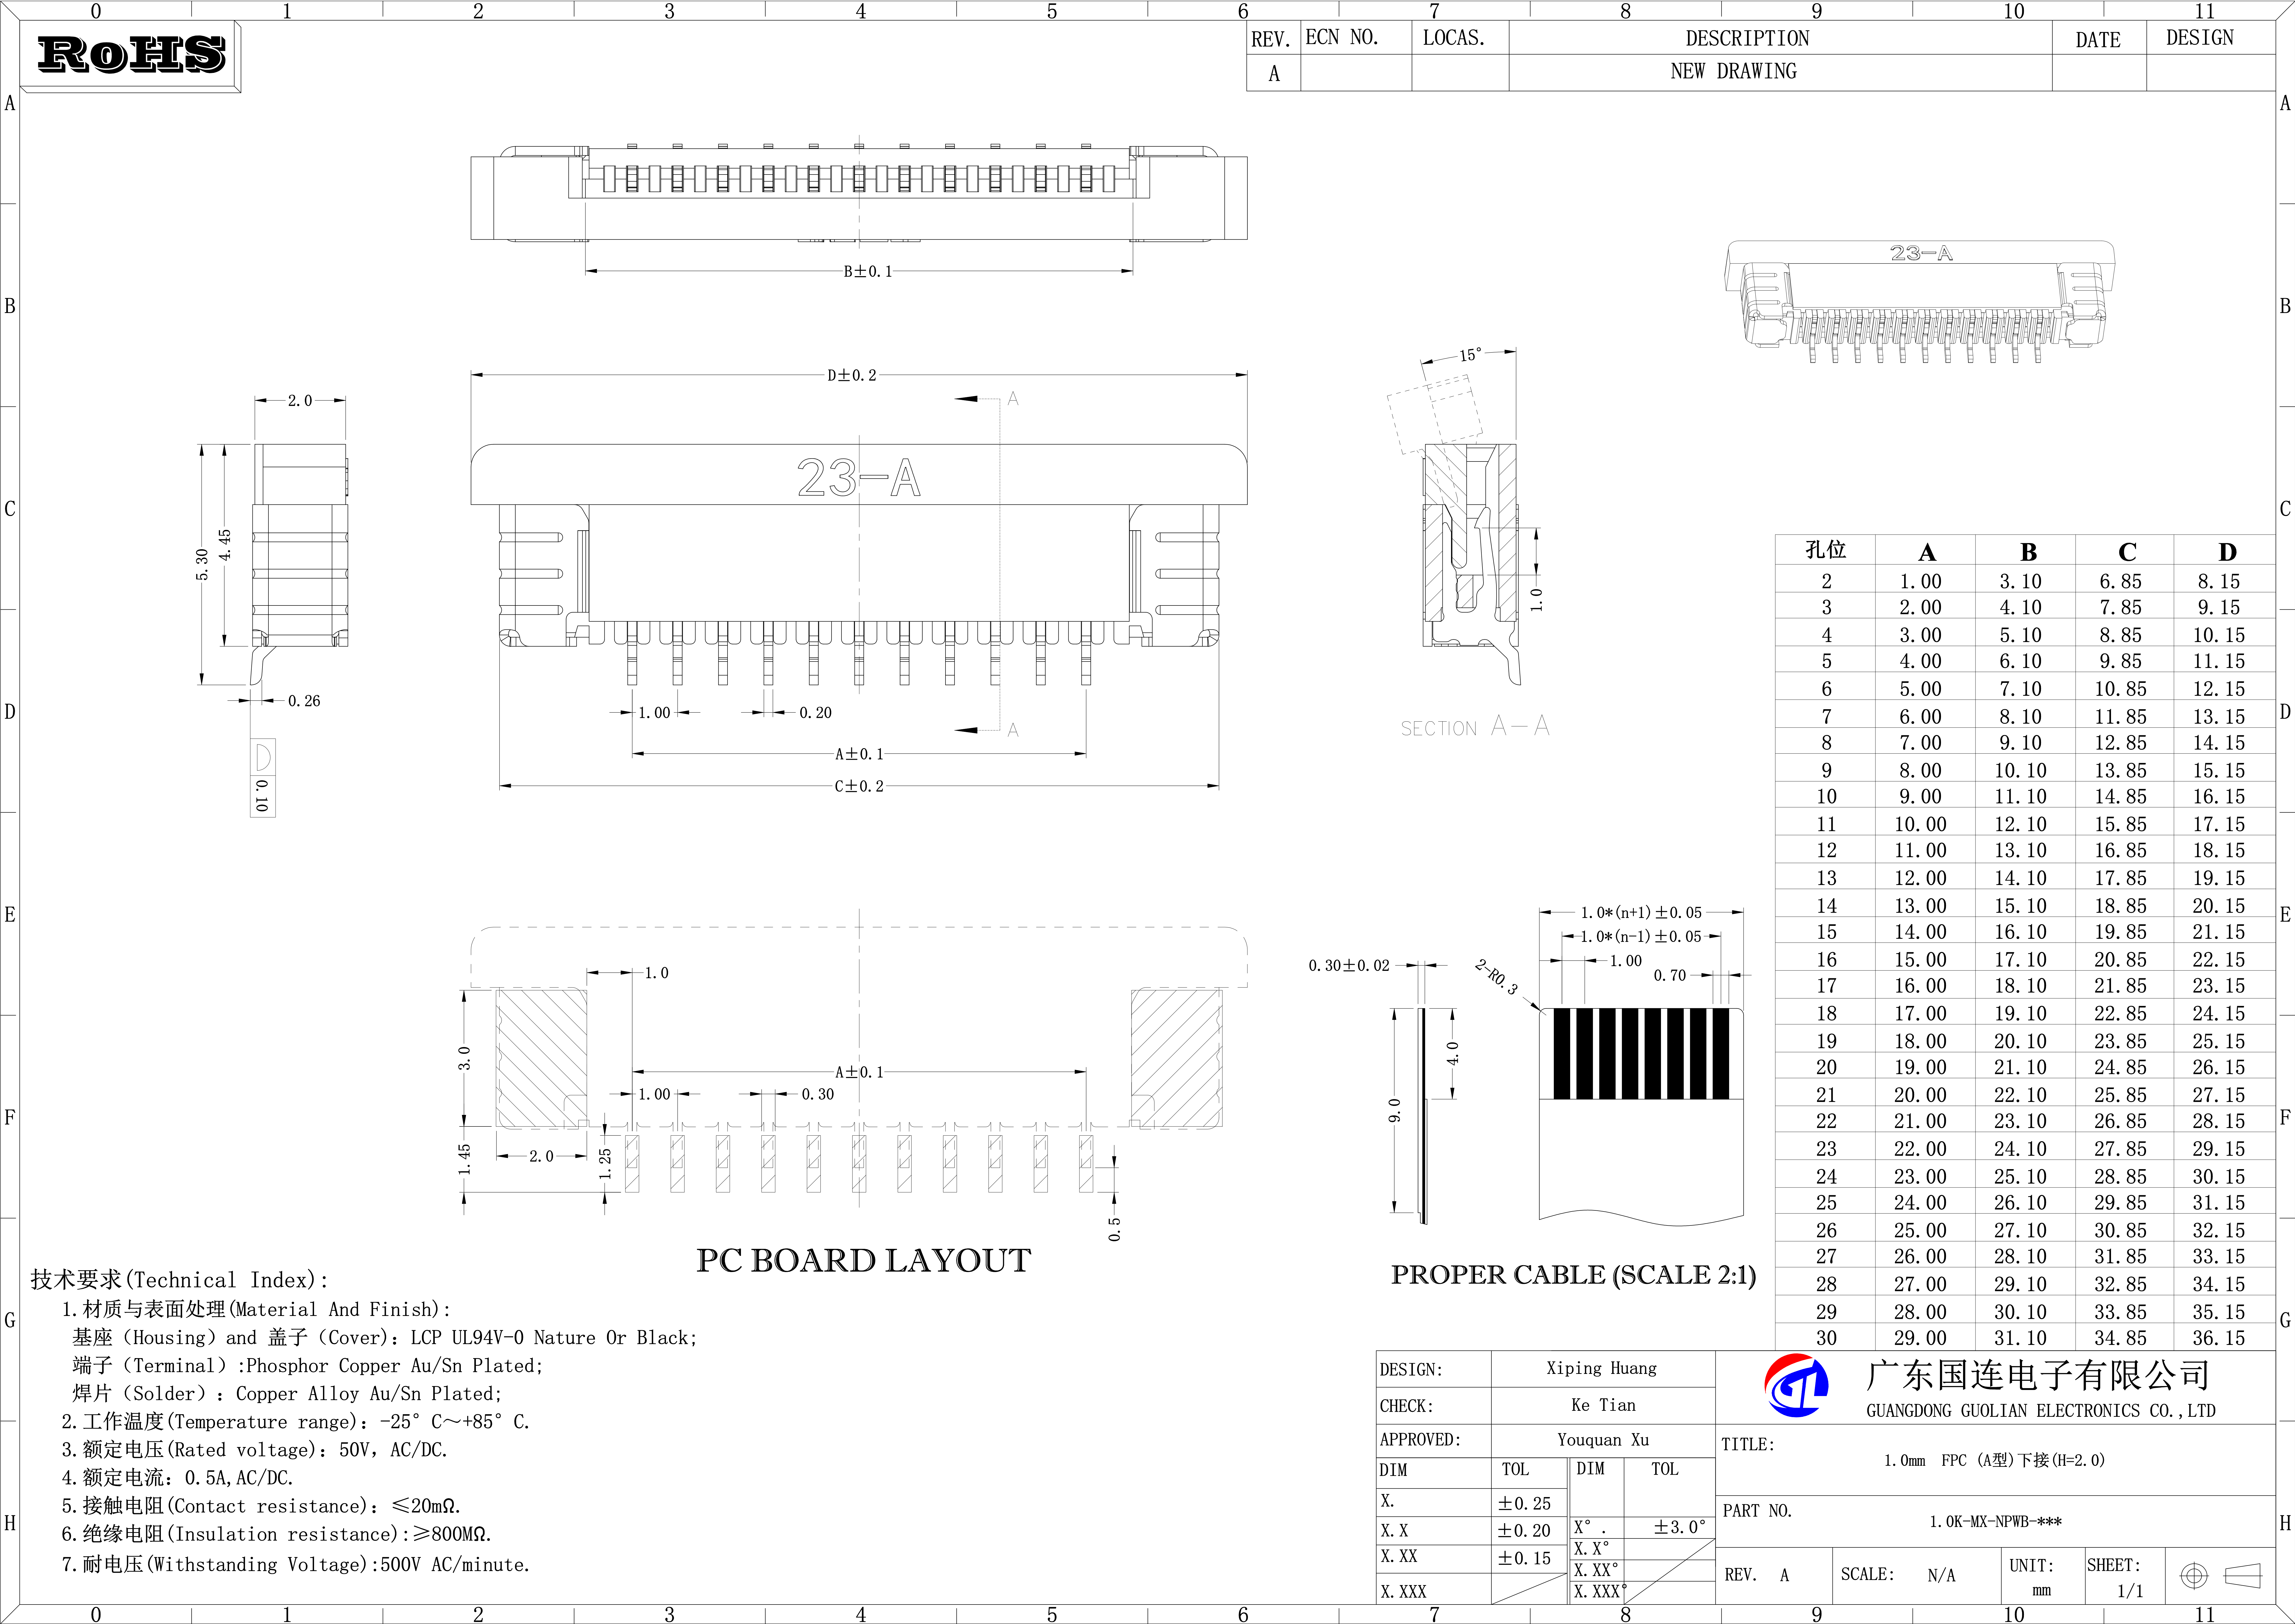
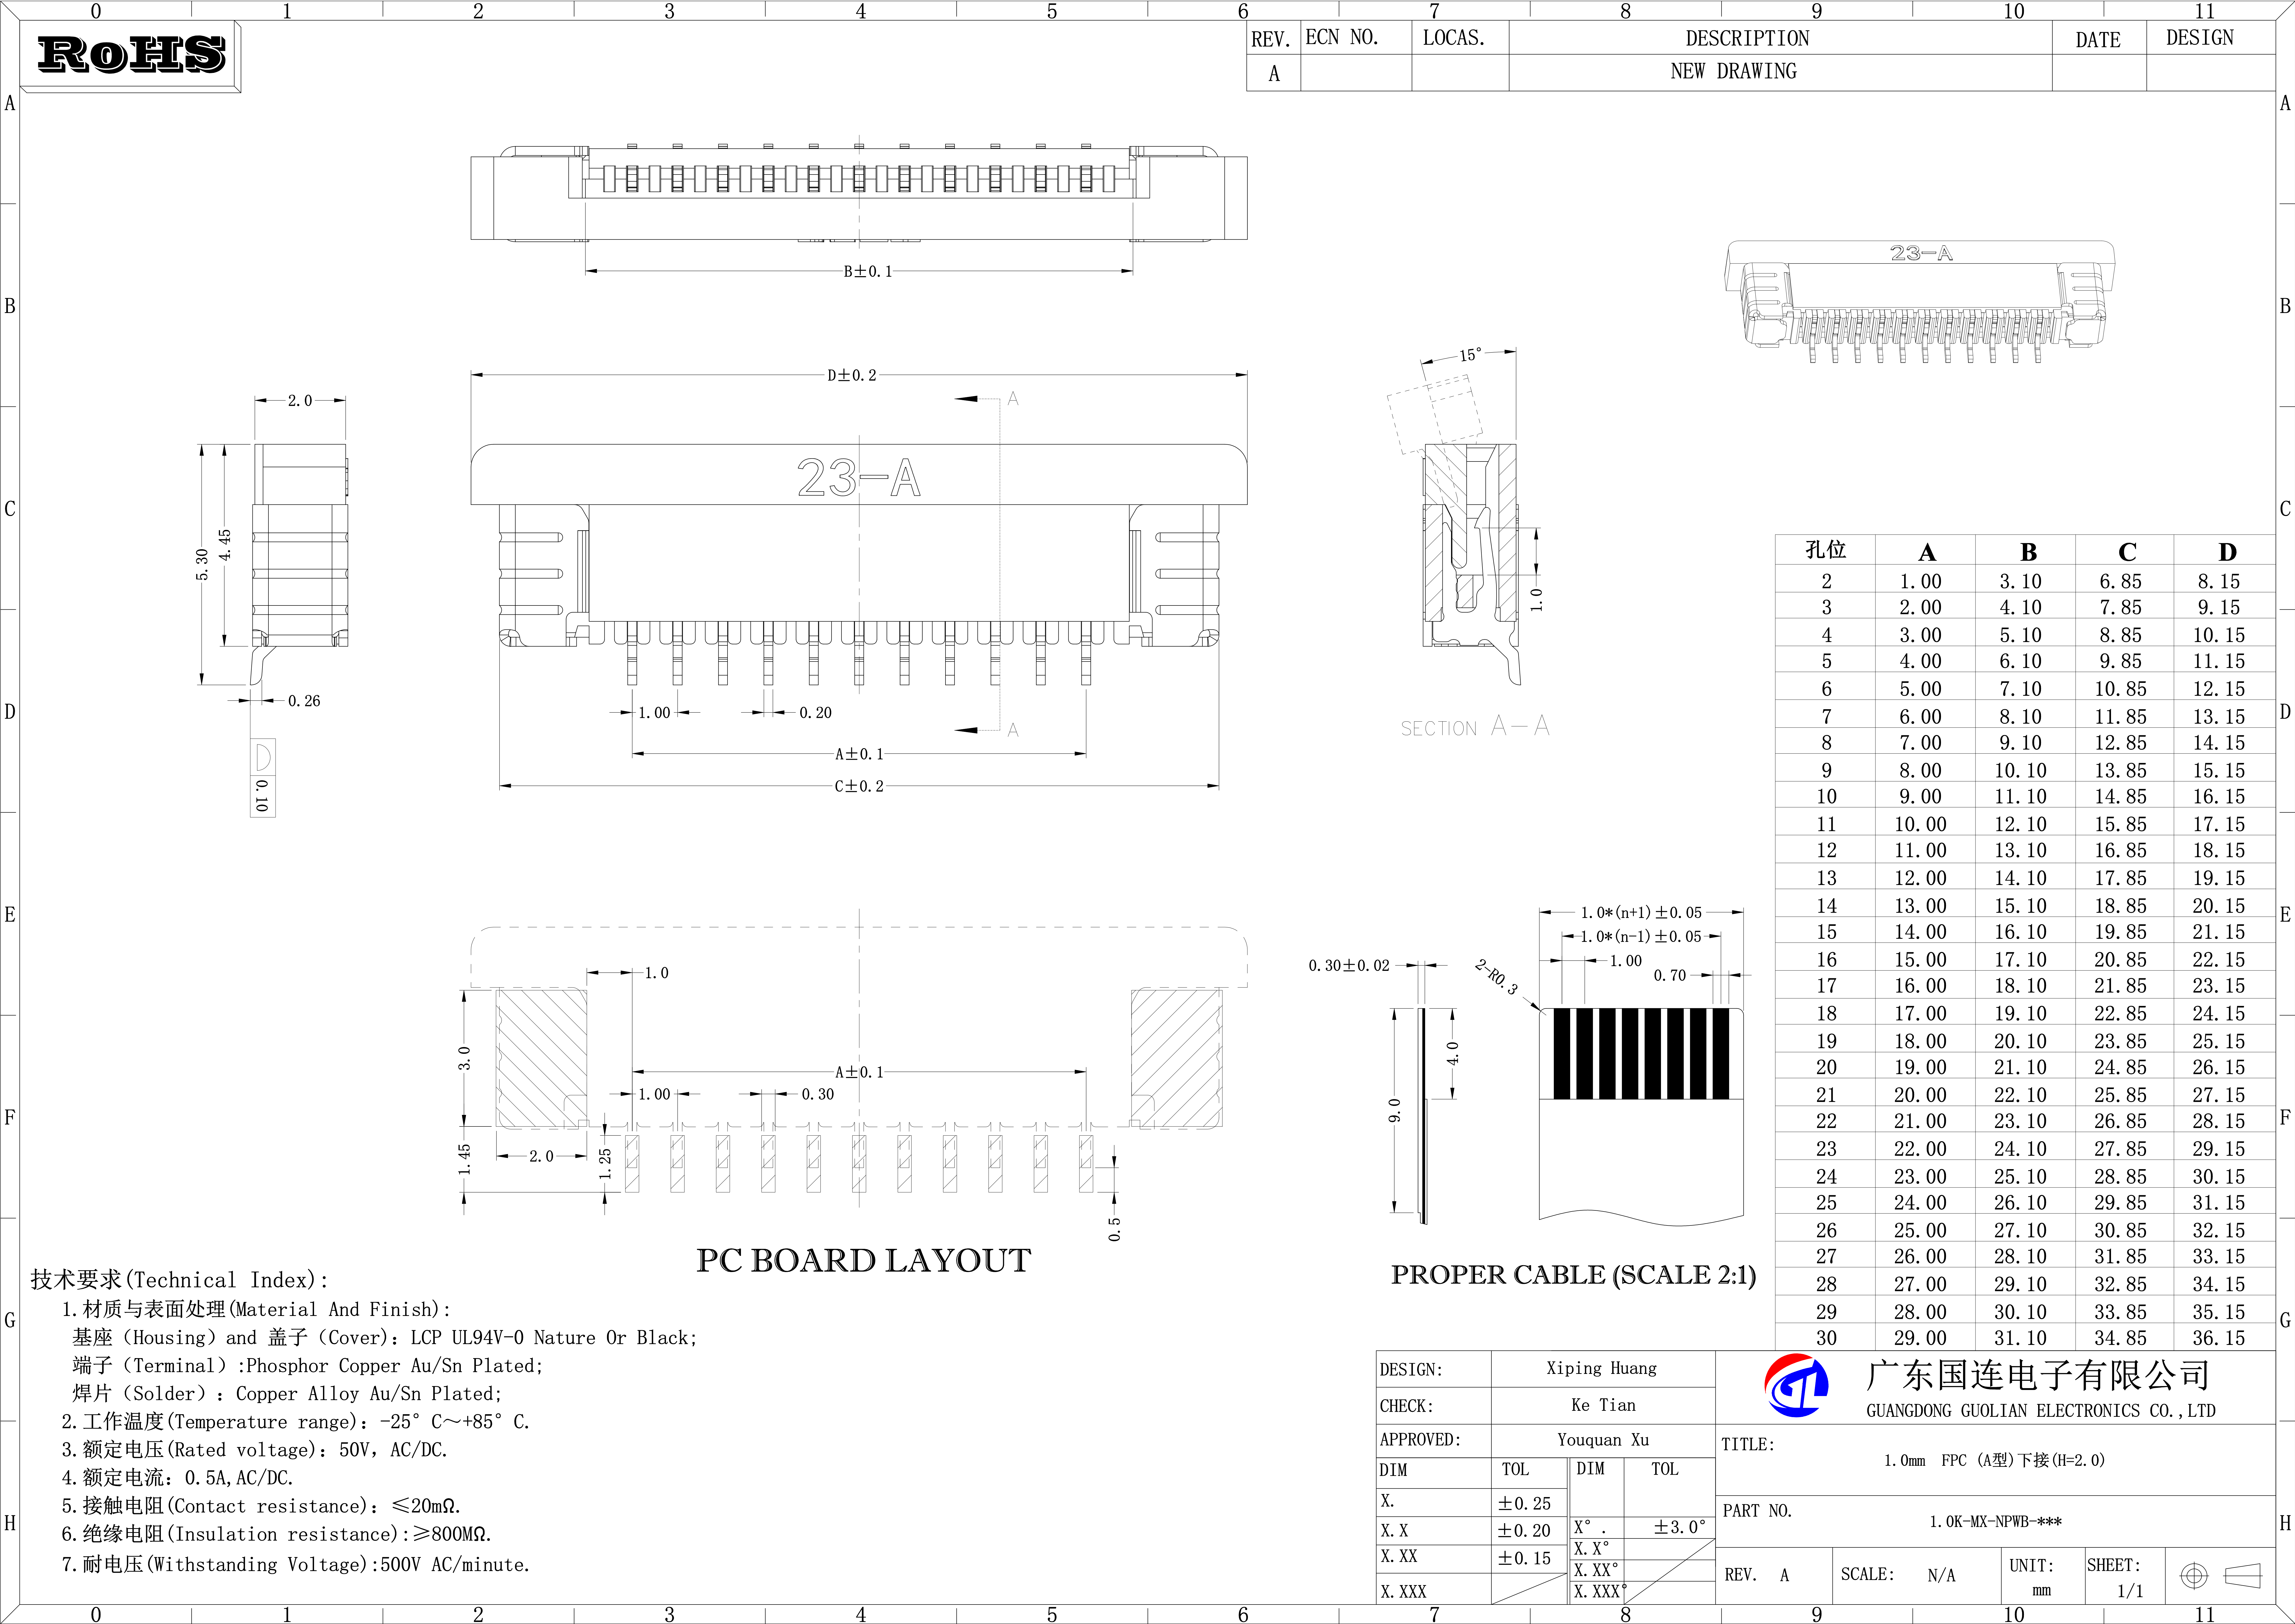


[illegible][illegible]

REV.

A

ECN NO.

LOCAS.

DESCRIPTION

NEW DRAWING

DATE

DESIGN

0

1

2

3

4

5

6

7

8

9

10

11

R
O
H

S

B±0.1

D±0.2

C±0.2

A±0.1

A

A-A

SECTION A - A

PC BOARD LAYOUT

PROPER CABLE (SCALE 2:1)

技术要求(Technical Index) :

1.材质与表面处理(Material And Finish):
基座(Housing)和盖子(Cover):LCP UL94V-0 Nature Or Black;
端子(Terminal):Phosphor Copper Au/Sn Plated;
焊片(Solder) :Copper Alloy Au/Sn Plated;

2.工作温度(Temperature range): −25° C~+85° C.

3.额定电压(Rated voltage): 50V, AC/DC.

4.额定电流: 0.5A, AC/DC.

5.接触电阻(Contact resistance): ≤20mΩ.

6.绝缘电阻(Insulation resistance): ≥800MΩ.

7.耐电压(Withstanding Voltage):500V AC/minute.

DESIGN:

Xiping Huang

CHECK:

Ke Tian

APPROVED:

Youquan Xu

TITLE:

1. 0mm FPC (A型)下接(H=2.0)

PART NO.

1. 0K-MX-NPWB-***

REV.

A

SCALE:

N/A

UNIT:

mm

SHEET:

1/1

DIM

TOL

DIM

TOL

X.

±0.25

X°. X°

±3.0°

X.X

±0.20

X.X°


X.XX

±0.15

X.XX°

X.XXX

X.XXX°

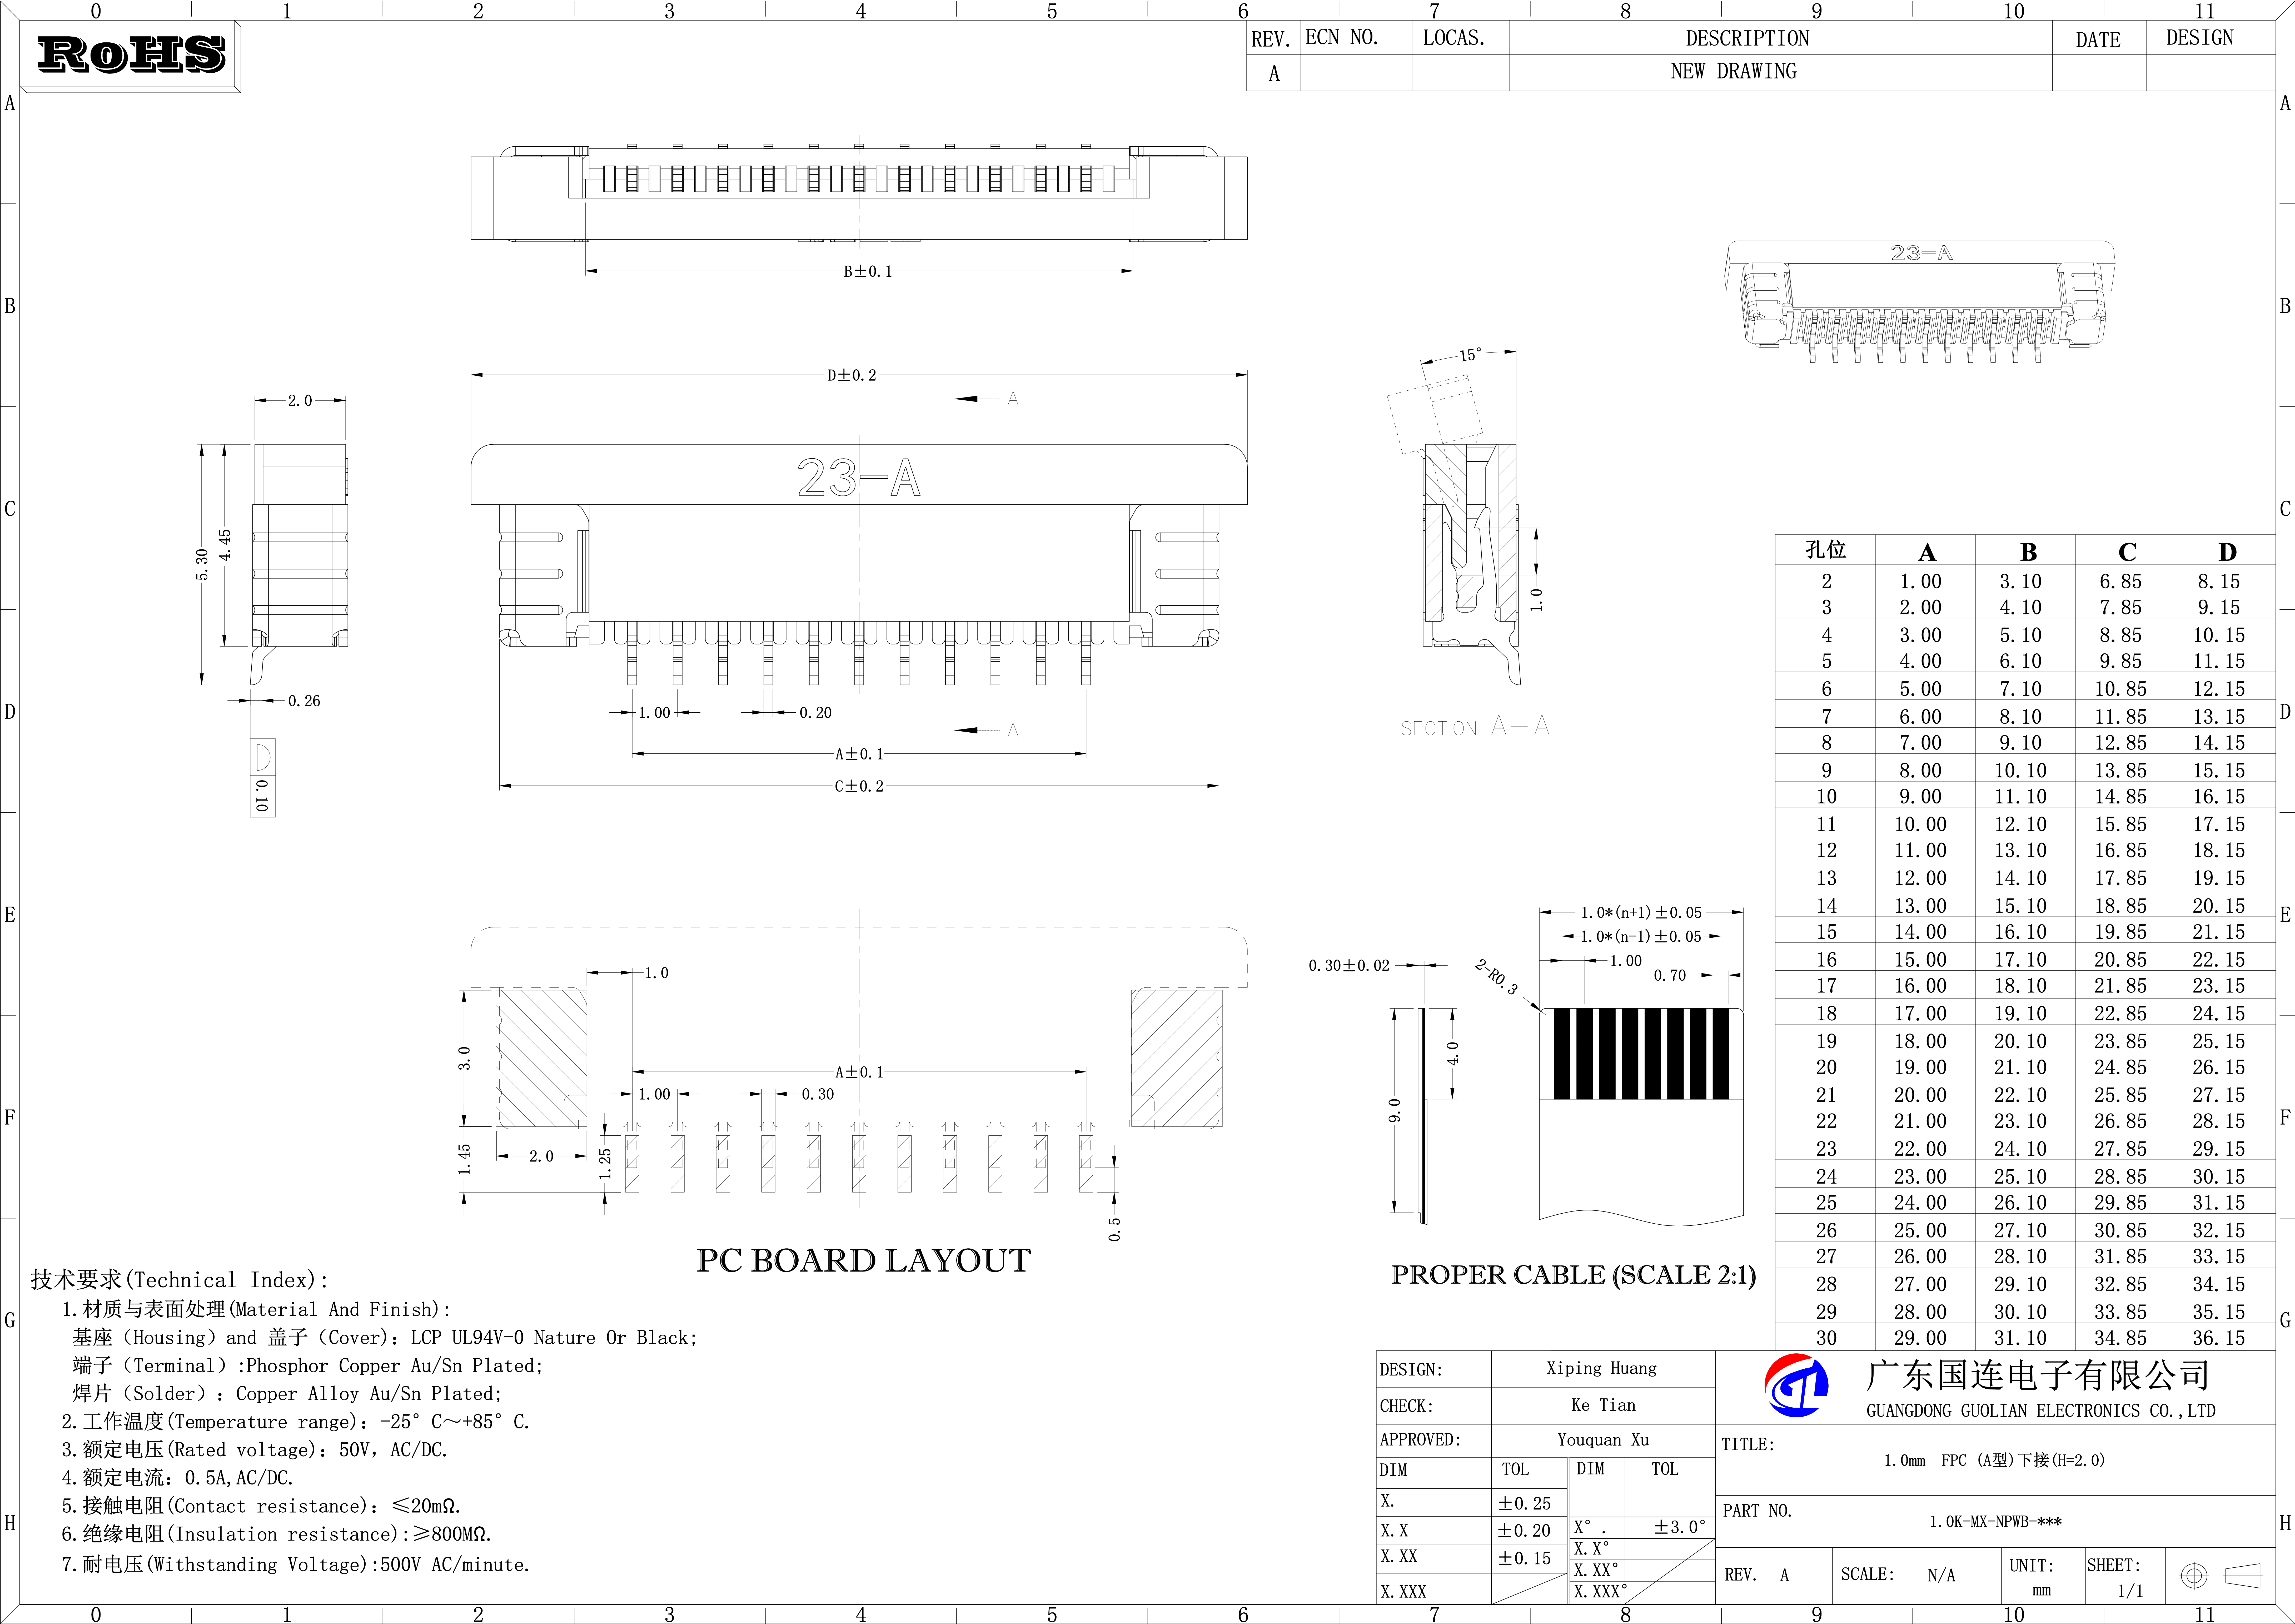[illegible][illegible]

- [illegible]

[illegible]