
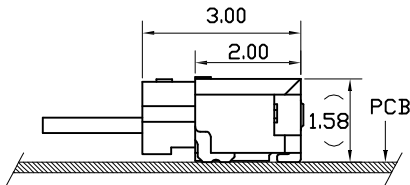
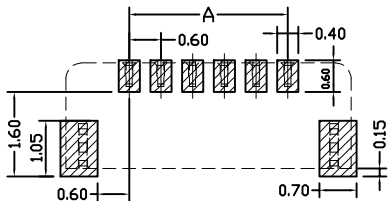




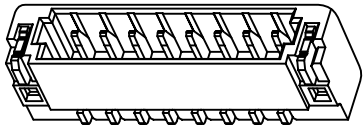


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		



Recommended P.C.B Layout
General Tolerance±0.05

Mated Condition

Specification

- Voltage Rating : 30V AC/DC
- Current Rating : 0.2A AC/DC
- Withstanding Voltage : 200V AC /minute
- Insulation Resistance : ≥100MΩ
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : ≤30mΩ
- After Environmental Testing: ≤4 0mΩ
- Suitable Wire/Cable:AWG #34 to #36,OD:0.32 to 0.29mm

Ordering Information

- 1.A0601:Series No.
- 2.Category:W-Wafer
- 3.Soldering PCB Angle:R-Right angle/90°
- 4.Soldering method:S-SMD/SMT, Surface Mount Technology
- 5.Number of rows&pins:XX
- 6.Plug the pin & Special No.:Blank-Ordinary
- 7.Material(Insulators):LP-LCP,UL94V-0
- 8.Color:Blank-Natural;BK-Black
- 9.Environmental protection Standard:Blank-Ordinary
- RoHS;HF-Halogen Free
- 10.Material(Pin):PB-Phosphor Bronze
- 11.Plating :SN-Bright Tin Plated;AU-Gold flash;AU3-Gold 3U"
- 12.Package:Blank-Tape&Reel, SPQ:4.5K/reel preferred

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	0.60	3.00	12	6.60	9.00
03	1.20	3.60	13	7.20	9.60
04	1.80	4.20	14	7.80	10.20
05	2.40	4.80	15	8.40	10.80
06	3.00	5.40	16	9.00	11.40
07	3.60	6.00	17	9.60	12.00
08	4.20	6.60	18	10.20	12.60
09	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	14.40

DESIGN:		Xiping Huang			广东国连电子有限公司				
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD				
APPROVED:		Youquan Xu		TITLE:					
DIM	TOL	DIM	TOL	0.6卧贴					
X.	±0.25			PART NO.					
X. X	±0.20	X°	±3.0°	A0601AWR-xx-R-GF					
X. XX	±0.15	X. X°		REV. A		SCALE: N/A	UNIT: mm	SHEET: 1/1	
X. XXX		X. XX°							
		X. XXX°							