

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:

- 1、所有材料符合ROHS2.0/REACH要求。
2、额定电流: 3A, AC, DC;
3、额定电压: 250V, AC, DC;
4、温度范围: -25℃~+85℃;
5、接触电阻: ≤0.02Ω;
6、绝缘电阻: ≥1000MΩ;
7、耐压: 1000V, AC/minute.
8、产品料号:







A25001 - n A - 01 T1

孔位 ———— 电镀
产品类型 ———— T1: 镀亮锡
A: 直插针座 ———— 胶芯材质
01: PA66 白色

Circuits	Dimensions (mm)		
	A	B	C
02	2.50	6.00	7.50
03	5.00	8.50	10.00
04	7.50	11.00	12.50
05	10.00	13.50	15.00
06	12.50	16.00	17.50
07	15.00	18.50	20.00
08	17.50	21.00	22.50
09	20.00	23.50	25.00
10	22.50	26.00	27.50
11	25.00	28.50	30.00
12	27.50	31.00	32.50
13	30.00	33.50	35.00
14	32.50	36.00	37.50
15	35.00	38.50	40.00
16	37.50	41.00	42.50

2	端子 Contact	黄铜 Brass	n×1	电镀(锡): 整个表面镀亮锡30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	PA66 (UL94V-0)	1	白色
序号	名称	材料	数量	附注

DESIGN:		Xiping Huang			广东国连电子有限公司					
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD					
APPROVED:		Youquan Xu		TITLE:						
DIM	TOL	DIM	TOL	XH2. 5直针						
X.	±0.25			PART NO.						
X. X	±0.20	X°	±3.0°							
X. XX	±0.15	X. X°		A25001-na-01T1						
X. XXX		X. XX°								
		X. XXX°		REV.	A	SCALE:	N/A	UNIT:	SHEET:	
								mm	1/1	

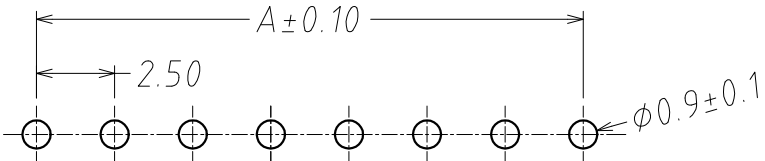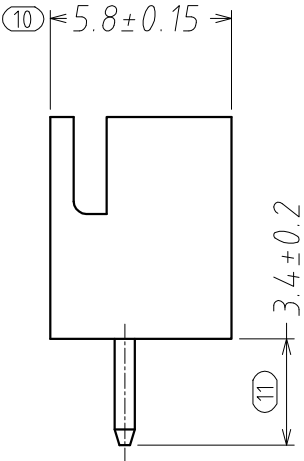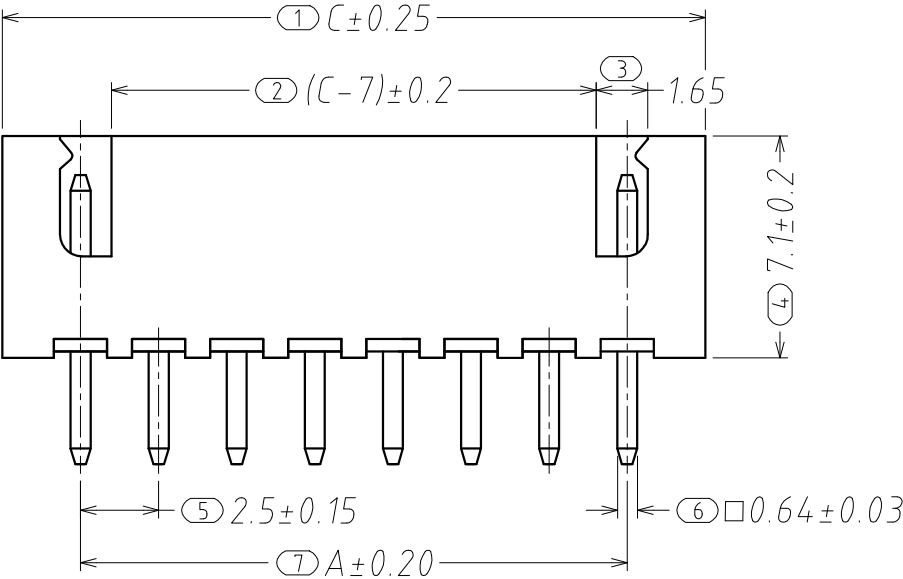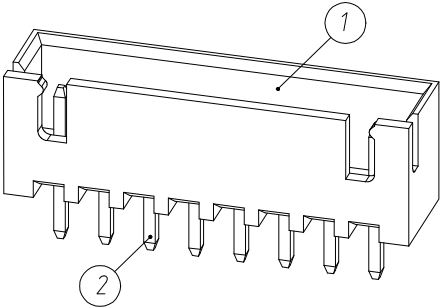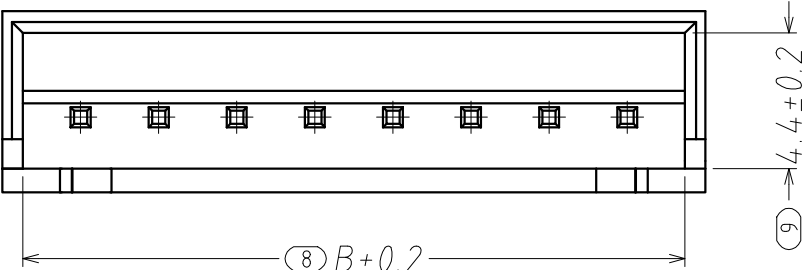

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)