





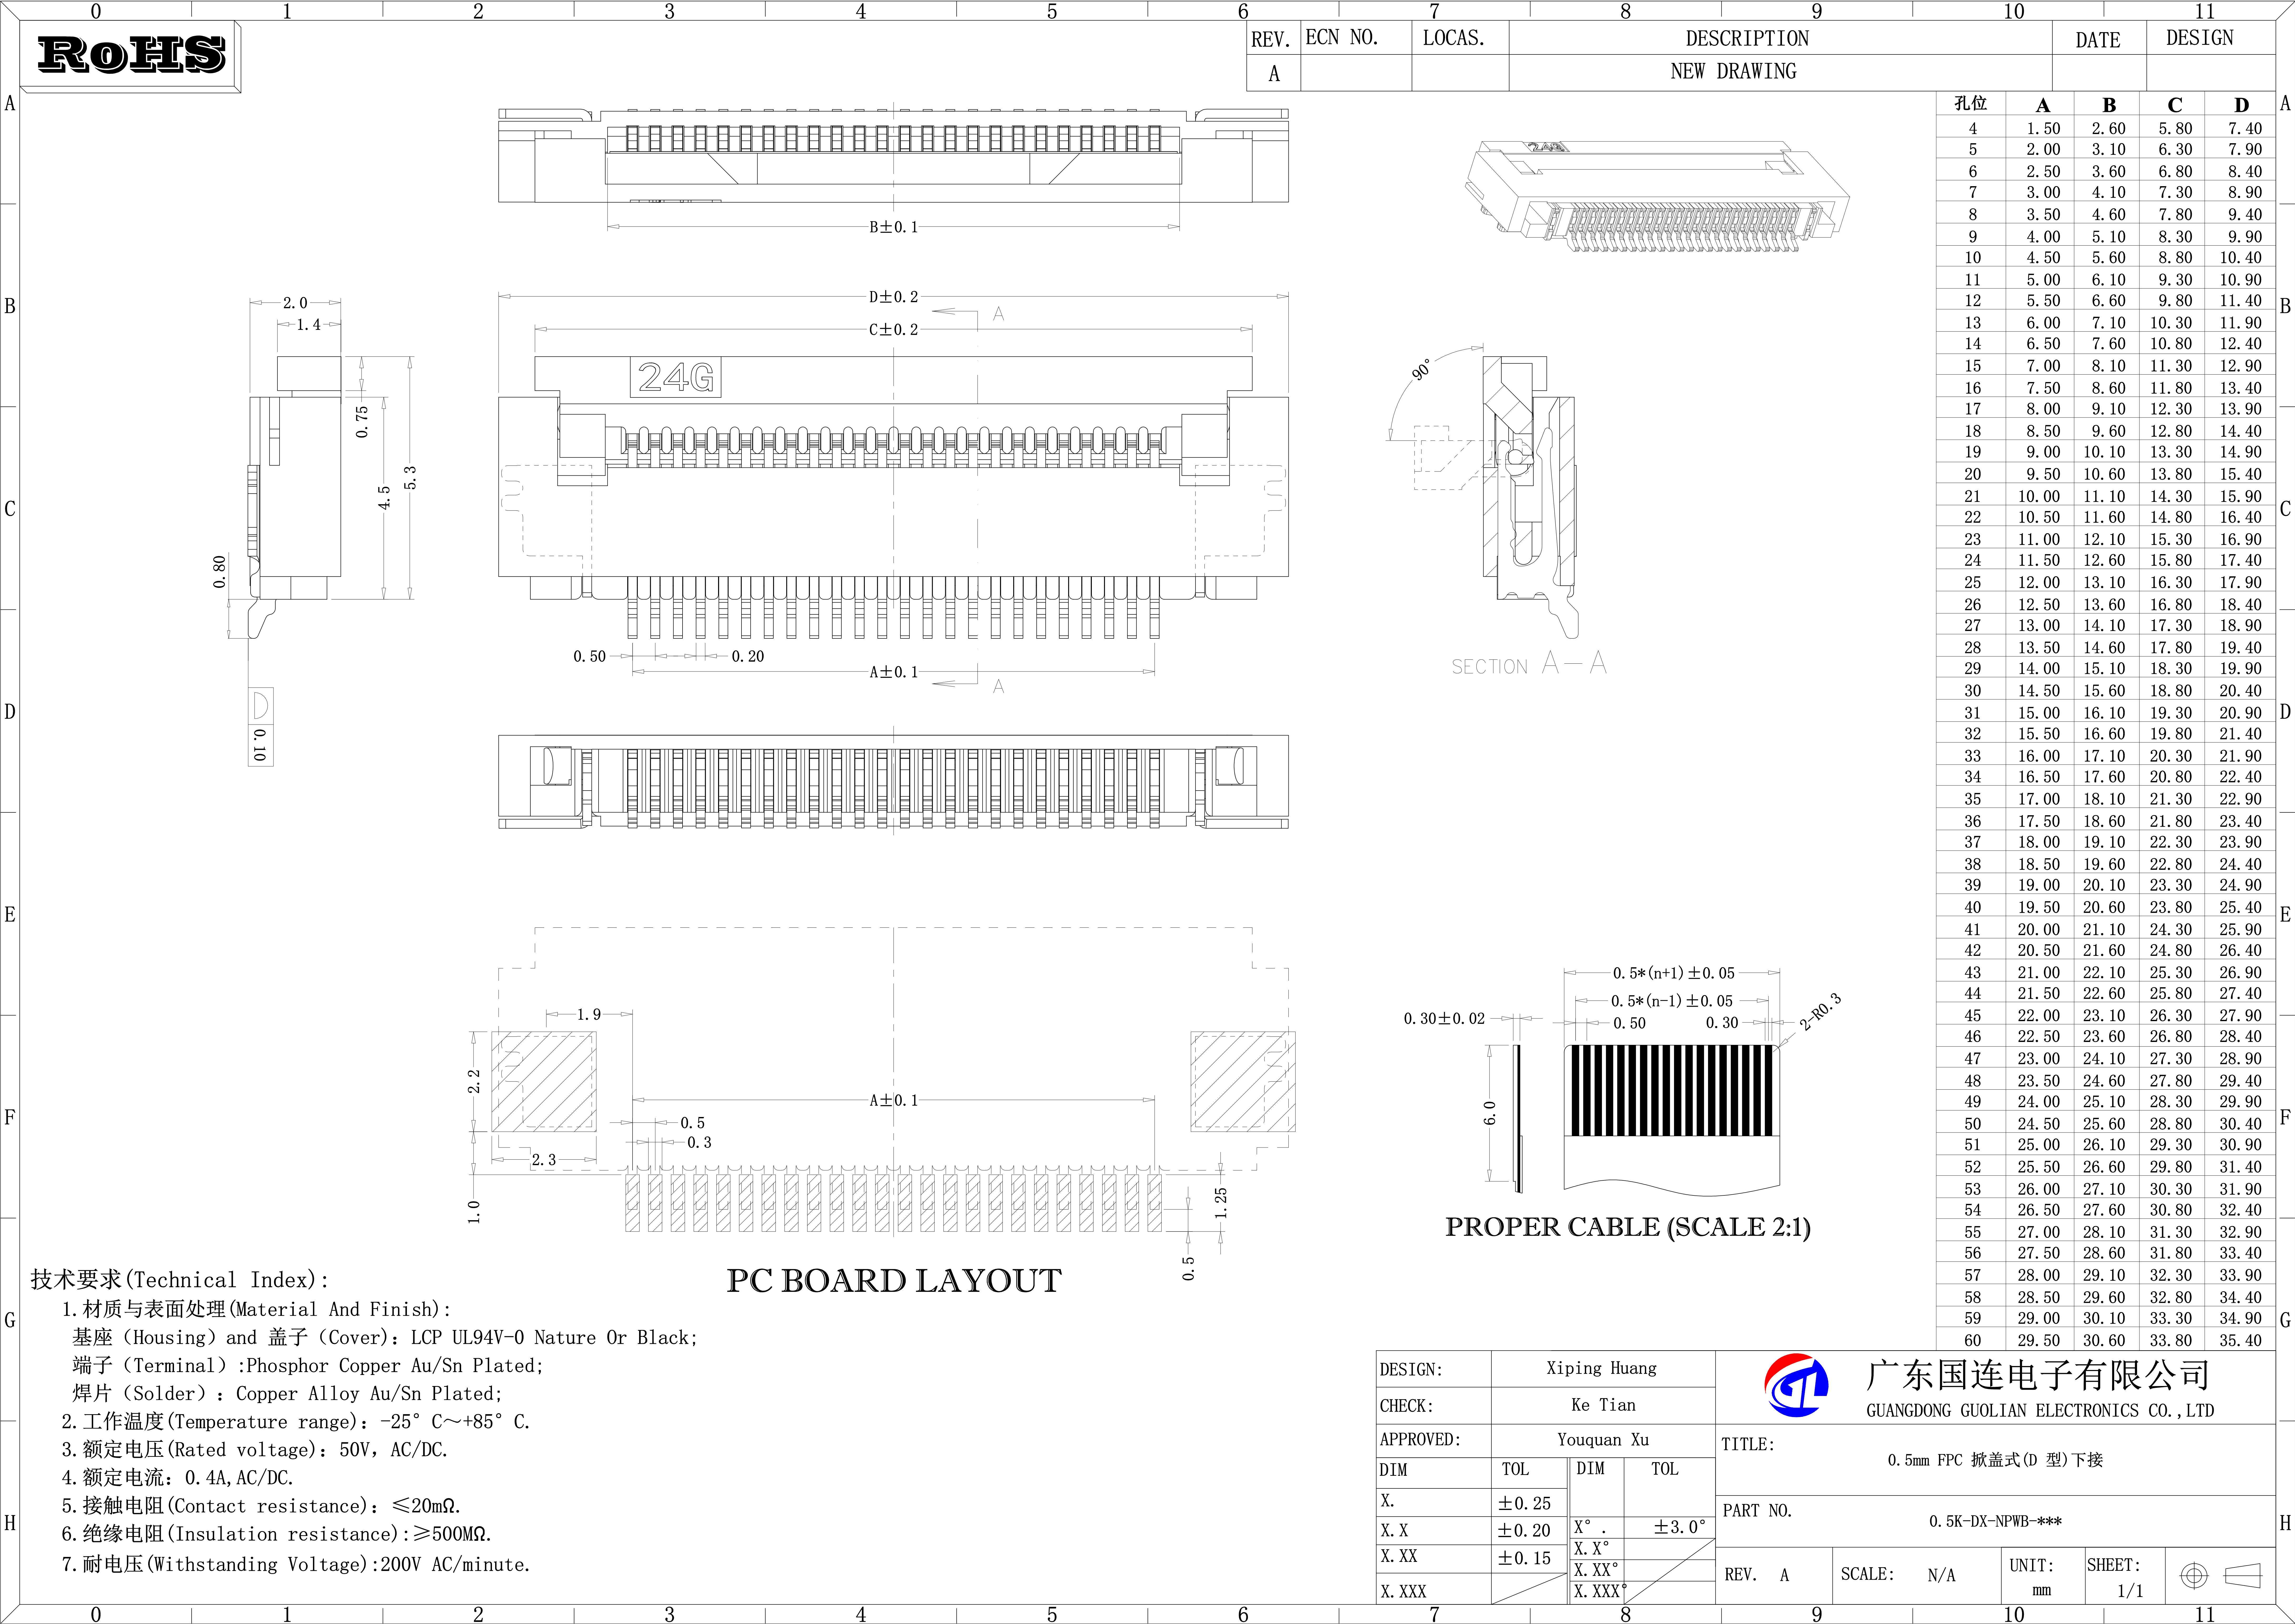

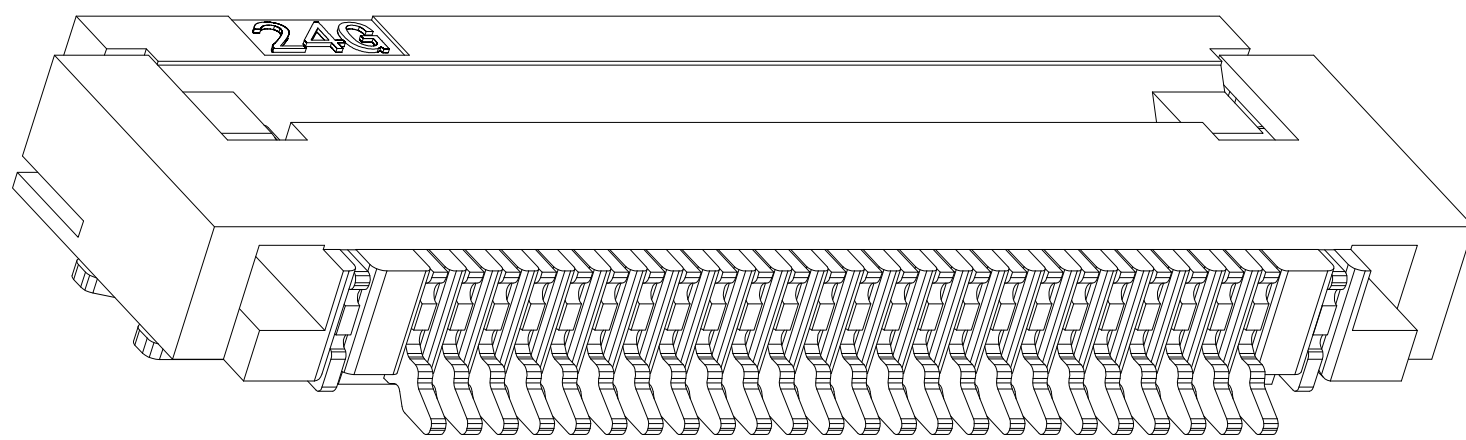

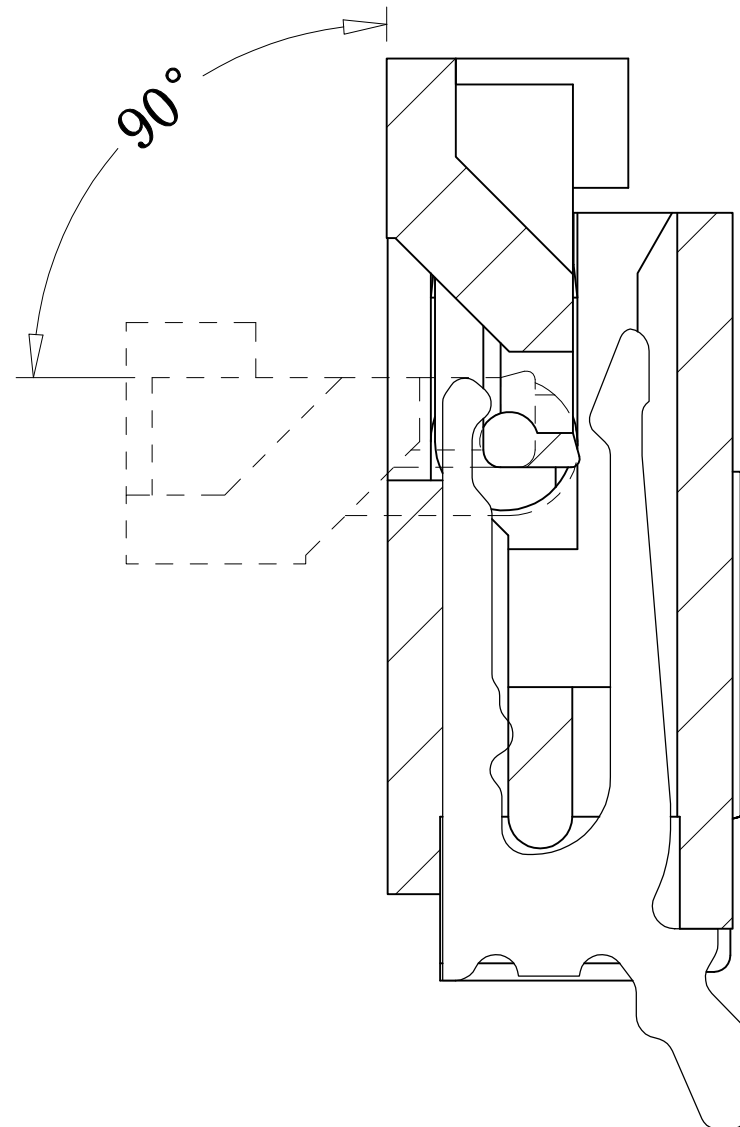

SECTION A—A

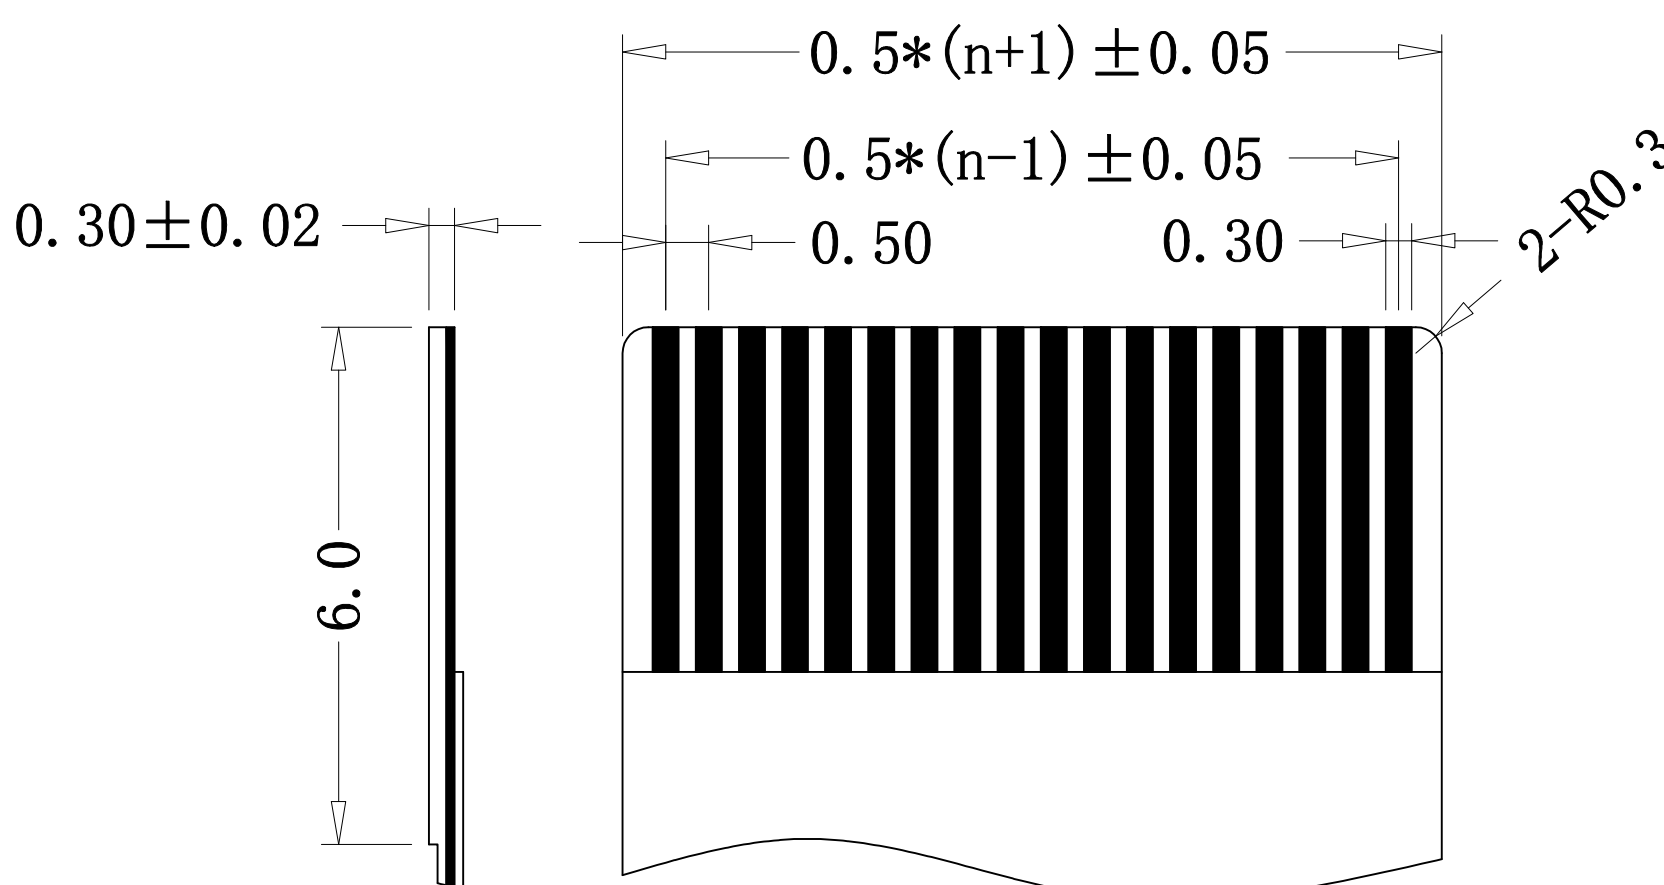

0.30 ± 0.02

6.0

0.5*(n+1) ± 0.05

0.5*(n-1) ± 0.05


0.50

0.30

2-R0.3

PROPER CABLE (SCALE 2:1)

孔位	A	B	C	D	
4	1.50	2.60	5.80	7.40	A
5	2.00	3.10	6.30	7.90	
6	2.50	3.60	6.80	8.40	
7	3.00	4.10	7.30	8.90	B
8	3.50	4.60	7.80	9.40	
9	4.00	5.10	8.30	9.90	
10	4.50	5.60	8.80	10.40	
11	5.00	6.10	9.30	10.90	
12	5.50	6.60	9.80	11.40	
13	6.00	7.10	10.30	11.90	C
14	6.50	7.60	10.80	12.40	
15	7.00	8.10	11.30	12.90	
16	7.50	8.60	11.80	13.40	
17	8.00	9.10	12.30	13.90	
18	8.50	9.60	12.80	14.40	
19	9.00	10.10	13.30	14.90	D
20	9.50	10.60	13.80	15.40	
21	10.00	11.10	14.30	15.90	
22	10.50	11.60	14.80	16.40	E
23	11.00	12.10	15.30	16.90	
24	11.50	12.60	15.80	17.40	
25	12.00	13.10	16.30	17.90	
26	12.50	13.60	16.80	18.40	
27	13.00	14.10	17.30	18.90	
28	13.50	14.60	17.80	19.40	F
29	14.00	15.10	18.30	19.90	
30	14.50	15.60	18.80	20.40	
31	15.00	16.10	19.30	20.90	G
32	15.50	16.60	19.80	21.40	
33	16.00	17.10	20.30	21.90	
34	16.50	17.60	20.80	22.40	
35	17.00	18.10	21.30	22.90	
36	17.50	18.60	21.80	23.40	
37	18.00	19.10	22.30	23.90	G
38	18.50	19.60	22.80	24.40	
39	19.00	20.10	23.30	24.90	
40	19.50	20.60	23.80	25.40	
41	20.00	21.10	24.30	25.90	
42	20.50	21.60	24.80	26.40	
43	21.00	22.10	25.30	26.90	F
44	21.50	22.60	25.80	27.40	
45	22.00	23.10	26.30	27.90	
46	22.50	23.60	26.80	28.40	
47	23.00	24.10	27.30	28.90	
48	23.50	24.60	27.80	29.40	
49	24.00	25.10	28.30	29.90	G
50	24.50	25.60	28.80	30.40	
51	25.00	26.10	29.30	30.90	
52	25.50	26.60	29.80	31.40	
53	26.00	27.10	30.30	31.90	
54	26.50	27.60	30.80	32.40	
55	27.00	28.10	31.30	32.90	G
56	27.50	28.60	31.80	33.40	
57	28.00	29.10	32.30	33.90	
58	28.50	29.60	32.80	34.40	
59	29.00	30.10	33.30	34.90	
60	29.50	30.60	33.80	35.40	

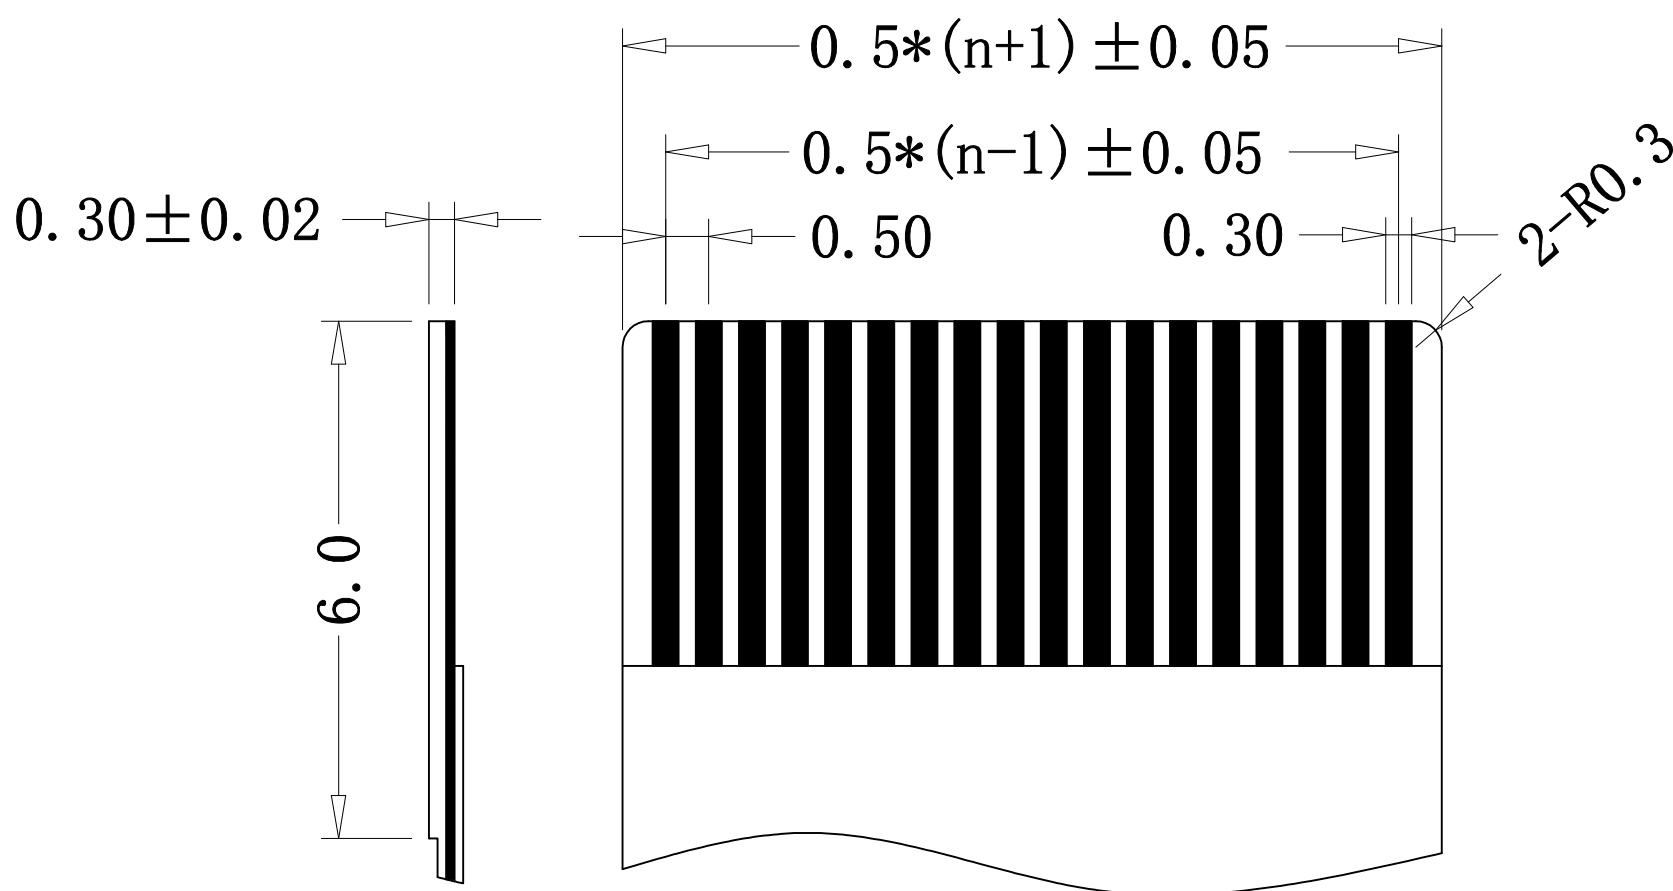

G	技术要求(Technical Index): 1. 材质与表面处理(Material And Finish): 基座 (Housing) and 盖子 (Cover): LCP UL94V-0 Nature Or Black; 端子 (Terminal) :Phosphor Copper Au/Sn Plated; 焊片 (Solder) : Copper Alloy Au/Sn Plated;	PC BOARD LAYOUT
	2. 工作温度(Temperature range): -25° C~+85° C. 3. 额定电压(Rated voltage): 50V, AC/DC. 4. 额定电流: 0. 4A, AC/DC.	
H	5. 接触电阻(Contact resistance): $\leq 20\text{m}\Omega$. 6. 绝缘电阻(Insulation resistance): $\geq 500\text{M}\Omega$. 7. 耐电压(Withstanding Voltage):200V AC/minute.	