


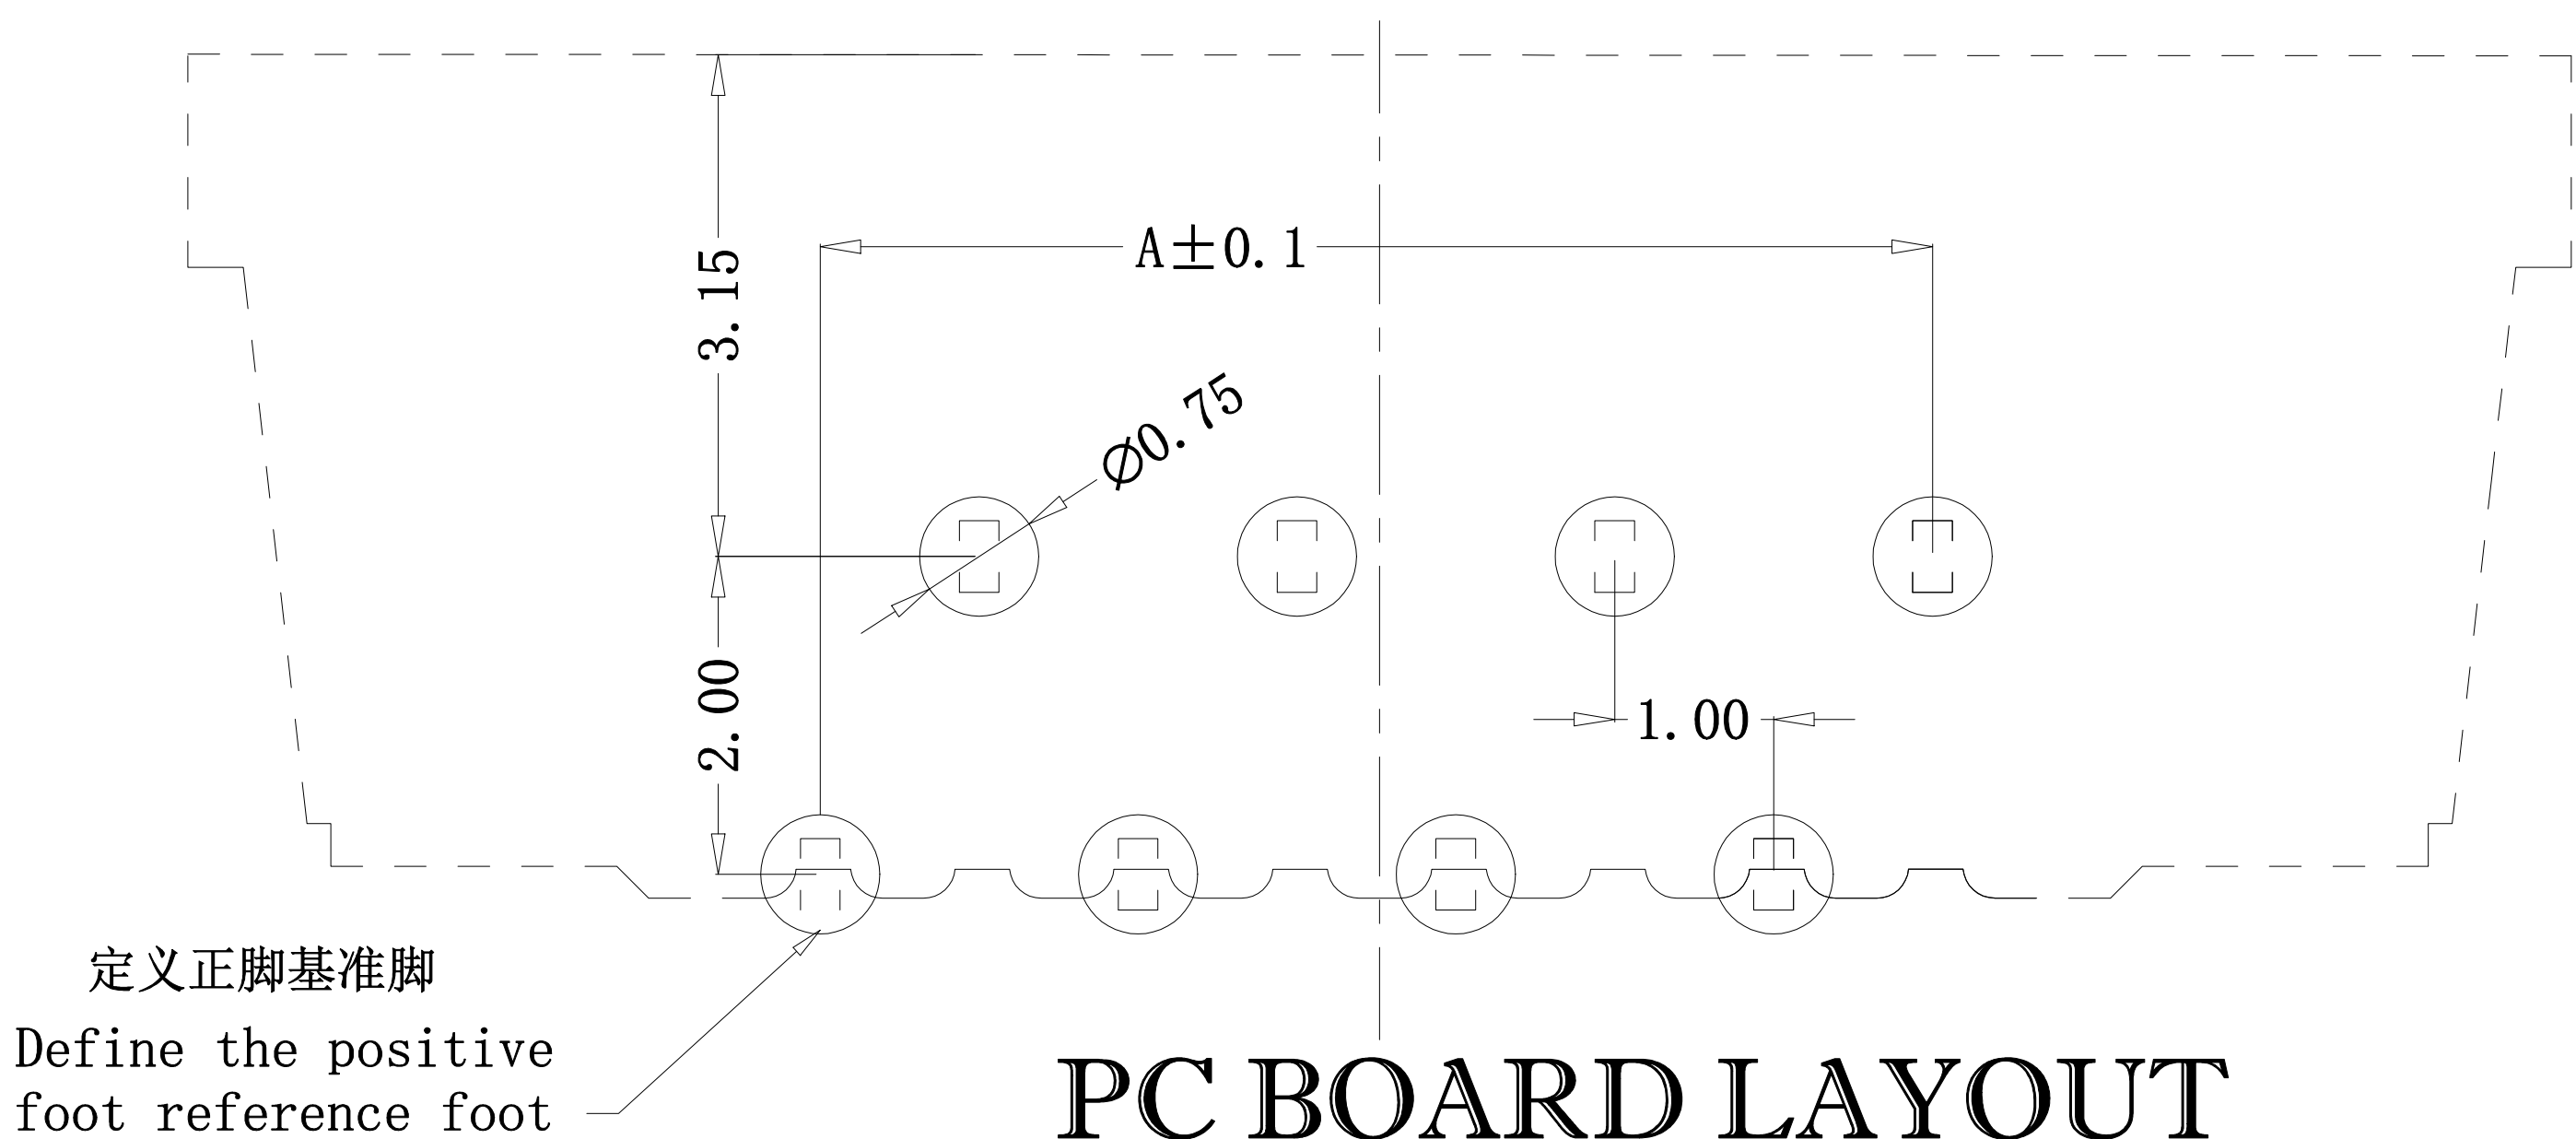



PC BOARD LAYOUT

技术要求(Technical Index):


1. 材质与表面处理(Material And Finish):
基座 (Housing) and 盖子 (Cover): LCP UL94V-0 Nature Or Black;
端子 (Terminal) :Phosphor Copper Au/Sn Plated;
焊片 (Solder) : Copper Alloy Au/Sn Plated;
2. 工作温度(Temperature range): -20° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC.
4. 额定电流: 0.5A, AC/DC.
5. 接触电阻(Contact resistance): $\leq 20\text{m}\Omega$.
6. 绝缘电阻(Insulation resistance): $\geq 800\text{M}\Omega$.
7. 耐电压(Withstanding Voltage): 500V AC/minute.

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		


孔位	A	B	C	D
6	5	7. 15	11. 20	13. 10
8	7	9. 15	13. 20	15. 10
9	8	10. 15	14. 20	16. 10
14	13	15. 15	19. 20	21. 10
15	14	16. 15	20. 20	22. 10
16	15	17. 15	21. 20	23. 10
17	16	18. 15	22. 20	24. 10
18	17	19. 15	23. 20	25. 10
20	19	21. 15	25. 20	27. 10
22	21	23. 15	27. 20	29. 10
24	23	25. 15	29. 20	31. 10
25	24	26. 15	30. 20	32. 10
26	25	27. 15	31. 20	33. 10
27	26	28. 15	32. 20	34. 10
28	27	29. 15	33. 20	35. 10
30	29	31. 15	35. 20	37. 10

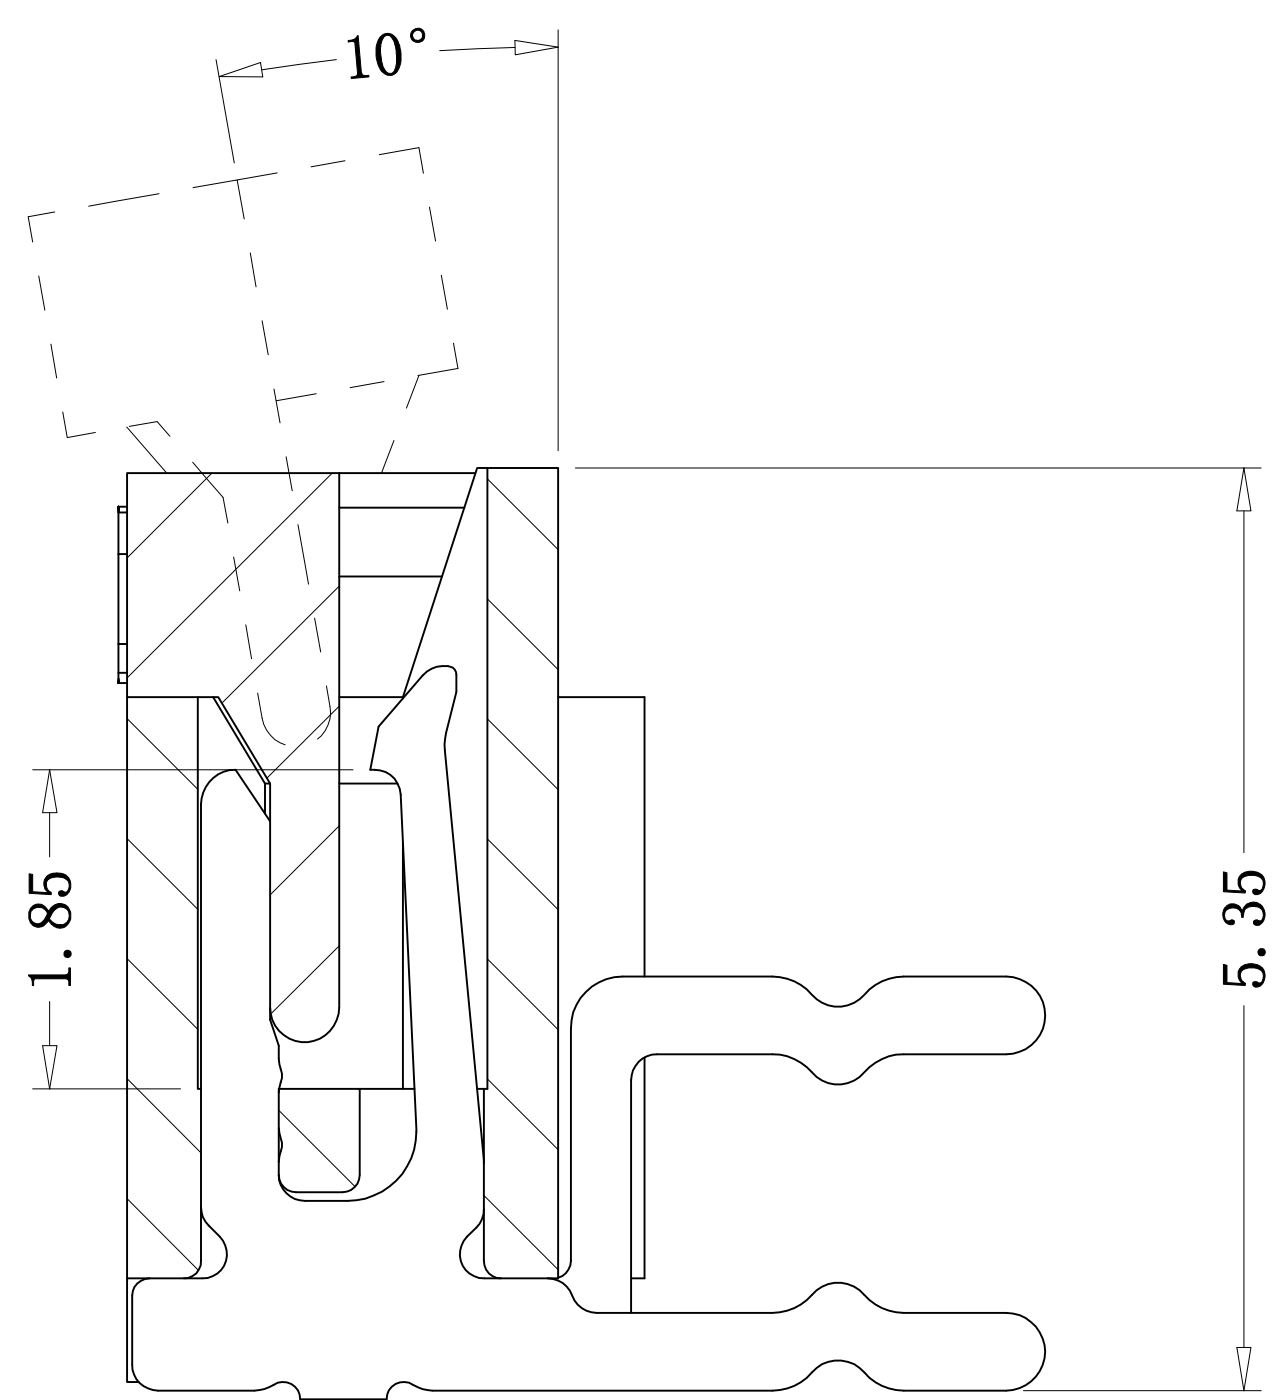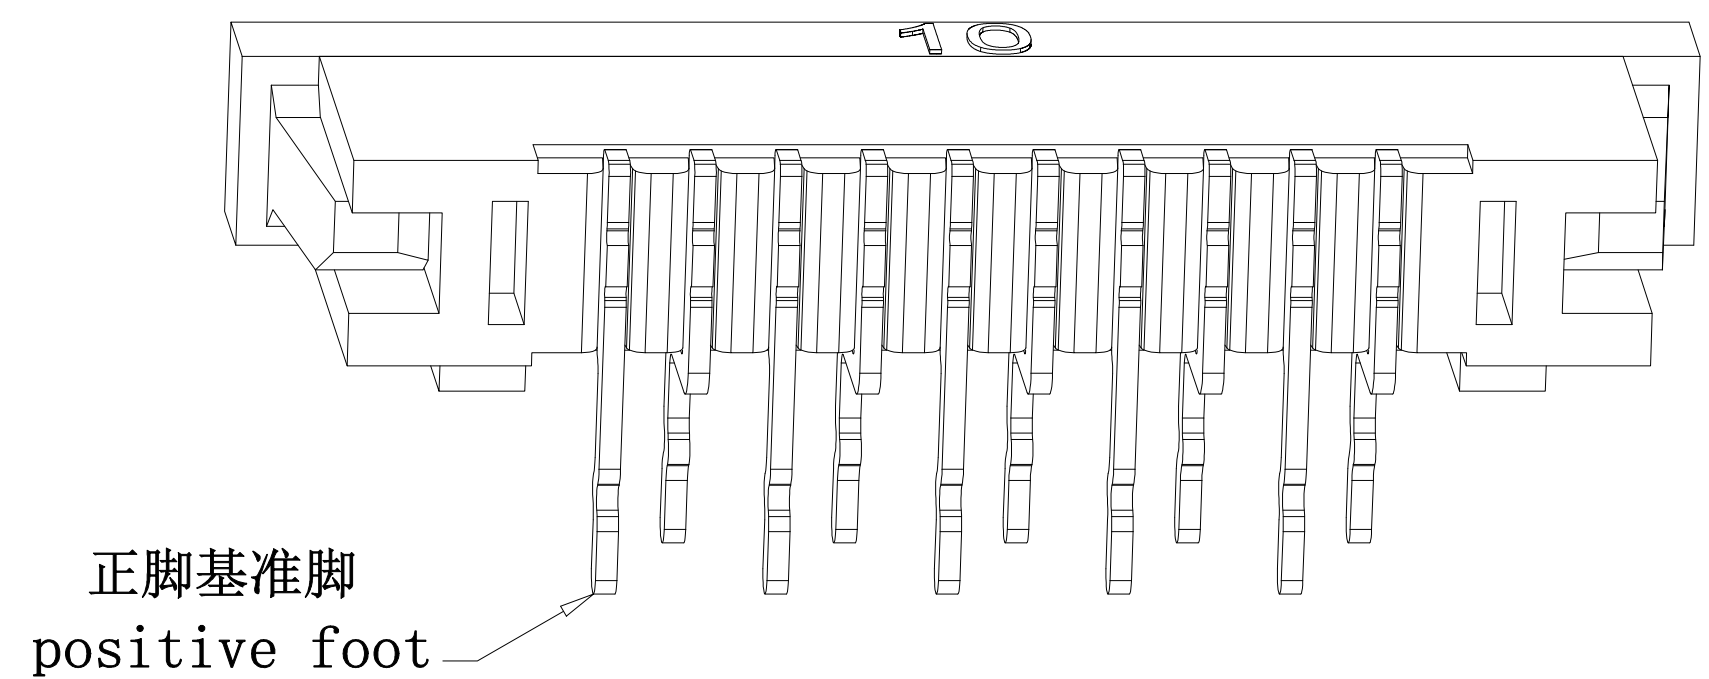

SECTION A-A

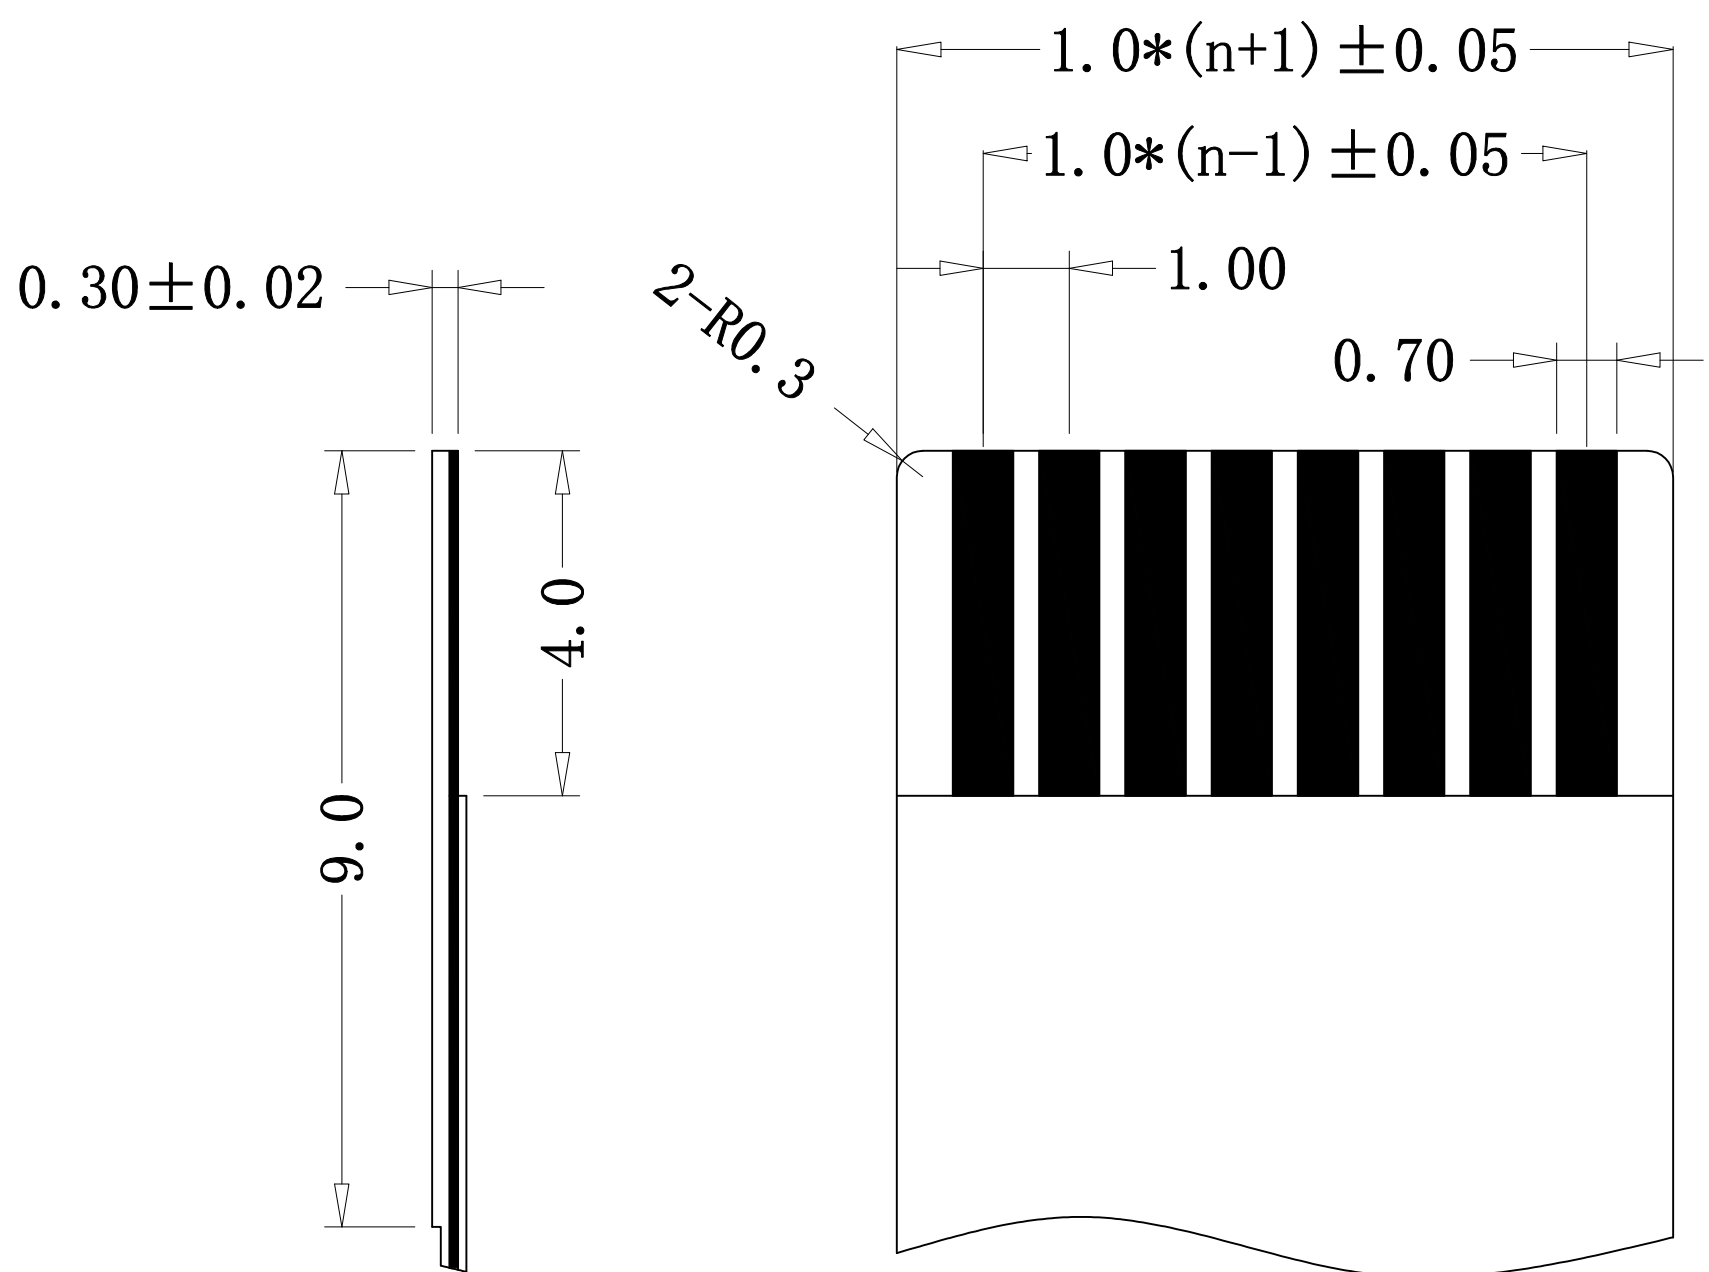

PROPER CABLE (SCALE 2:1)

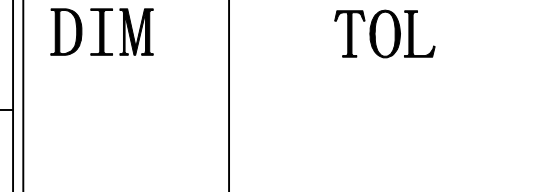DESIGN:	Xiping Huang				广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD				
CHECK:	Ke Tian								
APPROVED:	Youquan Xu			TITLE:					
DIM	TOL	DIM	TOL	1.0mm FPC 弯插式(正脚)					
X.	±0.25			PART NO.					
X. X	±0.20			1.0K-J-NPW-***					
X. XX	±0.15			REV. A SCALE: N/A UNIT: mm SHEET: 1/1 					
X. XXX									