

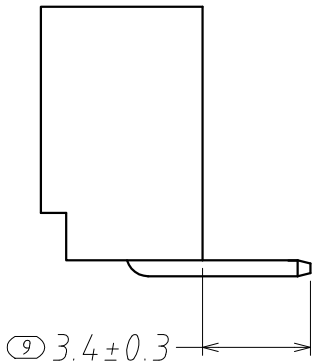
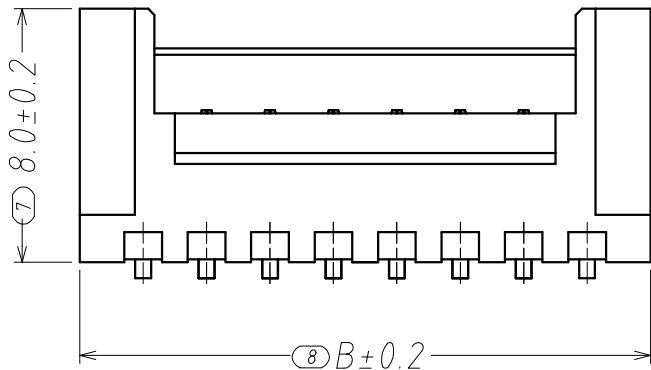
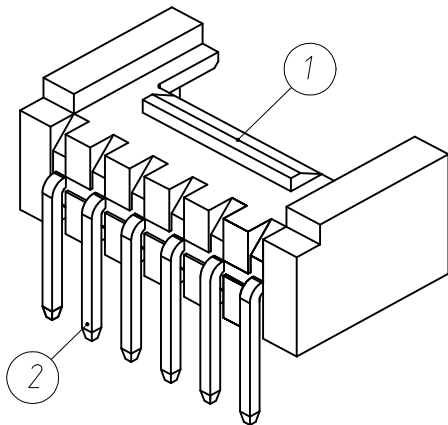


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		


- 技术参数:
- 1、所有材料符合ROHS2.0/REACH要求。
 - 2、额定电流: 2A, AC, DC;
 - 3、额定电压: 250V, AC, DC;
 - 4、温度范围: -25℃~+85℃;
 - 5、接触电阻: $\leq 0.03\Omega$;
 - 6、绝缘电阻: $\geq 1000M\Omega$;
 - 7、耐压: 1000V, AC/minute.
 - 8、产品料号:

A20002 - n AW - 02 T1

孔位 ————— 电镀
产品类型 ————— T1: 镀亮锡
AW: 弯插针座 ————— 胶芯材质
01: PA66 米色

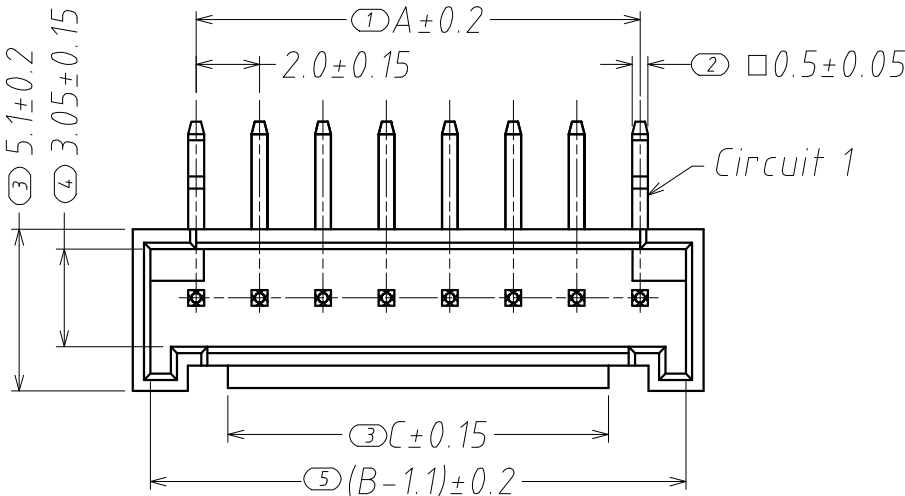

2P外观

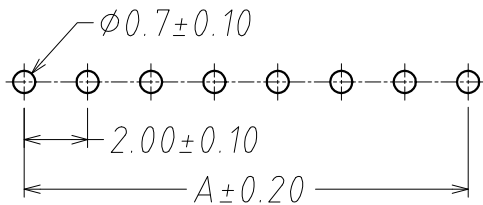

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	6.00	3.00
03	4.00	8.00	3.30
04	6.00	10.00	4.00
05	8.00	12.00	6.00
06	10.00	14.00	8.00
07	12.00	16.00	10.00
08	14.00	18.00	12.00
09	16.00	20.00	14.00
10	18.00	22.00	16.00
11	20.00	24.00	18.00
12	22.00	26.00	20.00
13	24.00	28.00	22.00
14	26.00	30.00	24.00
15	28.00	32.00	26.00

2	端子 Contact	黄铜	nx1	电镀(锡): 至少表面镀层30u"MIN, 厚镀层 80u"MIN.
1	基座 Wafer	PA66	1	绝缘
序号	名称	材料	数量	附注

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu			TITLE:			
DIM	TOL	DIM	TOL	HY2.0弯针耐温				
X.	±0.25			PART NO.				
X. X	±0.20			A20002-nAW-02T1				
X. XX	±0.15			REV. A				
X. XXX				SCALE: N/A				
				UNIT:	SHEET:			
				mm	1/1			