

REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:

- 1、所有材料符合ROHS2.0/REACH要求。
- 2、额定电流: 1A, AC, DC;
- 3、额定电压: 125V, AC, DC;
- 4、温度范围: -25℃~+85℃;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 100M\Omega$;
- 7、耐压: 500V, AC/minute.
- 8、适用线规: AWG#32 to #28
- 9、产品料号:

A12501 - n AW - 02 T1

孔位

产品类型

AW: 弯插针座


电镀

T1: 镀亮锡

胶芯材质




02: PA66米色

Circuits	Dimensions (mm)	
	A	B
02	1.25	4.30
03	2.50	5.55
04	3.75	6.80
05	5.00	8.05
06	6.25	9.30
07	7.50	10.55
08	8.75	11.80
09	10.00	13.05
10	11.25	14.30
11	12.50	15.55
12	13.75	16.80
13	15.00	18.05
14	16.25	19.30
15	17.50	20.55
16	18.75	21.80

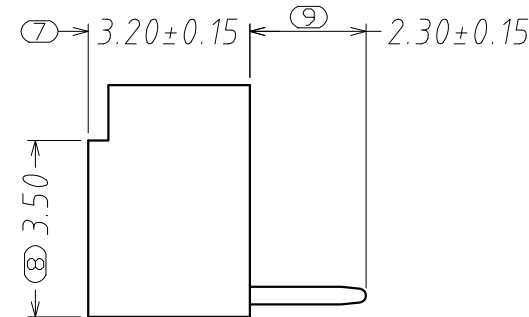

2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
1	底座 Wafer	PA66(UL94V-0)	1	米色
序号	名称	材料	数量	备注

DESIGN:	Xiping Huang				广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
CHECK:	Ke Tian							
APPROVED:	Youquan Xu			TITLE: 1. 25T弯针				
DIM	TOL	DIM	TOL					
X.	±0.25	X°	±3.0°	PART NO. A12501-nAW-02T1				
X.X	±0.20	X.X°						
X.XX	±0.15	X.XX°		REV. A SCALE: N/A UNIT: mm SHEET: 1/1				
X.XXX		X.XXX°						
								

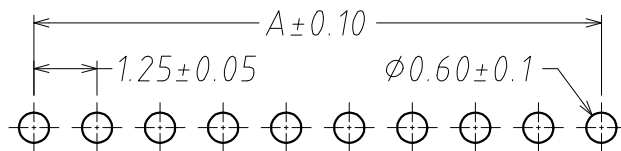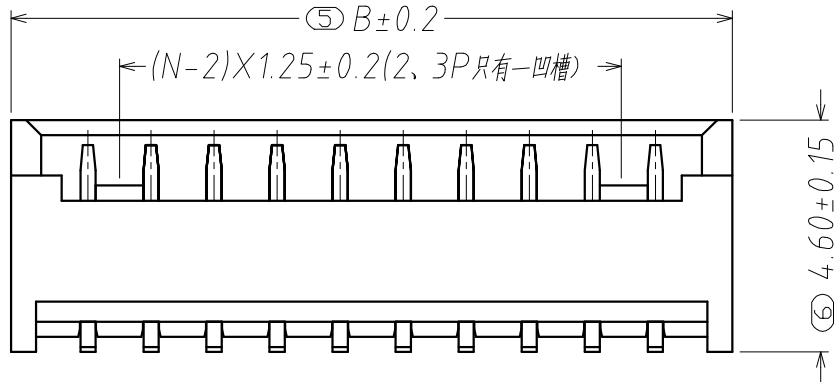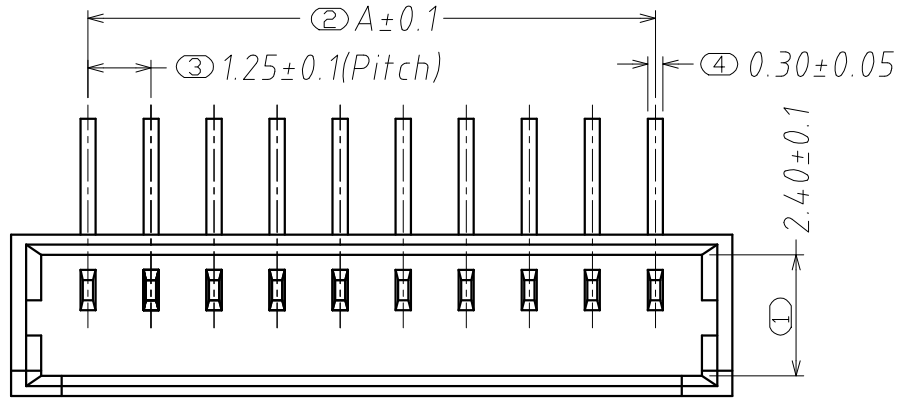

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)