

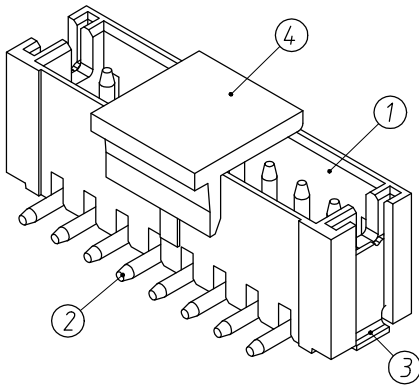
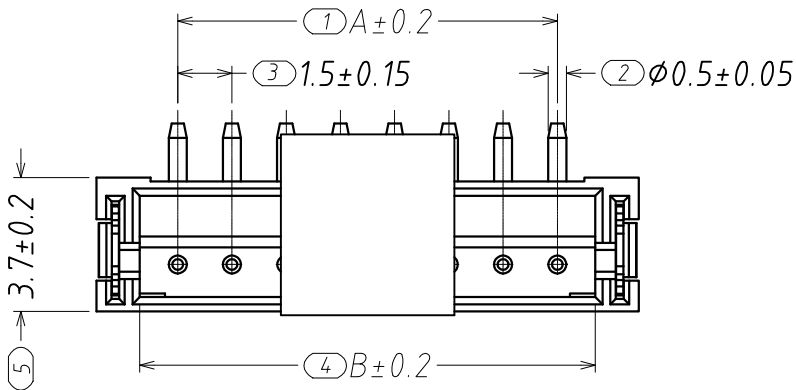
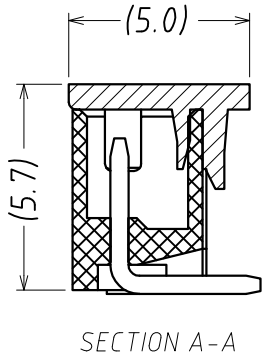



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

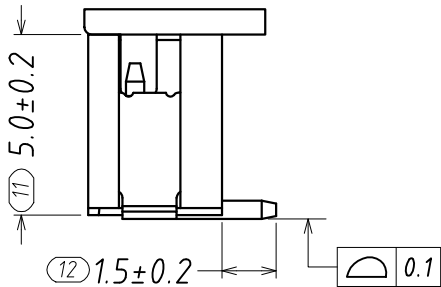

技术参数:
1、所有材料符合ROHS2.0/REACH/HF要求。
2、额定电流: 1A, AC, DC;
3、额定电压: 250V, AC, DC;
4、温度范围: -25℃~+85℃;
5、接触电阻: ≤0.02Ω;
6、绝缘电阻: ≥500MΩ;
7、耐压: 500V, AC/minute.
8、适用线规: AWG#32 to #26
9、产品料号:
A15002 - n AB - 03 T1
孔位
产品类型
AB:立贴针座
电镀
T1:镀亮锡
胶芯材质
03:LCP 本色

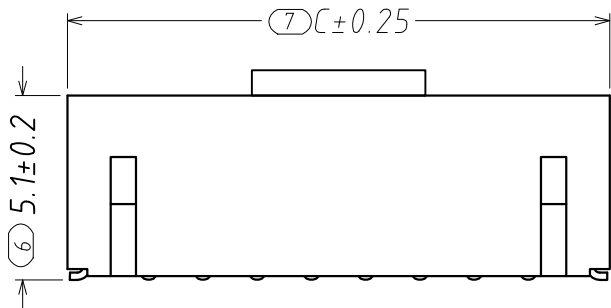

Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	6.00
03	3.00	5.10	7.50
04	4.50	6.60	9.00
05	6.00	8.10	10.50
06	7.50	9.60	12.00
07	9.00	11.10	13.50
08	10.50	12.60	15.00
09	12.00	14.10	16.50
10	13.50	15.60	18.00
11	15.00	17.10	19.50
12	16.50	18.60	21.00
13	18.00	20.10	22.50
...	...	...	...
20	28.50	30.60	33.00

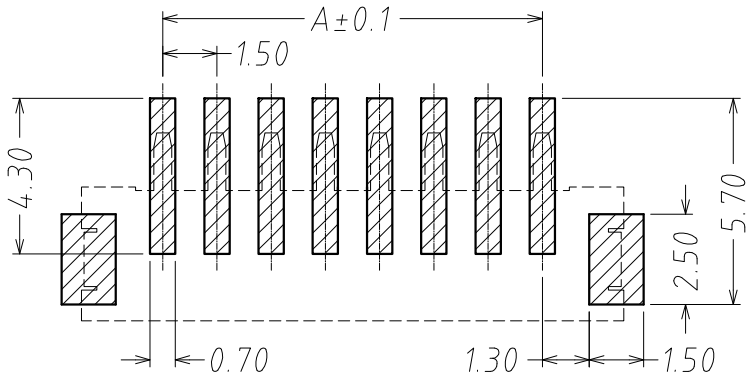

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

4	盖子 Cap	LCP (UL94V-0)	1	本色
3	焊片 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u" MIN.
2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u" MIN.
1	底座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

DESIGN:		Xiping Huang			广东国连电子有限公司			
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
APPROVED:		Youquan Xu			TITLE:			
DIM	TOL	DIM	TOL	ZH1.5立贴针座				
X.	±0.25			PART NO. A15001-nAB-03T1				
X. X	±0.20	X°	±3.0°					
X. XX	±0.15	X. X°		REV. A				
X. XXX		X. XX°						SCALE: N/A
		X. XXX°		UNIT: mm				
								SHEET: 1/1
								