

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

技术参数:

1、所有材料符合ROHS2.0/REACH/HF要求。

2、额定电流: 1A, AC, DC;

3、额定电压: 50V, AC, DC;

4、温度范围: -25℃~+85℃;

5、接触电阻: $\leq 0.03\Omega$;

6、绝缘电阻: $\geq 100M\Omega$;

7、耐压: 500V, AC/minute.

8、适用线规: AWG#30 to #26

9、产品料号:






A12504 - n AB - 03 T1

孔位 — n — AB — 03 — T1 — 电镀


产品类型 — — — — — T1: 镀亮锡

AB: 立贴针座 — — — — — 胶芯材质

03: LCP 本色

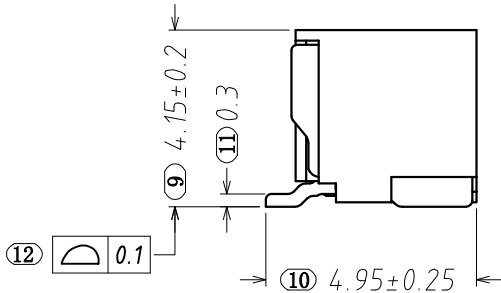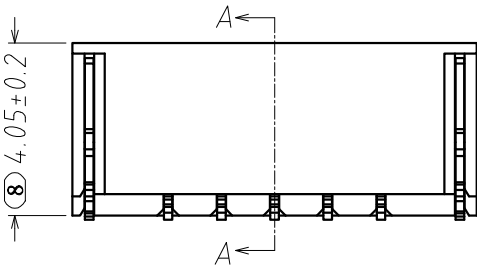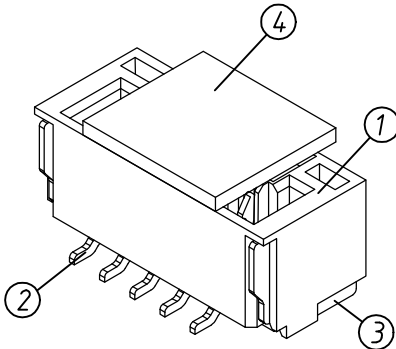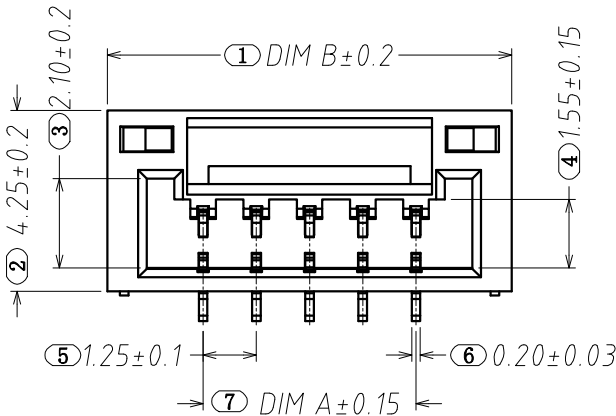

SECTION A-A

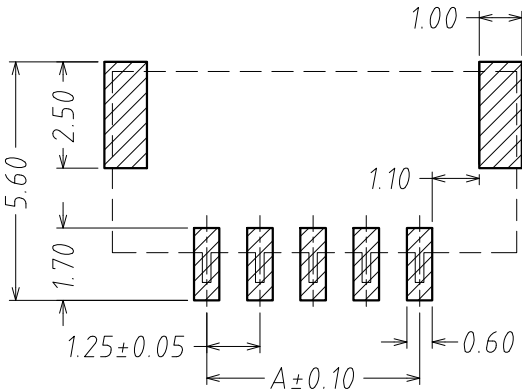

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)	
	A	B
02	1.25	5.75
03	2.50	7.00
04	3.75	8.25
05	5.00	9.50
06	6.25	10.75
07	7.50	12.00
08	8.75	13.25
09	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00
16	18.75	23.25

4	吸盖 Cap	LCP (UL94V-0)	1	本色
3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u". MIN.
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u". MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

DESIGN:		Xiping Huang			广东国连电子有限公司				
CHECK:		Ke Tian			GUANGDONG GUOLIAN ELECTRONICS CO.,LTD				
APPROVED:		Youquan Xu		TITLE:					
DIM	TOL	DIM	TOL	GH1.25立贴					
X.	±0.25			PART NO. A12504-nAB-03T1					
X. X	±0.20	X°	±3.0°						
X. XX	±0.15	X. X°		REV. A					
X. XXX		X. XX°							
		X. XXX°		UNIT: mm					
									