
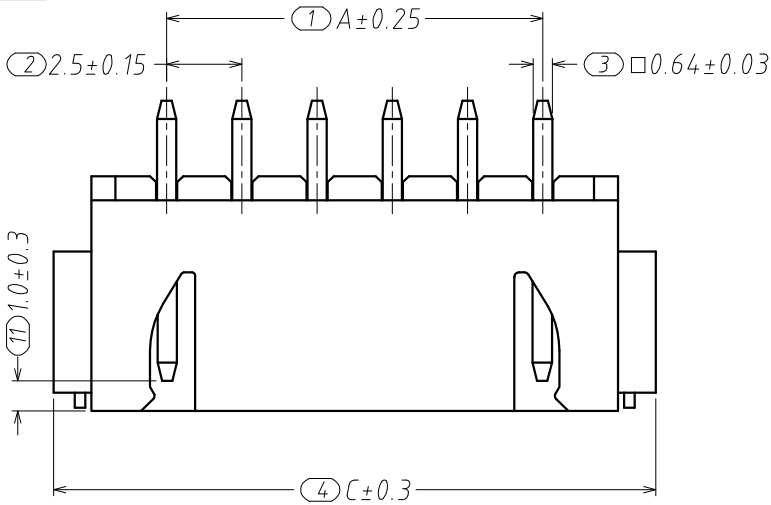


技术参数:


- 1、所有材料符合ROHS2.0/REACH/HF要求。
- 2、额定电流: 3A, AC, DC;
- 3、额定电压: 250V, AC, DC;
- 4、温度范围: -25℃~+85℃;
- 5、接触电阻: ≤0.02Ω;
- 6、绝缘电阻: ≥1000MΩ;
- 7、耐压: 1000V, AC/minute.
- 8、产品料号:
A25001 - n AWB - 03 T1

孔位 ———— 电镀
产品类型 ———— T1: 镀亮锡
AWB: 卧贴针座 ———— 胶芯材质
03: LCP 本色

Circuits	Dimensions (mm)		
	A	B	C
02	2.50	5.90	10.00
03	5.00	8.40	12.50
04	7.50	10.90	15.00
05	10.00	13.40	17.50
06	12.50	15.90	20.00
07	15.00	18.40	22.50
08	17.50	20.90	25.00
09	20.00	23.40	27.50
10	22.50	25.90	30.00
11	25.00	28.40	32.50
12	27.50	30.90	35.00
13	30.00	33.40	37.50
14	32.50	35.90	40.00
15	35.00	38.40	42.50
16	37.50	40.90	45.00

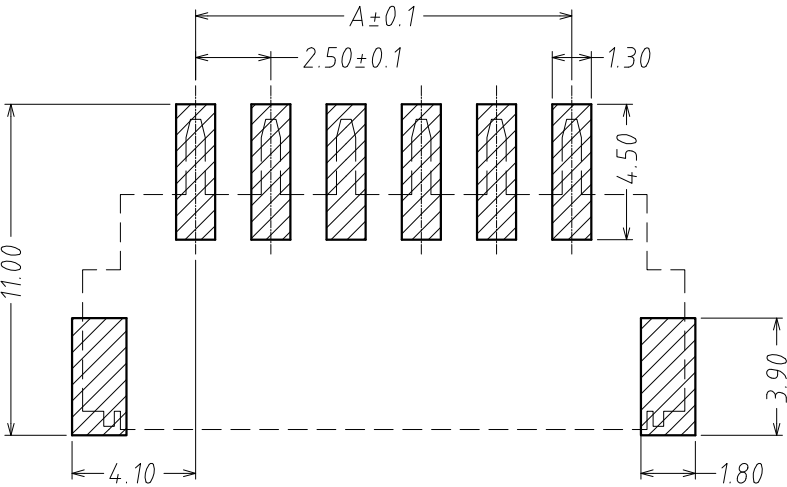

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



2PIN外观

3	焊片 fitting	黄铜	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
2	端子 Contact	黄铜	nx1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

DESIGN:	Xiping Huang		广东国连电子有限公司	
CHECK:	Ke Tian		GUANGDONG GUOLIAN ELECTRONICS CO., LTD	
APPROVED:	Youquan Xu		TITLE: XH2. 5卧贴	
DIM	TOL		PART NO. A25001-nAWB-03T1	
X.	±0.25	REV. A		
X. X	±0.20	SCALE: N/A		
X. XX	±0.15	UNIT: mm		
X. XXX		SHEET: 1/1		