



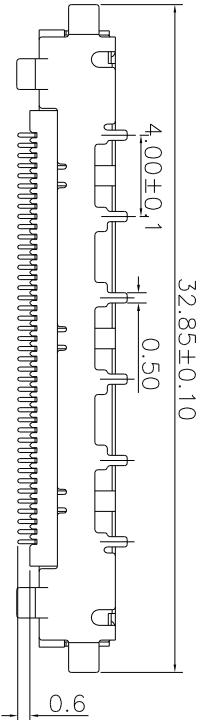
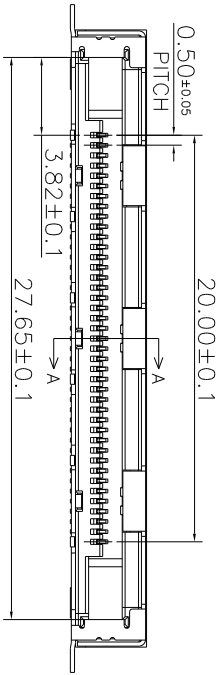
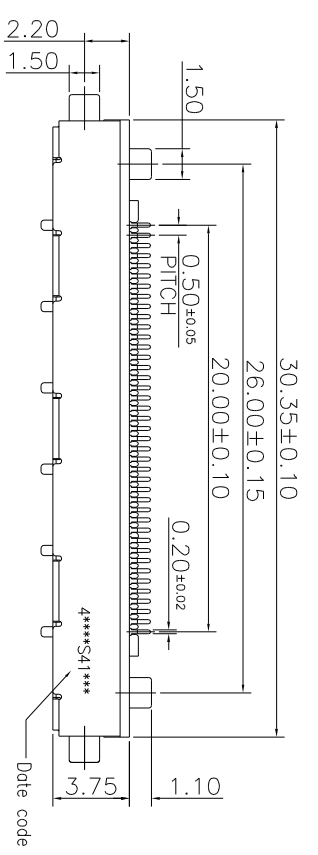
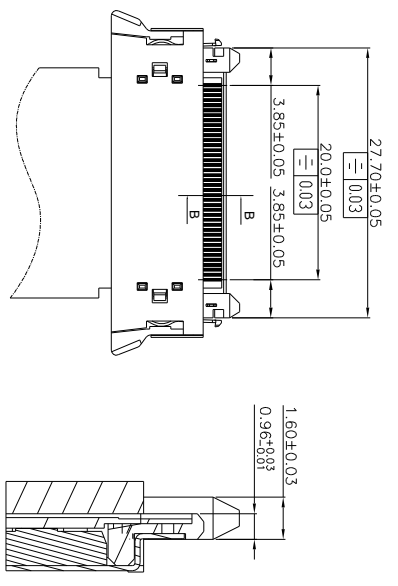


R O H S

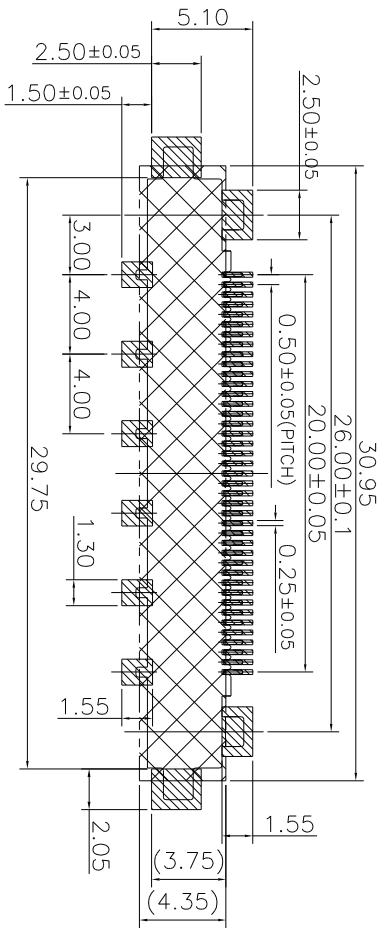

- NOTES:
- HUOSING: LCP HIGH-TEMP THERMOPLASTIC U94V-0 COLOR:BLACK
 - TERMINAL:PHOSPHOR BRONZE
PLATING:50U" MIN NICKEL ALL OVER 100U"MIN Tin ON SOLDER AREA
1* COLD FLASH ON CONTACT AREA
 - SHELL:STAINLESS STEEL
PLATING:100~150U" TIN(LEAD FREE)
OVERALL 50~100U" NICKEL UNDER PLATED.
 - SPECIFICATION:
CURRENT RATING: 0.5A 50V AC/DC
CONTACT RESISTANCE: 40mΩ MAX
INSULATION RESISTANCE: 100MΩ AT 500V DC
OPERATING TEMPERATURE RANGE: -55C~+85C
WITHSTANDING VOLTANG: 250V AC/minute



REV/ECN	NO.	LOGAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING	22.12.01	Jemply

RECOMMEND P.C.B LAYOUT
TOLERANCE : ±0.1

DESIGN:	Jemply	TITLE:	广东国连电子有限公司 GUANGDONG GUILIAN ELECTRONICS CO., LTD		
CHECK:	Ke Tian	PART NO.	05375-41R-SN-R		
APPROVED:	Youquan Xu	SCALE:	N/A		
DIM	TOL	DIM	TOL	REV.A	UNIT: mm
X	±0.25	X*	±30°		SHEET
XX	±0.20	XX*			1/1
XXX	±0.15	XXX*			
XXXX		XXXX*			