
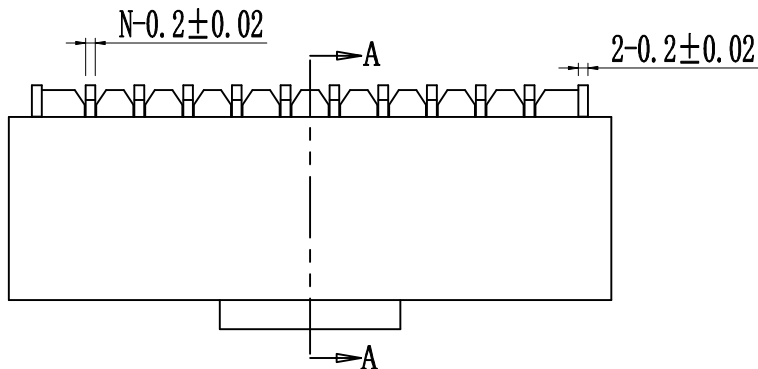
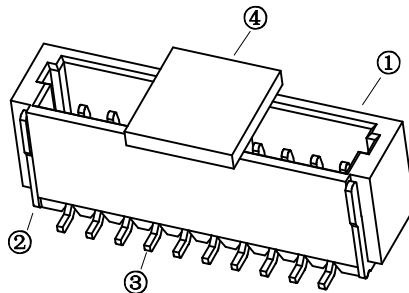
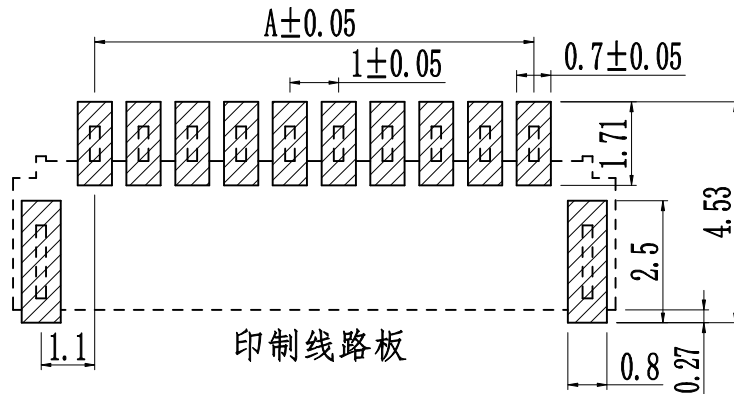
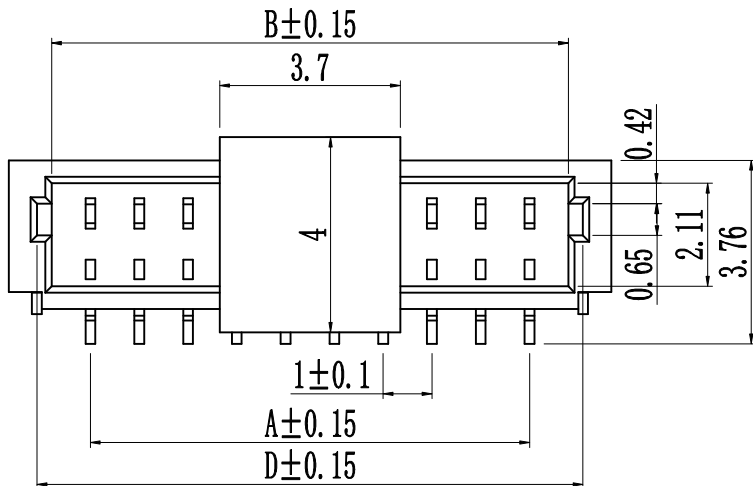
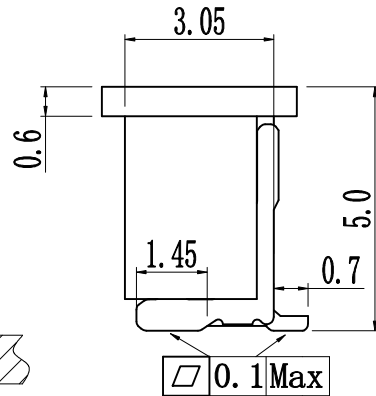
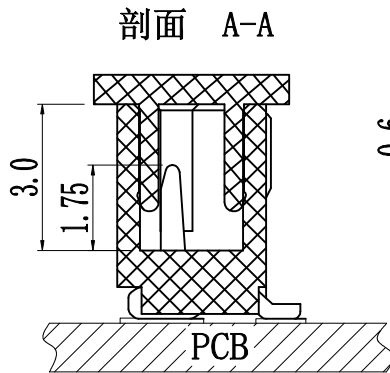


REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

1. 技术参数:
- 1.1 额定电流: 1.0A AC/DC
- 1.2 额定电压: 50V AC/DC
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 100MΩ MIN
2. 工作温度: -25℃~+85℃

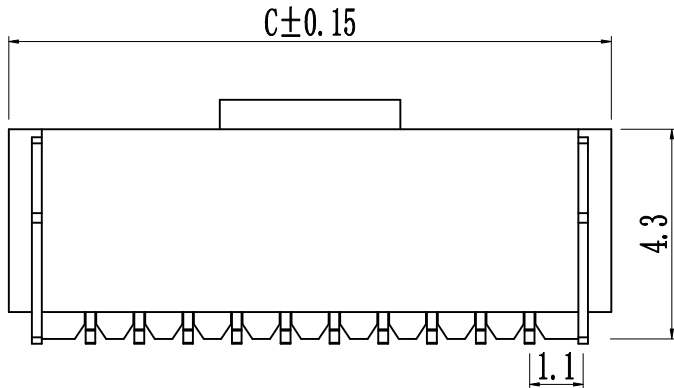

Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.0	2.5	4.3	3.2
3PIN	2.0	3.5	5.3	4.2
4PIN	3.0	4.5	6.3	5.2
5PIN	4.0	5.5	7.3	6.2
6PIN	5.0	6.5	8.3	7.2
7PIN	6.0	7.5	9.3	8.2
8PIN	7.0	8.5	10.3	9.2
9PIN	8.0	9.5	11.3	10.2
10PIN	9.0	10.5	12.3	11.2
11PIN	10.0	11.5	13.3	12.2
12PIN	11.0	12.5	14.3	13.2
13PIN	12.0	13.5	15.3	14.2
14PIN	13.0	14.5	16.3	15.2
15PIN	14.0	15.5	17.3	16.2
16PIN	15.0	16.5	18.3	17.2
17PIN	16.0	17.5	19.3	18.2
18PIN	17.0	18.5	20.3	19.2
19PIN	18.0	19.5	21.3	20.2
20PIN	19.0	20.5	22.3	21.2

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	LCP	本色
②	焊片	2 PCS	磷铜C5191	亮锡
③	PIN针	2~16 PCS	磷铜C5191	亮锡
④	盖板	1 PCS	LCP	本色

DESIGN:	Xiping Huang		
CHECK:	Ke Tian		
APPROVED:	Youquan Xu		
DIM	TOL	DIM	TOL
X.	±0.25	X°	±3.0°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX		X.XXX°	

 广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO., LTD			
TITLE: 1.0立贴			
PART NO. 1.0-P-NPB			
REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1